
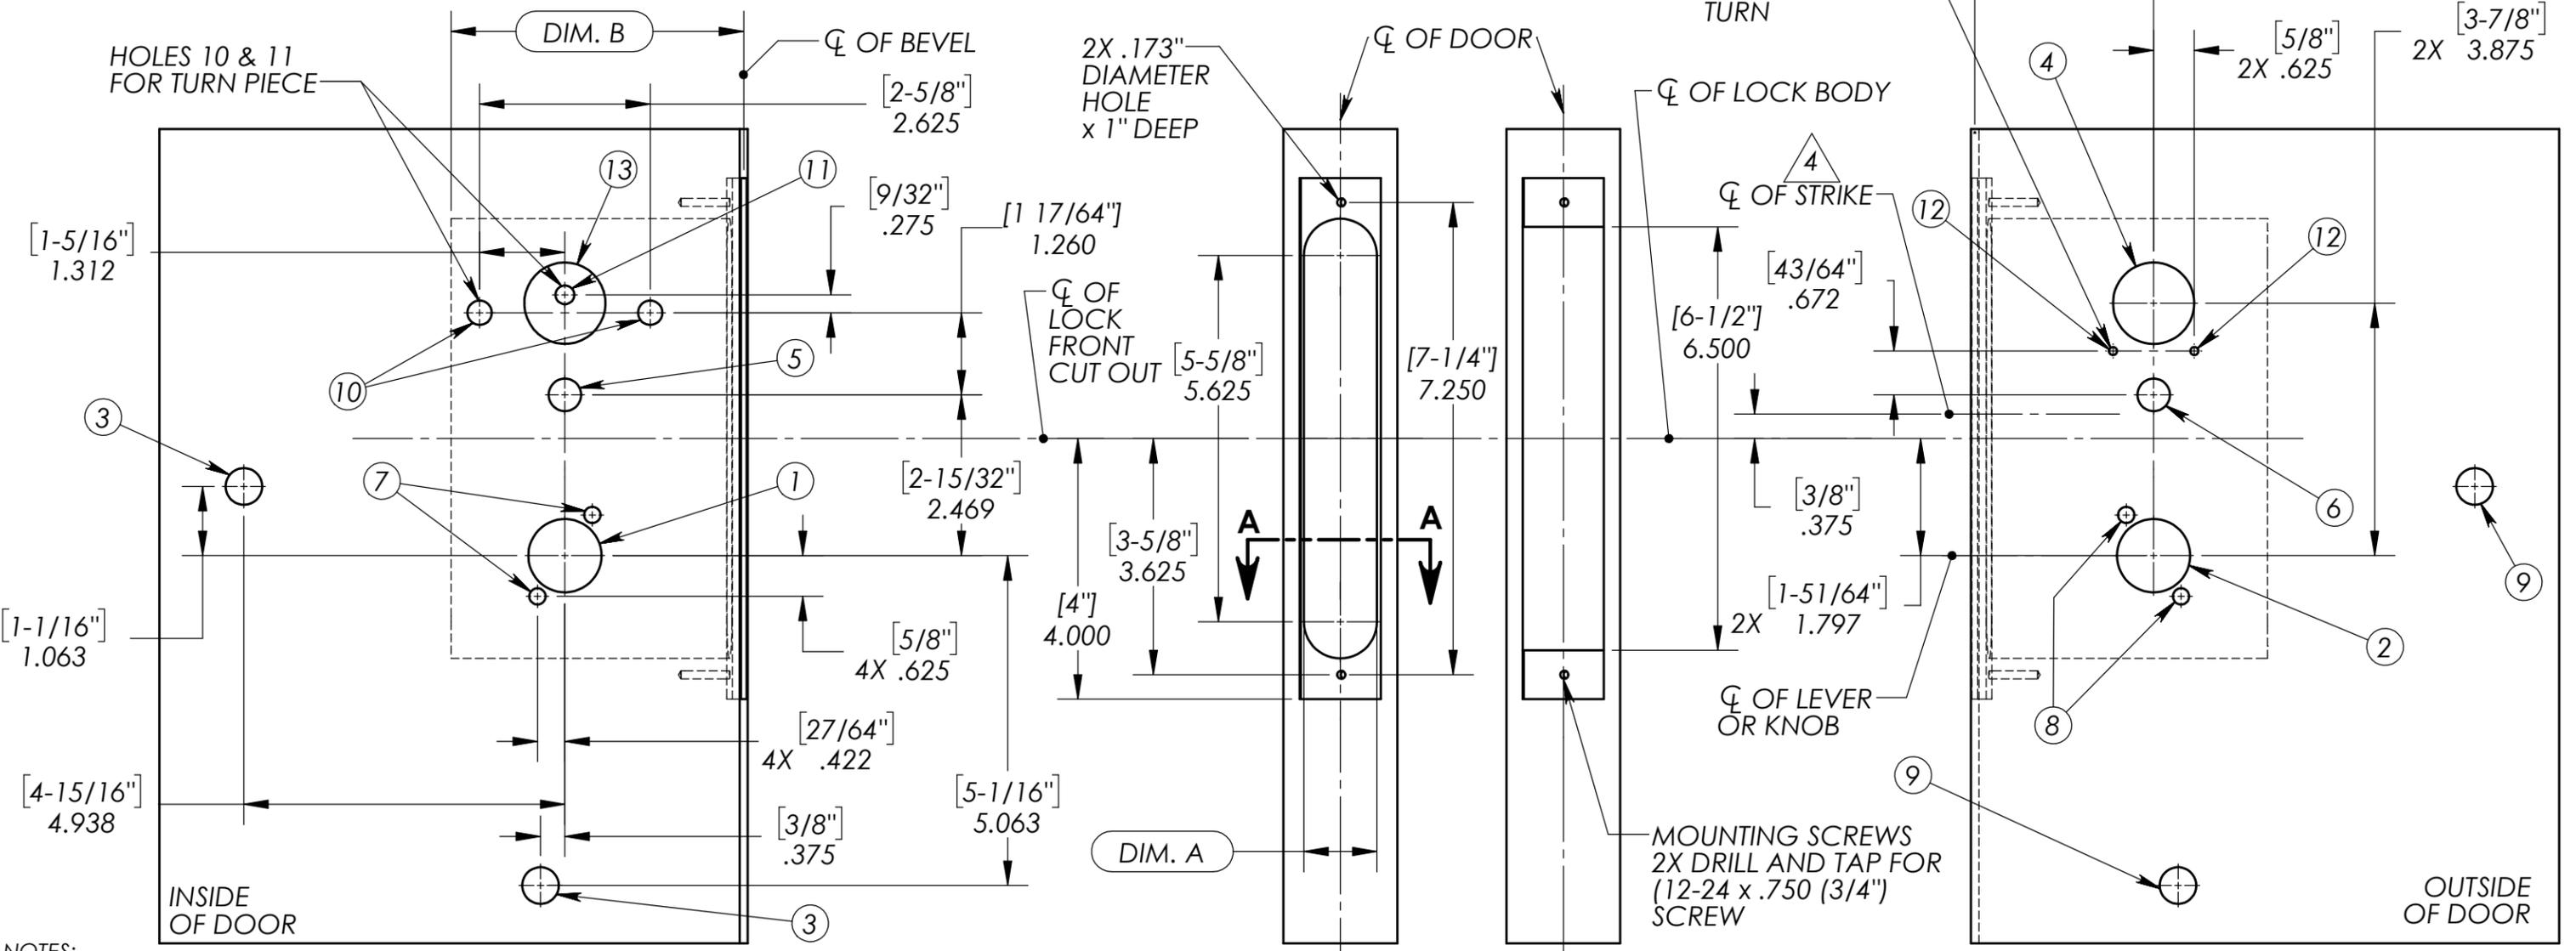


THIS TEMPLATE COVERS THE 8200 & 9200 SERIES LOCKSET IN ACCORDANCE WITH THE SPECIFICATIONS INDICATED BELOW:

LOCK LINES & VARIATIONS	VARIABLE DIMENSIONS	
	DIM. A	DIM. B
8200 & 9200	1.125 [1-1/8"]	4.563 [4-9/16"]
8270-8273 FUNCTIONS, 56/NAC/RX/LX/DX PREFIX	1.250 [1-1/4"]	4.563 [4-9/16"]
74- PREFIX	1.125 [1-1/8"]	4.563 [4-9/16"]

FUNCTION	REQUIREMENTS												
	1	2	3	4	5	6	7	8	9	10	11	12	13
04, 27, 30, 37, 55, 70, 71, NAC-270/271	1.125 (1-1/8") DIA.	1.125 (1-1/8") DIA.	.563" (9/16") DIA.	1.250 (1-1/4") DIA.	.625" (5/8") DIA.	.625" (5/8") DIA.	.250 (1/4") DIA.	.250 (1/4") DIA.	.563" (9/16") DIA.	.375" (3/8") DIA.	.281" (9/32") DIA.	.125 (1/8") DIA.	1.250 (1-1/4") DIA.
05*, 24, 25, 28, 43, 45, 47, 50, 51, 56, 57, 58, 67, NAC-280/281	■	■	■	■	■		■	■	■	■	■		
15, NAC-274/275	■	■	■				■	■	■				
16, 17, 26, 29, 38, 39, 40, 41, 42, 46, 48, 49, 52, 59, 72, 73	■	■	■	■			■	■	■				■
65, 66, 68	■	■	■		■	■	■	■	■	■	■	■	
NAC-284/285	■	■	■		■		■	■	■	■	■	■	

*ALL 05 FUNCTION LOCKS MANUFACTURED PRIOR TO 7/6/04 USE 55 FUNCTION DOOR PREP.

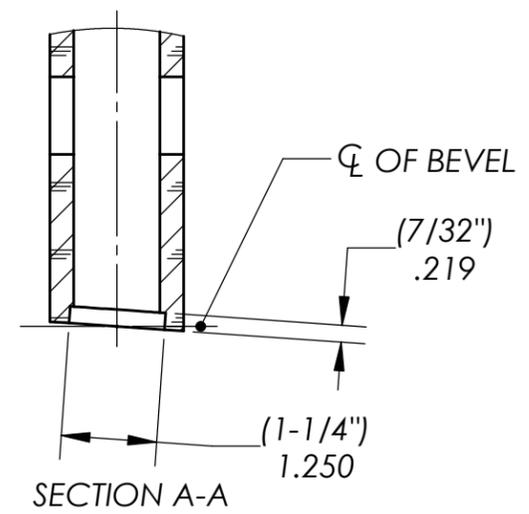

- NOTES:
- DENOTES HOLE REQUIRED FOR FUNCTION LISTED. (CHECK TABLE BEFORE CUTTING HOLE.)
 - REFER TO TRIM TEMPLATE FOR ADDITIONAL HOLE REQUIREMENTS.
 - SUITABLE REINFORCEMENTS REQUIRED FOR METAL DOORS.
 - FOR DETAILS, SEE STRIKE TEMPLATE 7063.
 - FOR ADDITIONAL DETAIL FOR ELECTRICALLY OPERATED FUNCTIONS (70, 71, 72, 73 & ALL NAC), SEE TEMPLATE 7065.

DETAIL OF SUGGESTED DOOR-CUT

SARGENT	
ASSA ABLOY	
TEMPLATE: 8200 & 9200 BHW LEVER	3/19/26
	47117