


REQUIRED HOLES		
	1	2
FUNCTION	[1-1/8"] 1.125" DIA. [+1/32" -0"] +.031 -0	[5/16"] .312" DIA. [±1/64"] ±.016"
RDLU15, RDLU15-3	■	
RDLU65	■	■

VARIABLE DIMENSIONS			
DOOR THICKNESS	DIMENSION "A"	DIMENSION "B"	DIMENSION "C"
1-3/4" (STANDARD)	[2-3/4"±1/32"] 2.750"±.031"	[1-1/8" +1/32"/-0"] 1.125"+.031"/-0"	[4-3/8"+1/16"/-0"] 4.125+.063"/-0"
1-3/8" (20- PREFIX)	[2-3/8"±1/32"] 2.375"±.031"	[1" +1/32"/-0"] 1.000"+.031"/-0"	[4"+1/16"/-0"] 4.000+.063"/-0"

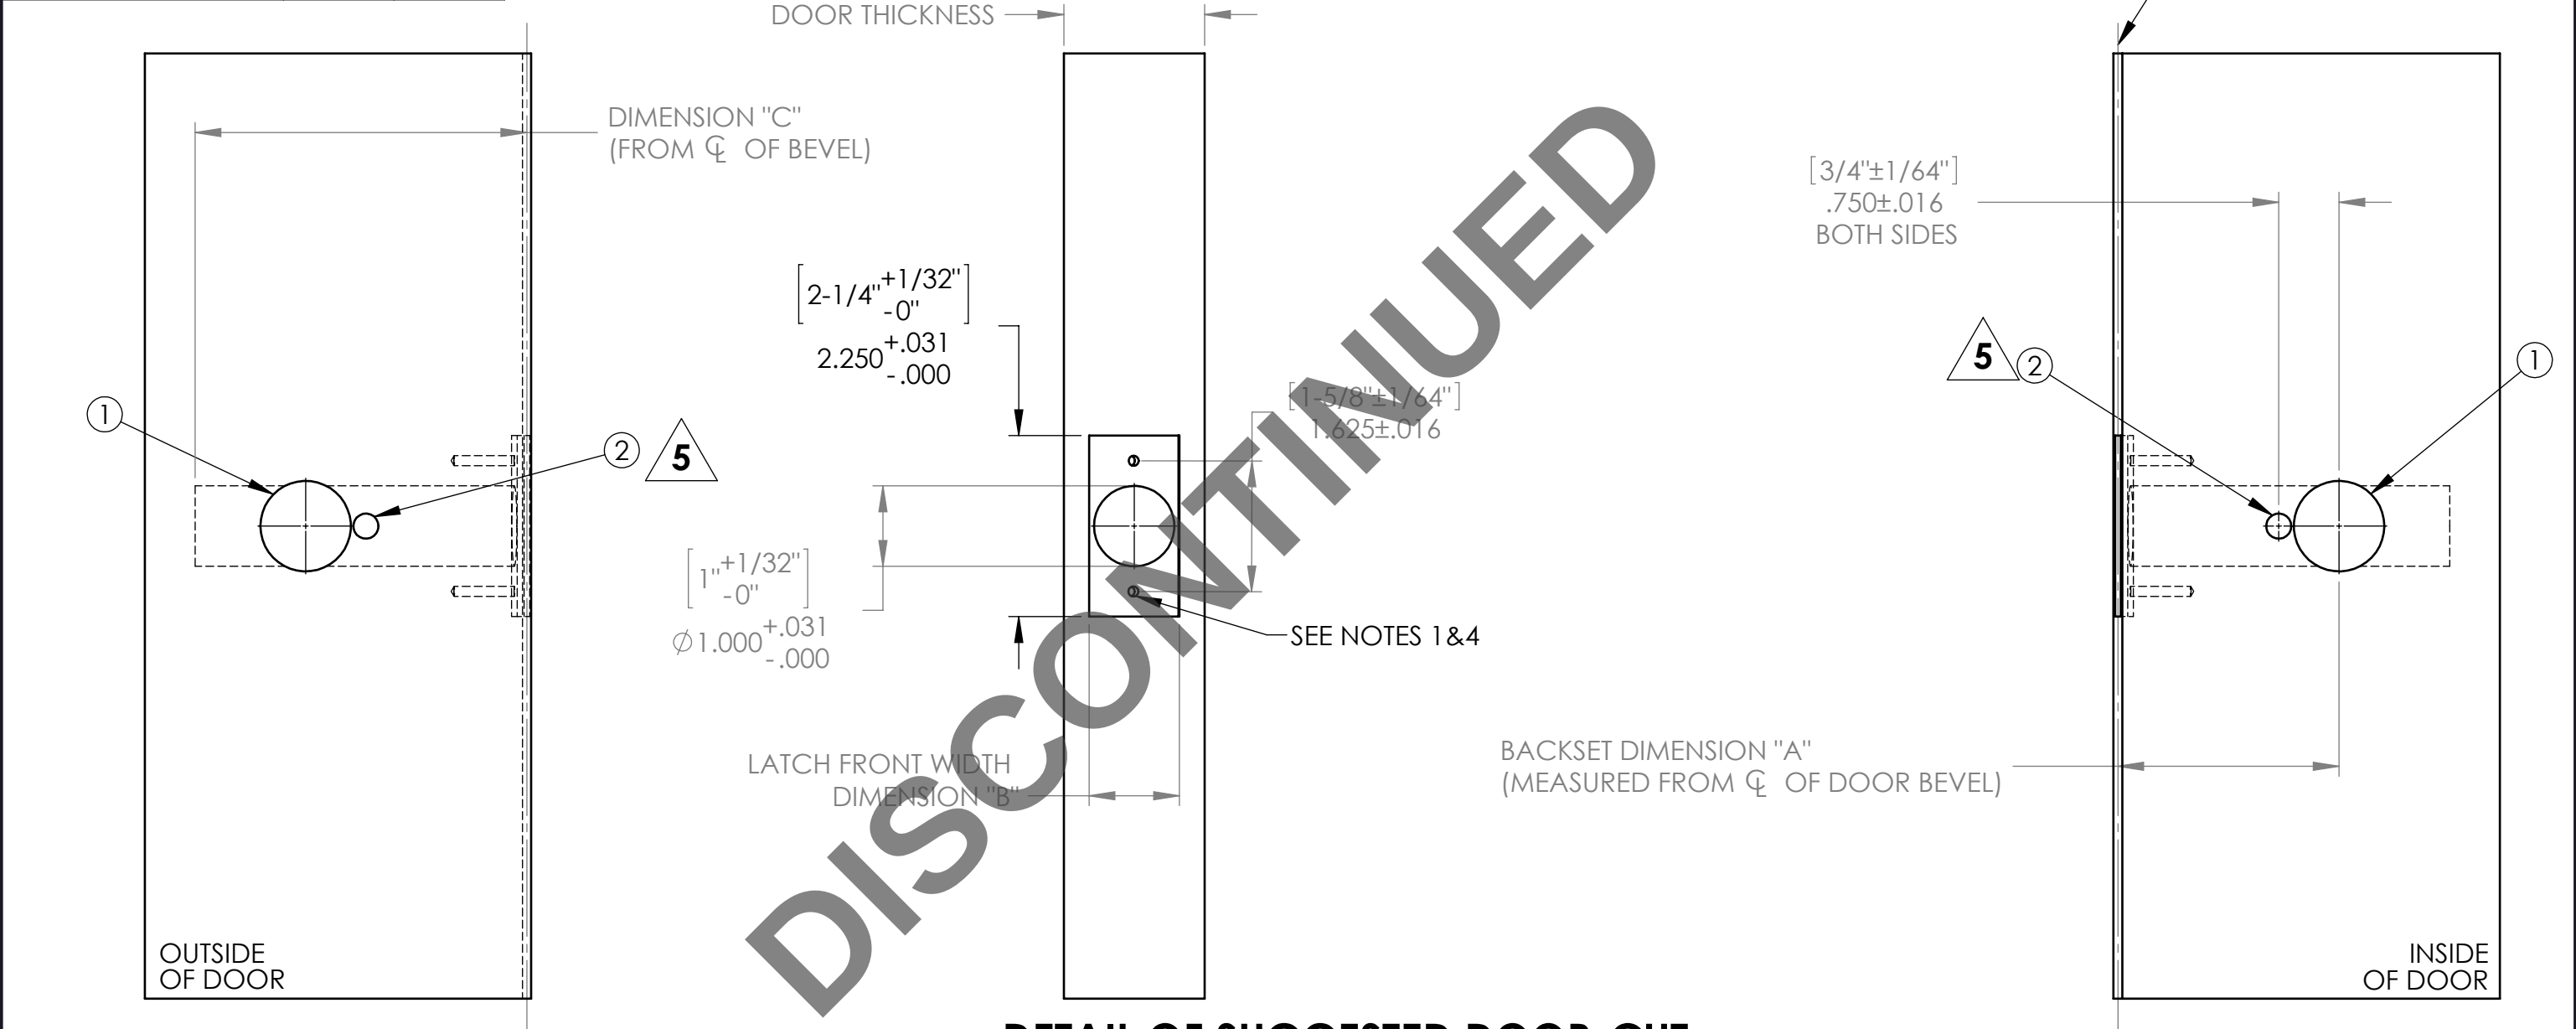

- NOTES:
1. DRILL 1/8" DIAMETER BY 3/4" DEEP (WOOD) OR DRILL AND TAP FOR #8-32 UNC BY 3/4" DEEP (METAL). TWO HOLES REQUIRED.
 2. FOR PREPARATION DIMENSIONS NOT SHOWN, REFERENCE ANSI A115.2 STANDARD.
 3. FOR STRIKE PREPARATION TEMPLATE: 3911 (STANDARD), 4421 (14 PREFIX), 4049 (28 PREFIX).
 4. LATCH FRONT CUT IS PARALLEL WITH DOOR BEVEL AS SHOWN. DRILLED HOLES ARE PERPENDICULAR TO DOOR BEVEL.
 5. ■ DENOTES HOLE REQUIRED FOR FUNCTION LISTED. (CHECK TABLE BEFORE CUTTING HOLE.) FOR RDLU93 & RDLU94 FUNCTIONS SEE TEMPLATE 4666.

SARGENT ASSA ABLOY		Sargent Manufacturing Company 100 Sargent Drive New Haven, CT 06511	
TEMPLATE FOR RDL BORED LOCK ONLY		RELEASE DATE 12-AUG-2013	
		TEMPLATE NO. 4646 B	