


**Notes:**

1. Backset is measured from centerline of bevel which is centerpoint of door thickness.
2. Door prep with 2-3/4" (70) backset meets ANSI/BHMA standards A156.115 for steel doors and A156.115W for wood doors .
3. Dimensions given in inches and (mm).
4. 1-1/4" strike lip suits frame for 1-3/4" thick door. Lip will vary for other door thicknesses.


TEMPLATE CROSS REFERENCE	
DESCRIPTION	TEMPLATE
TL3750/50S/70 Dummy Trim	T31049
217L13 ANSI Strike	T30543
SF114, SFR114 Full Lip Strike	T30683

FRONT WIDTH B	
1-1/8 (28.6)	Regular
1" (25.4)	Optional


**SQUARE EDGE**

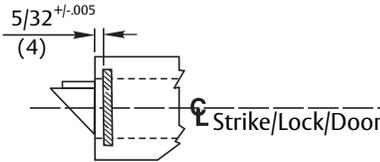

**BEVELED EDGE**


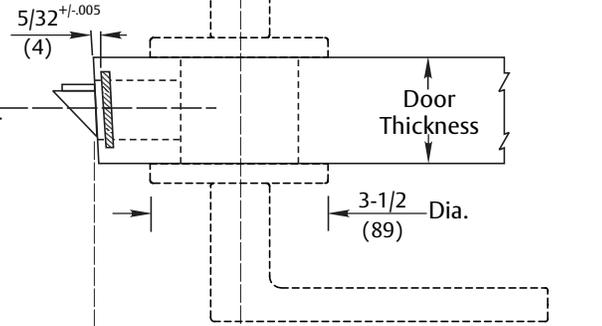


**CAUTION: DOOR AND FRAME MANUFACTURE**  
 When door gasketing or silencers are used, proper allowances must be made for strike location to maintain a common centerline with lock and door as shown so that bolt will freely enter strike.

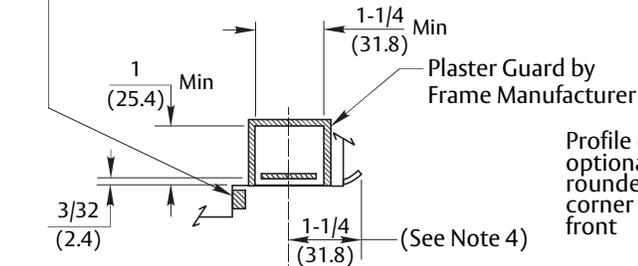

Profile of optional rounded corner front

BACKSET	
2-3/4 (69.9)	Regular
2-3/8 (60.3)	Optional

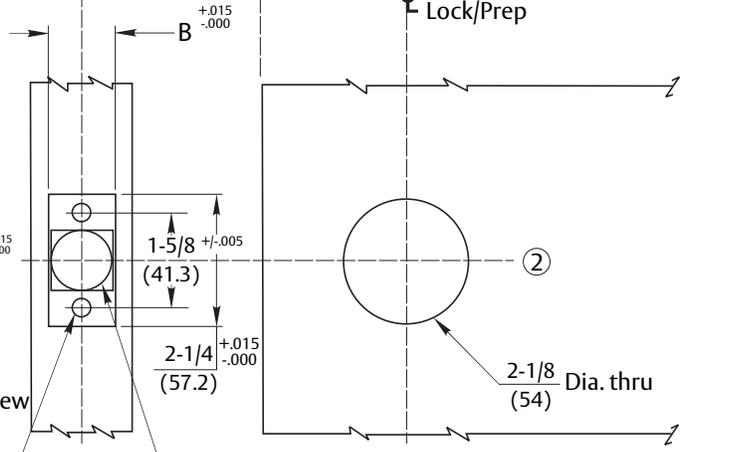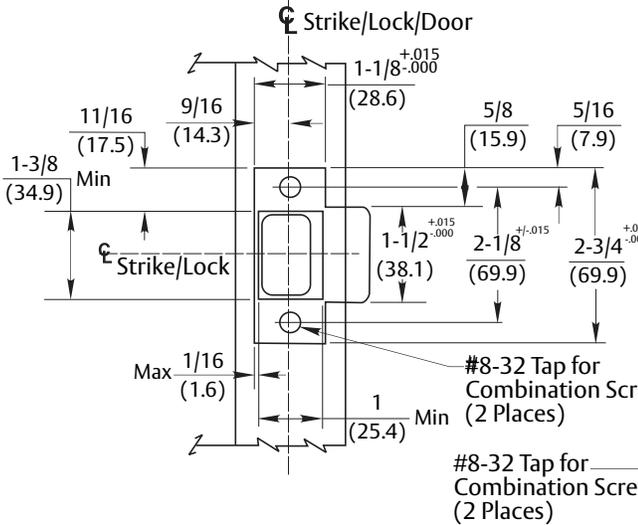

**FRAME DETAIL**  
 1/4" Curved Lip "T" Strike & Dust Box 586L19 (regularly furnished)

**DOOR DETAIL**

TOLERANCES	
INCHES	(mm)
.005	(.127)
.015	(.381)

**RESPONSIBILITY**  
 DOOR AND FRAME MANUFACTURERS ARE RESPONSIBLE FOR PROVIDING ADEQUATE CONSTRUCTION OR REINFORCEMENTS FOR PROPER INSTALLATION OF HARDWARE SHOWN. ALL ARCHITECTURAL BUILDERS HARDWARE MUST BE INSTALLED ON PROPERLY REINFORCED DOORS AND FRAMES, REGARDLESS OF TYPE, MATERIAL, OR METHOD OF CONSTRUCTION.

**TL3700 Series Tubular Lock**  
 All Functions And Trim  
 Except Dummy Trim



www.corbinrusswin.com

SUPERSEDES	T31048-1	DO NOT SCALE DRAWING
TEMPLATE NUMBER	T31048-2	SHEET 1 of 1 DATE 1/23

Experience a safer and more open world

Copyright © 2016, 2023, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.