

# Notes:

1. Backset is measured from centerline of bevel which is centerpoint of door thickness.
2. Door prep with 2-3/4" (69.9) backset meets ANSI standards A115.2 for steel doors and A115.W2 for wood doors plus through bolt holes shown.
3. Dimensions given in inches and (mm).
4. 1-1/4" strike lip suits frame for 1-3/4" thick door. Lip will vary for other door thicknesses.
5. Door prep will vary for 3/4" (19) latch assembly. Refer to template T30528 for details.
6. (\*\*) Y [ [ 1/8" (3.2) ] ] Inside only. Wire clearance.

## BACKSET "A"


2-3/4 (69.9)	Regular
3-3/4 (95.3)	Optional
5 (127)	




CL33700 TCPAC Series

BEVEL  
1/8" in 2"  
(3.2) (50.8)

## SQUARE EDGE




## BEVELED EDGE



## CAUTION: DOOR AND FRAME MANUFACTURERS

When door gasketing or silencers are used, proper allowances must be made for strike location to maintain a common centerline with lock and door as shown so that bolt will freely enter strike.

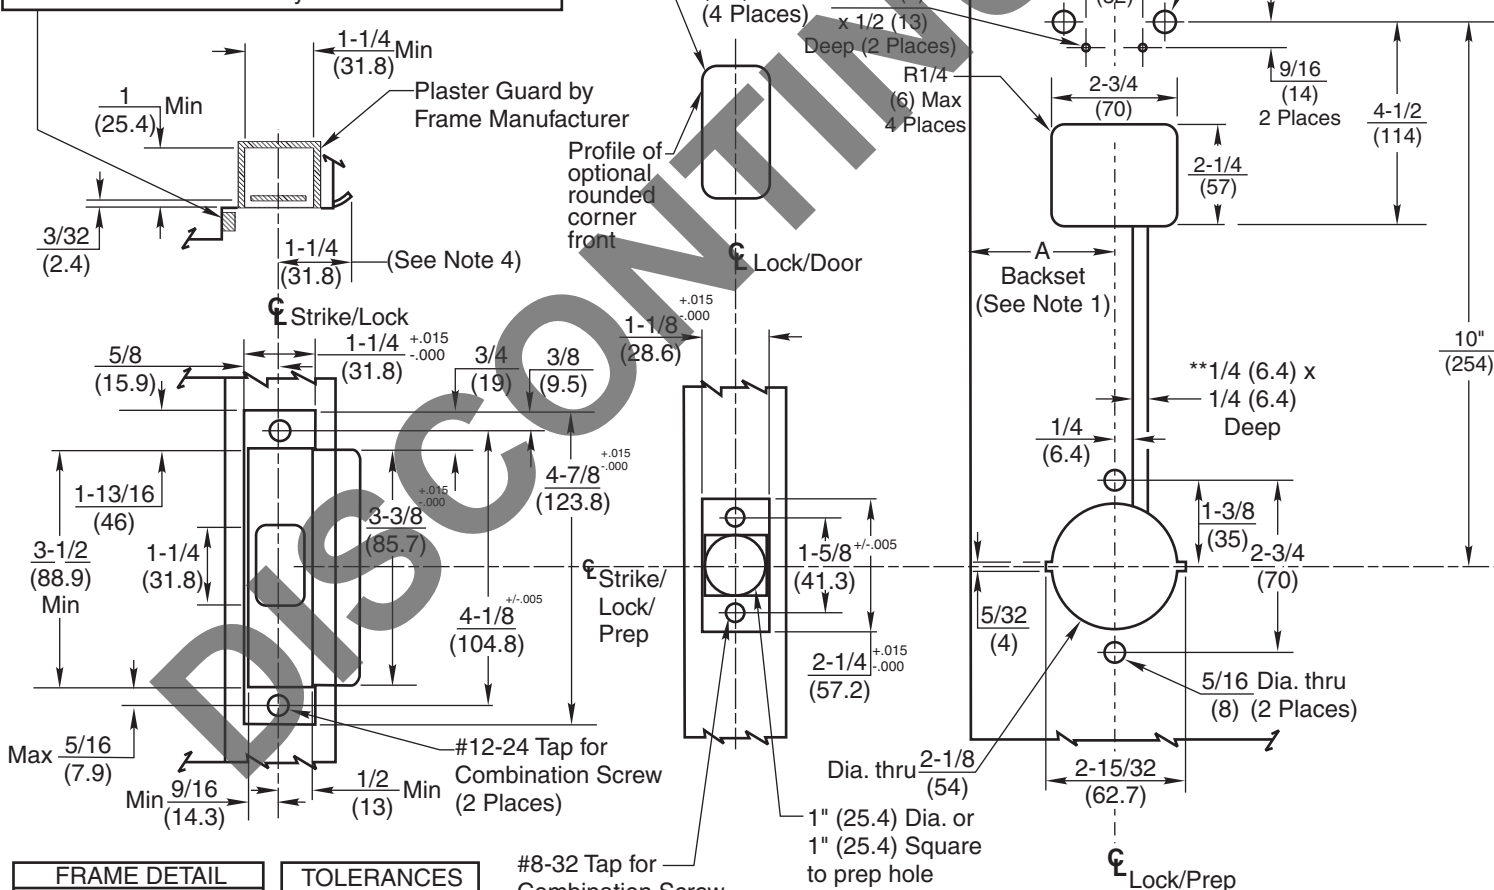

FRAME DETAIL
ANSI Strike 217L13 and Box 120F76 (Regularly Furnished)

TOLERANCES	
INCHES	(mm)
.005	(.127)
.015	(.381)

#8-32 Tap for Combination Screw (2 Places)

## DOOR DETAIL

4/14/08

## Access 700® TCPAC CL33700 Series Cylindrical Lever Lockset

Corbin  
Russwin®

ASSA ABLOY

www.corbinrusswin.com

SUPERSEDES

DO NOT SCALE DRAWING

TEMPLATE NUMBER

T31077

DATE

04/08