


⑨

Strike	Strike Box Depth (Minimum)	Template Cross Reference	
		Lock Series	Template
586L19	3/4 (19.1)	CL3100	T31193
		CLX3300	T31253
		CL3300	T30684
		CL33903 & CL33905	T30971
		CL3500	T31001
		CL3800 (2007+)	T31005
		CK4300	T31238
		CK4400	T30400
		HP3000	T31188
		TL3700	T31048

# CAUTION: DOOR AND FRAME MANUFACTURERS

When door gasketing or silencers are used, proper allowances must be made for strike location to maintain a common centerline with lock door as shown so that bolt will freely enter strike.

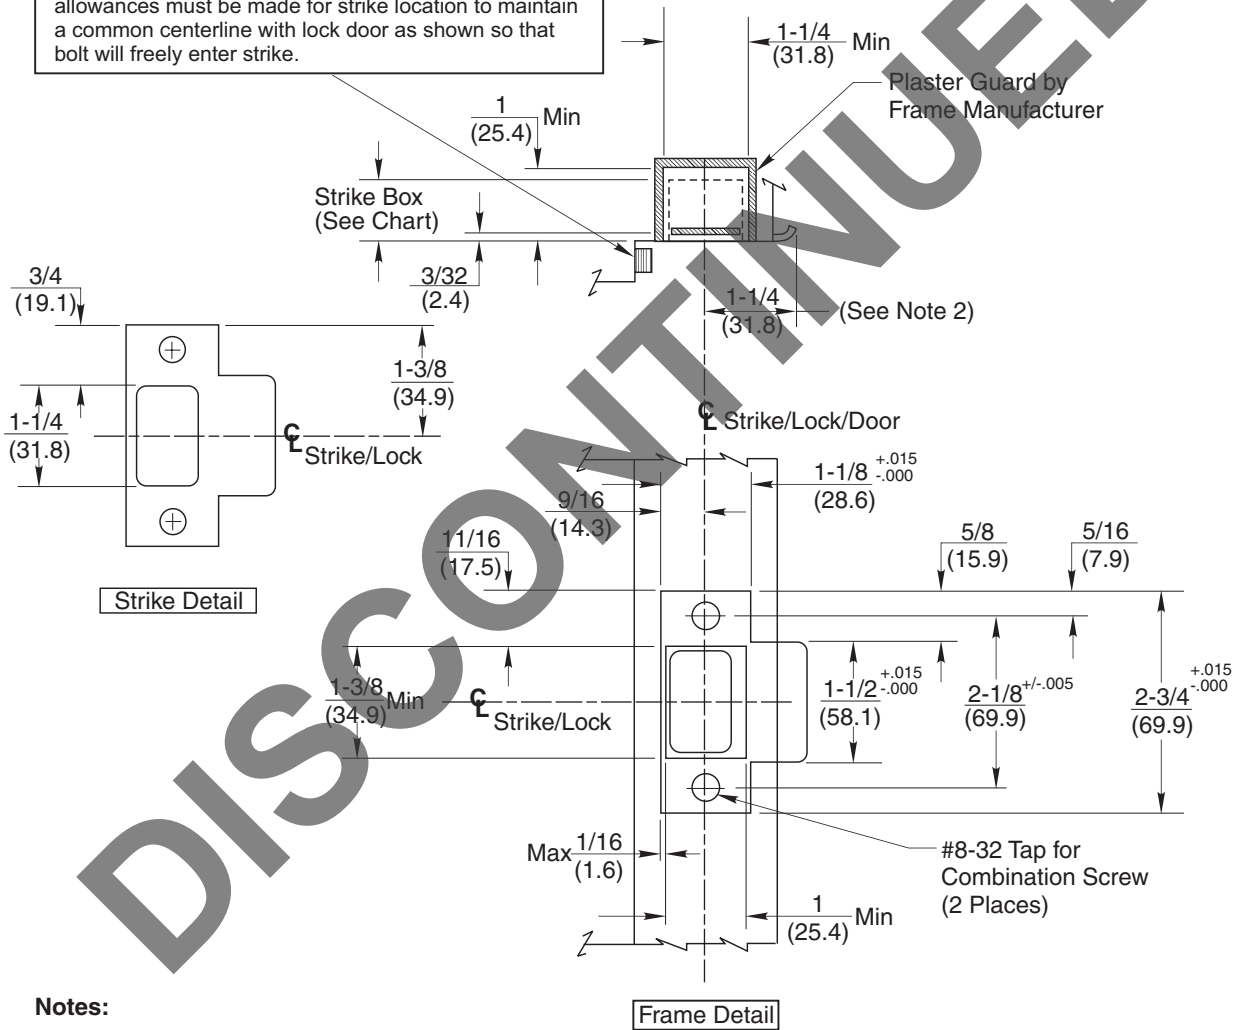

## Notes:

1. Dimensions given in inches and (mm).
2. 1-1/4" strike lip suits frame for 1-3/4" thick door. Lip will vary for other door thicknesses.

Tolerance Conversion	
Inches	(mm)
.005	(.127)
.015	(.381)

## RESPONSIBILITY

DOOR AND FRAME MANUFACTURERS ARE RESPONSIBLE FOR PROVIDING ADEQUATE CONSTRUCTION OR REINFORCEMENTS FOR PROPER INSTALLATION OF HARDWARE SHOWN. ALL ARCHITECTURAL BUILDERS HARDWARE MUST BE INSTALLED ON PROPERLY REINFORCED DOORS AND FRAMES, REGARDLESS OF TYPE, MATERIAL, OR METHOD OF CONSTRUCTION.

## SC Series Curved Lip Box Strike (See Chart)

**Corbin  
Russwin®**  
**ASSA ABLOY**

www.corbinrusswin.com

SUPERSEDES	T30476-8	DO NOT SCALE DRAWING
TEMPLATE NUMBER	T30476-9	SHEET 1 of 1
		DATE 03/21

Experience a safer and more open world

Copyright © 2012 - 2021, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.