



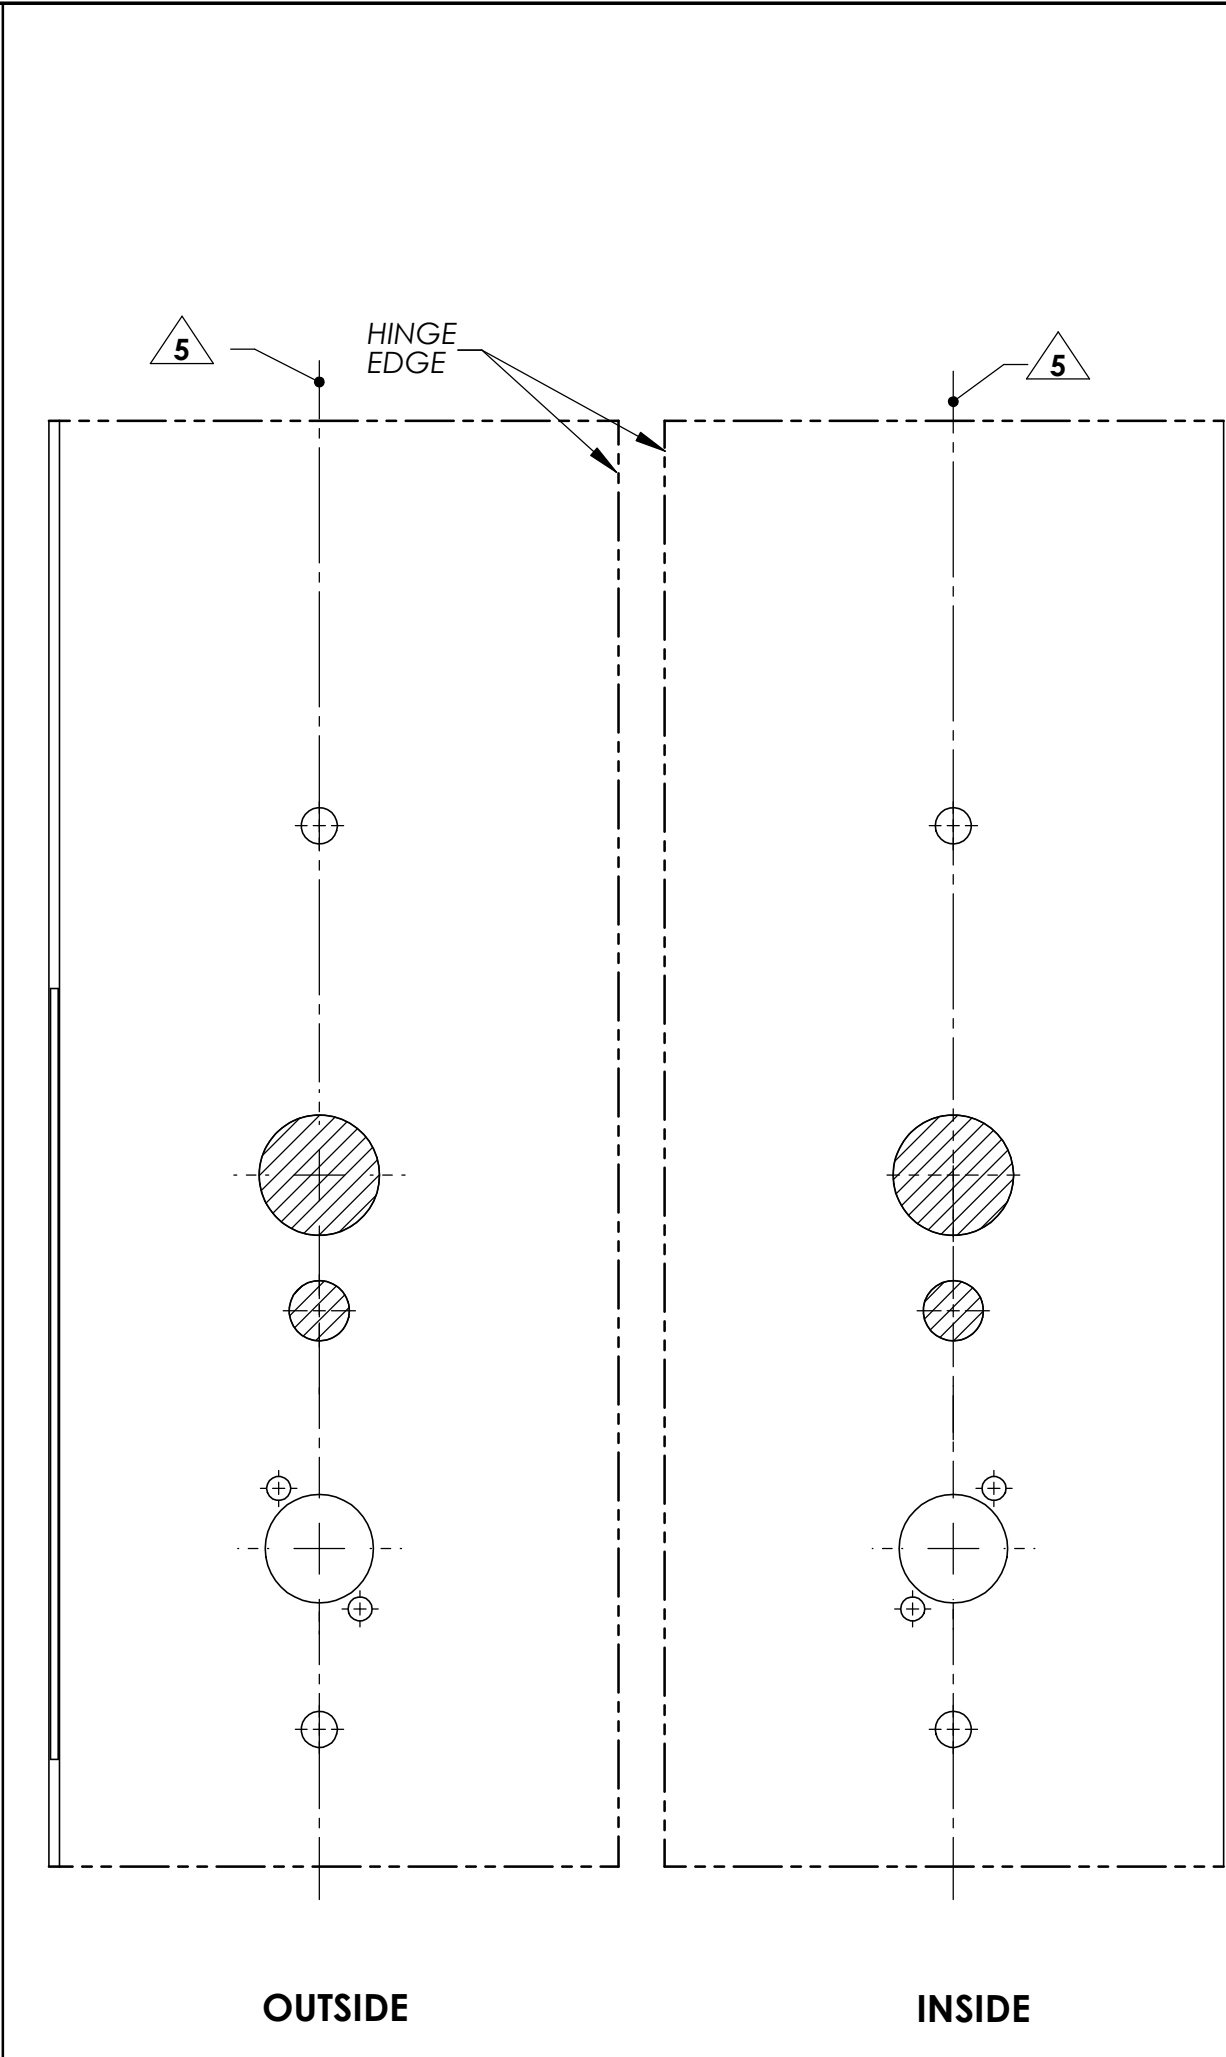

# WOOD DOOR

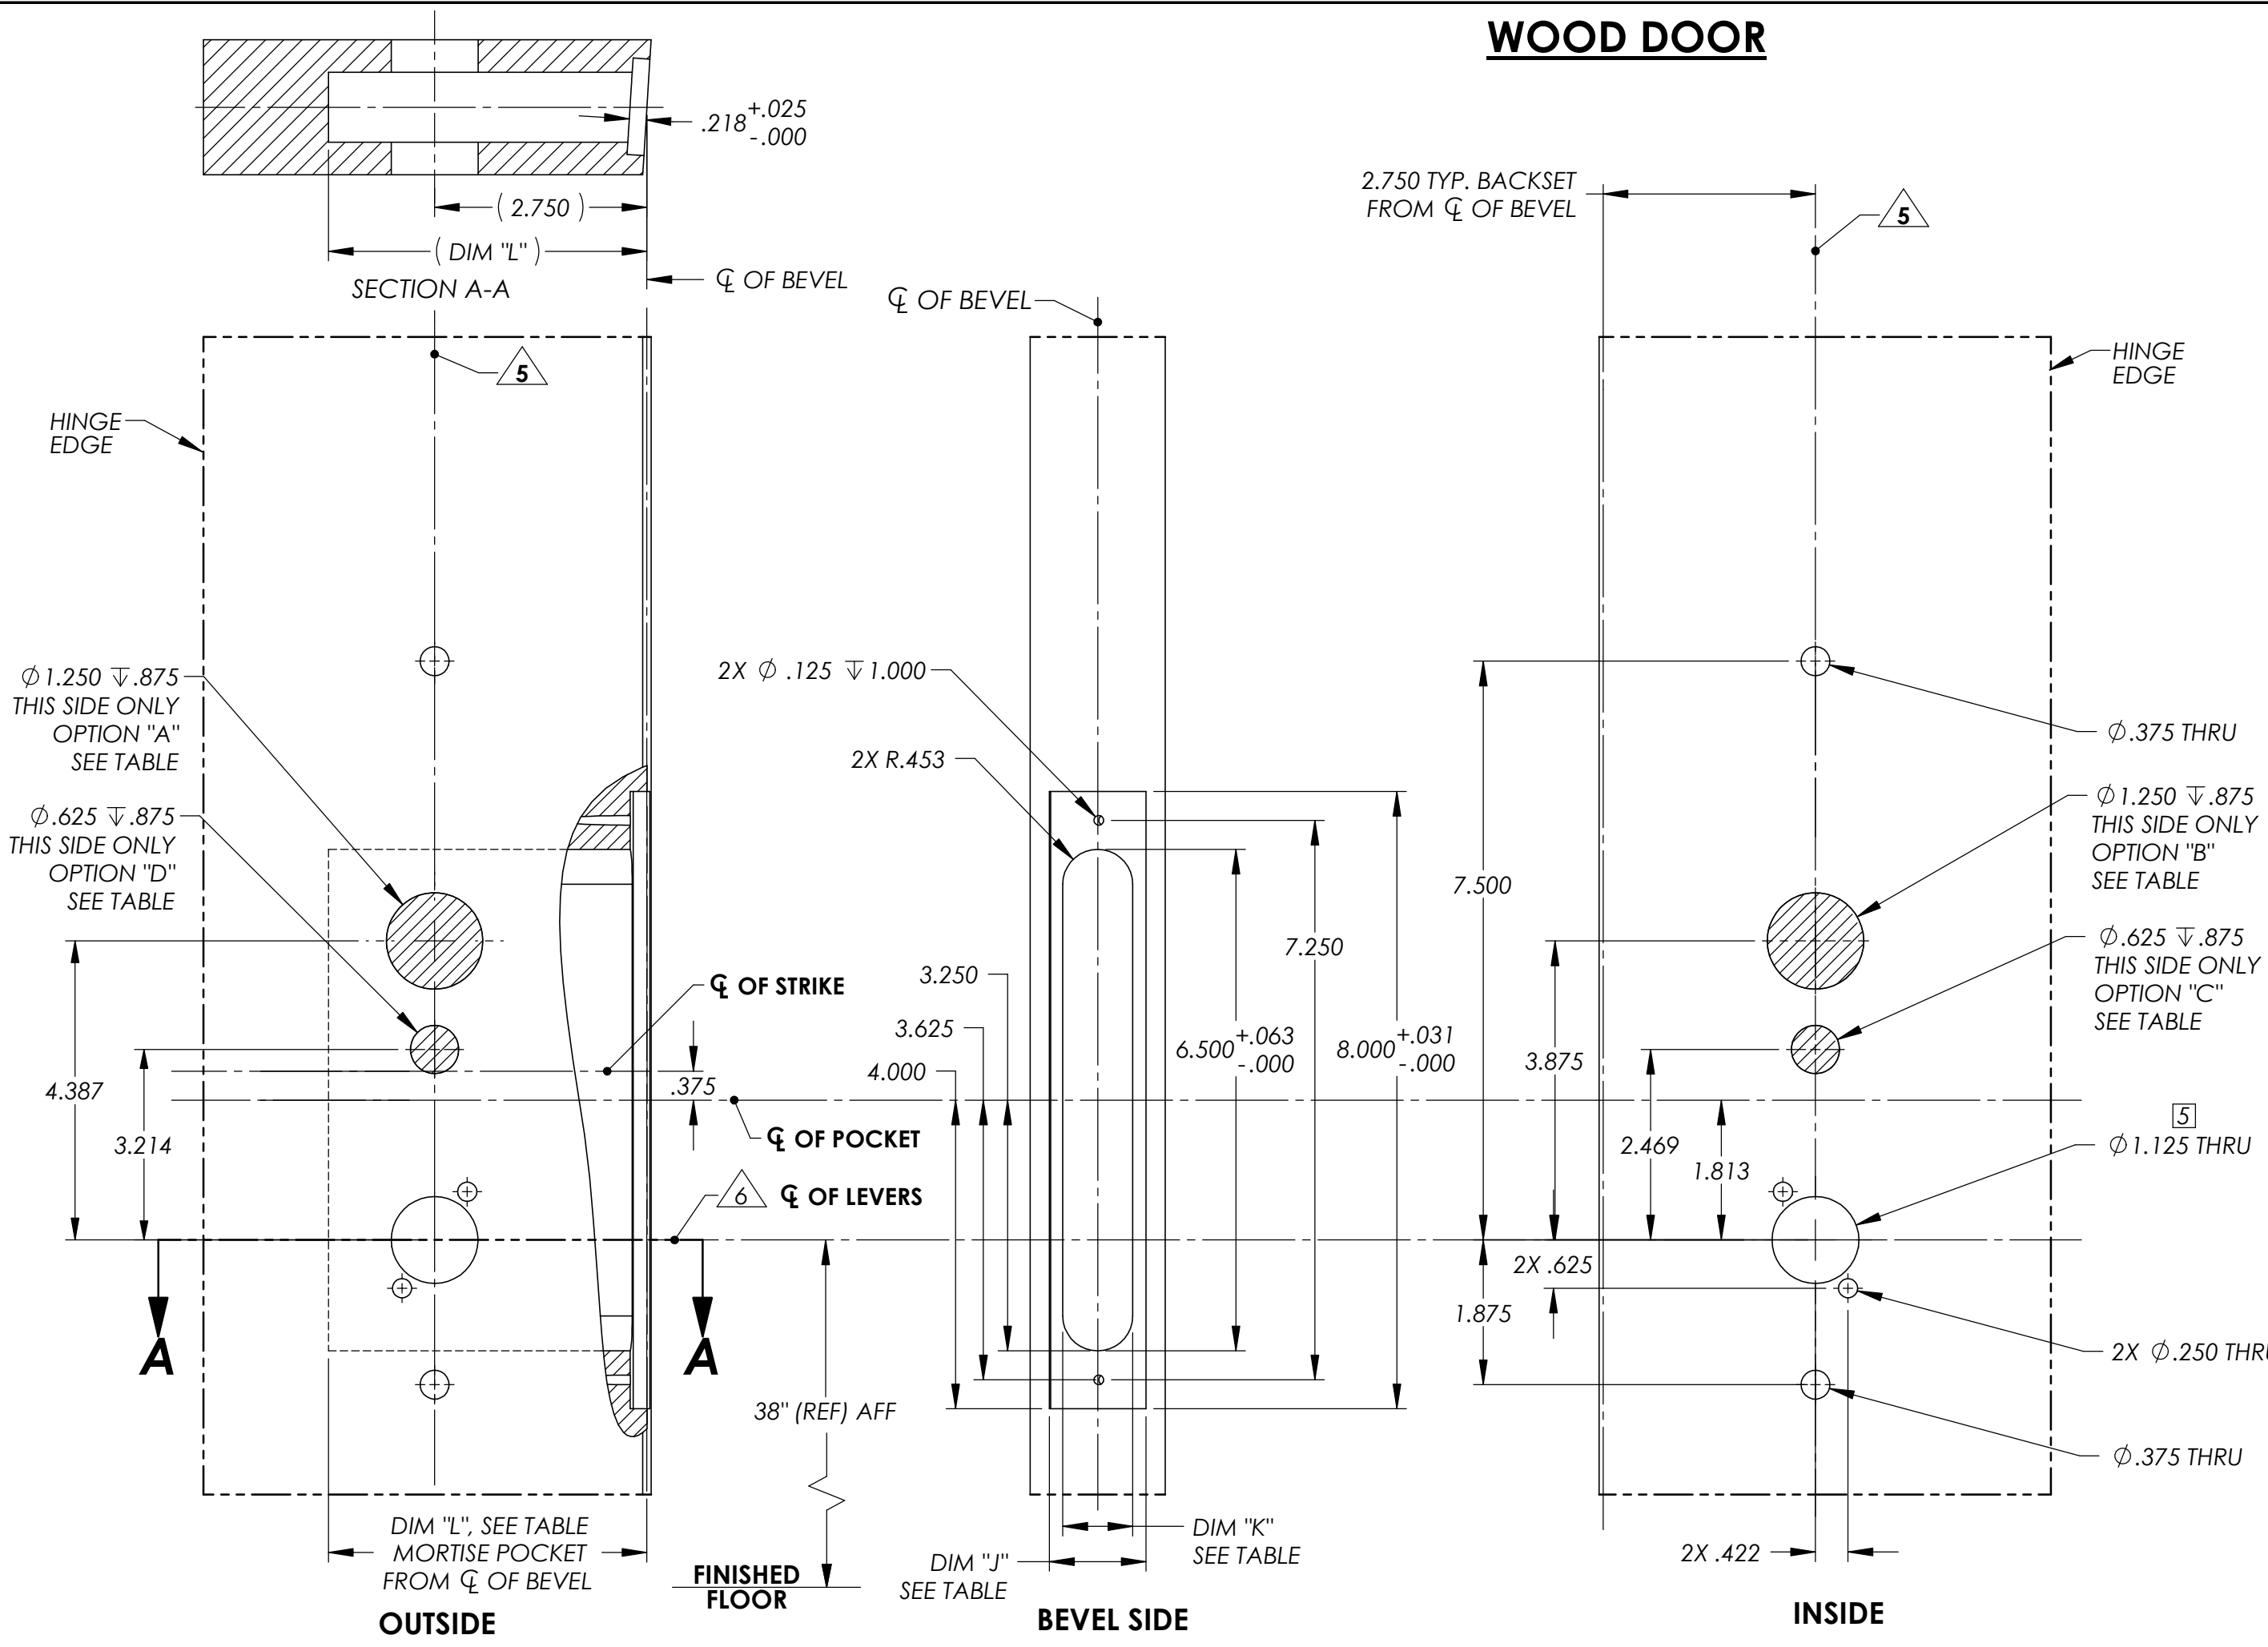


L.H. DOOR

R.H. DOOR


**NOTES:**

- DRAWING IS NOT TO SCALE.
- PREPARATION DETAILS ARE IN SUPPLEMENT TO ANSI/BHMA A156.115 AND/OR A115W.
- REFERENCE STRIKE TEMPLATE FOR DETAILS TO PREPARE FRAME.
- FOR ELECTROLYNX APPLICATIONS, REFER TO MCKINNEY TRANSFER DEVICE CATALOG.
- VERTICAL CENTERLINE IS REFERENCED FROM THE CENTERLINE OF THE BEVEL. (INDUSTRY STANDARD BEVEL IS 1/8 INCH IN 2 INCHES.)
- CONSULT THE AUTHORITY HAVING JURISDICTION (AHJ) TO VERIFY THE RECOMMENDED MOUNTING HEIGHT ABOVE THE FINISHED FLOOR (AFF).
- LIMITATIONS IN THE DOOR CONSTRUCTION PROCESS MAY REQUIRE SOME HOLES TO BE FIELD-LOCATED USING THE PHYSICAL PART AS A TEMPLATE.
- STANDARD TOLERANCE OF ± .015 APPLIES TO ALL DOOR PREPARATION REQUIREMENTS, UNLESS OTHERWISE SPECIFIED.
- DOOR REINFORCEMENT IS RECOMMENDED TO IMPROVE (SURFACE MOUNTED) FASTENER HOLDING POWER AND CRUSH RESISTANCE (WHEN THRU-BOLTING IS EMPLOYED). CONSTRUCTION TECHNIQUES SHOULD REFLECT INDUSTRY BEST PRACTICES (I.E. WDMA, SDI) AND AUTHORIZED METHODS WHERE LABEL SERVICE (I.E. UL, W-H) IS IN EFFECT.
- WIRE RACEWAY AREAS SHOULD BE FREE OF OBSTRUCTIONS & SHARP EDGES TO PROTECT WIRES FROM CUTS & ABRASIONS.
- CAREFULLY NOTE WHICH FEATURES ARE OPTIONAL, (WHETHER THE FEATURE APPLIES TO BOTH SIDES OF THE DOOR AND/OR IF A DEPTH APPLIES.)
- MAXIMUM PRODUCT DIMENSIONS ARE SHOWN FOR THE PURPOSE OF VERIFYING FITMENT WITH DOOR FRAME STOPS, DOOR STILE SIZE & LIGHT/LOUVER KITS.
- IF OPTIONAL LEVERS OR ROSES ARE USED REFERENCE THE RELATED PRODUCT DIMENSIONS TO VERIFY THE FITMENT REQUIREMENTS.

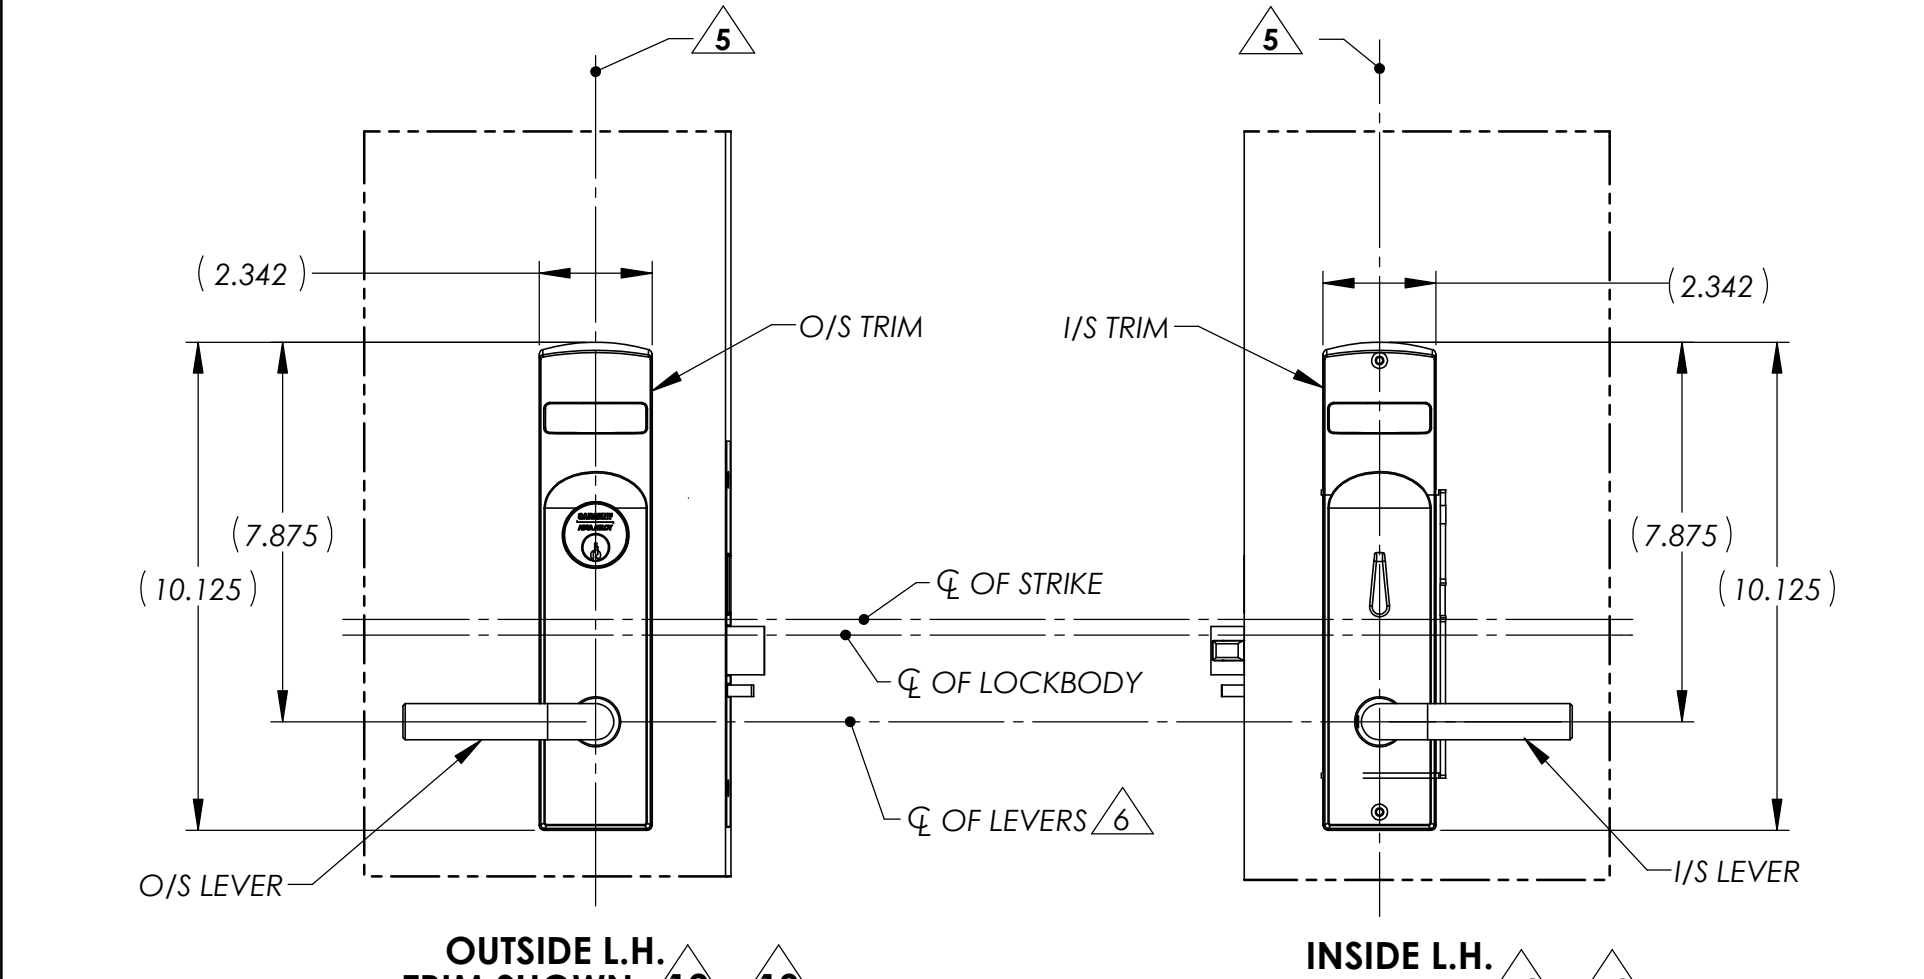

OPTIONS TABLE				
LOCK FUNCTION	"A" O/S CYLINDER	"B" I/S CYLINDER	"C" I/S TURN	"D" O/S TURN
05, 24, 25, 28, 43, 45, 47, 50, 51, 56, 57, 58, 67, 281	X		X	
30, 37	X			
26, 29, 38, 39, 40, 41, 46, 52	X	X		
65, 66, 68			X	X
12, 285			X	
INDICATOR OPTION (ADD HOLES)				
V * 0 (INDICATOR OUTSIDE)				X
V 0 * (INDICATOR INSIDE)			X	
V ** (INDICATOR BOTH SIDES)			X	X
* INDICATOR WINDOW OPTION CODE				

LOCK POCKET OPTIONS TABLE			
PREFIXES & FUNCTIONS	DIM "J" LOCK FRONT	DIM "K" POCKET WIDTH	DIM "L" POCKET DEPTH
STANDARD	1.250 ± 0.015	1.125	4.563
1- PREFIX	1.062 ± 0.015	1.000	4.125
74- PREFIX	1.250 ± 0.015	1.125	4.563
RX- PREFIX OR 281/285 FUNCTIONS	1.250 ± 0.015	1.250	4.563

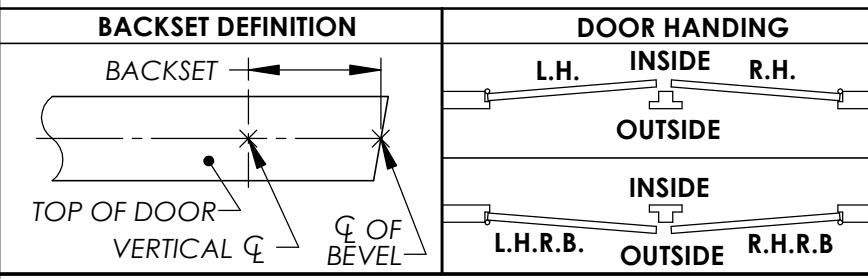

**SARGENT ASSA BLOY**

DOOR MANUFACTURERS TEMPLATE:  
VN1 ESCUTCHEON INDICATOR TRIM  
WOOD DOOR  
8200 MORTISE LOCK

APR 2024

4746 7

SHEET 2 OF 2