

SARGENT®
ASSA ABLOY

PRODUCT CATALOG

5300 Series Alarmed Exit Device



Experience a safer
and more open world

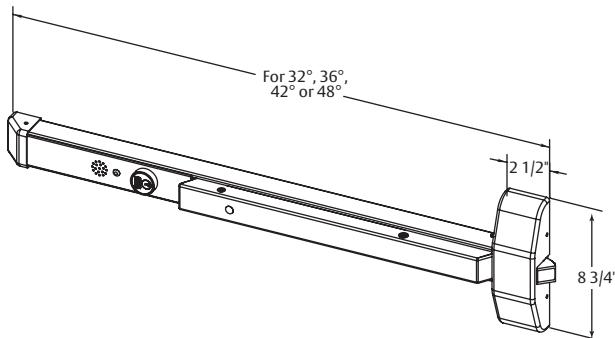
Contents

Features	3
Functions	4
Architectural Specifications, Options, How To Order & Finishes	5

 **WARNING**

This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov.

Features







SARGENT's 5300 Series alarmed exit devices are designed for areas requiring a standalone alarm on outward swinging doors. An integrated alarm in the push rail discourages the unauthorized use of emergency exits doors, with the alarm sounding immediately upon exit. The 5300 Series is ideal for rear exterior doors, door leading to a rooftop, or anywhere security is a concern.

FEATURES

- Microprocessor based alarm board
- When armed, alarm sounds immediately upon rail depression
- All exit devices have tamper resistant latching (Guarded Latch)
- Battery powered – 9VDC
- 103 Db @ 8 ft pulsating horn
- Flashing red LED provides visible violation indication, reset by key only
- Low battery alert
- Automatic re-arming option
- Supplied with a #41 (1-1/8") with standard off set cam
- UL Listed and cUL Listed
- UL Listed to Canadian Safety Standards
- Rail Monitoring & Guarded Latch are standard internal features
- Minimum Door Widths:
- E-32" only; F-36"-34"; J-42"-37";
G-48"-43"
- See McKinney's Transfer Device Solutions Catalog for QC Hinge and cable requirements (if hard wired)
- Complies to ANSI/BHMA A156.3 and A117.1
- Painted finishes: EN, EB, and ERD
- Plated finishes: BSP and 32D
- Touch bar assembly and cover (5300 & 12-5300) are rolled steel, and the chassis is nonferrous alloy
- 1-3/4" thick standard with a 4-1/2" minimum stile width. Furnished with wood and machine screws
- Through-bolts and mortise nuts are available to order
- The 5300 Series come standard with the dogging feature. The 12-5300 comes standard with the less dogging (LD) option

Functions

Functions marked by  symbol are available as Fire Exit Hardware.

	10 Exit only. No Outside operation.	04 Key retracts latchbolt. Activating key will cause unit to enter 15 second delay mode.	13 Key locks or unlocks lever. Activating lever will cause unit to enter 15 second delay mode.	15 Similar to 13 with no outside cylinder, lever always operative. Rotating lever will sound alarm.
Functions available for 5300 & 12-5300	 	 	 	 
Trims available for both 5300 & 12-5300	 88-DL   53 D GTB	 88-KL   53 K HTB	 88-CL 	 88-LL 

To cover a 161 cutout (Pull) 53 D GTB, (Cover plate) 53 E GTB or (Pull with cylinder cutout) 53 K HTB may be used. This trim is furnished with 3 mortise nuts and screws for 1-3/4" doors.

To order specify trim x finish

Example: 53 K HTB x EN



53 K HTB



53 D GTB



53 E GTB

Specifications, Architectural Options, How to Order & Finishes

SUGGESTED ARCHITECTURAL SPECIFICATIONS

1. All alarms to be 9 volt battery powered
2. Devices to be equipped with piercing audible alarm signal
3. Forcing latchbolt will sound alarm
4. All devices to possess solid state electronics
5. All devices to be non-handed or reversible
6. Removing cover will sound alarm

HOW TO ORDER 5300 SERIES ALARMS (TRIM SOLD SEPARATELY)

36- Options	5300 Series	13 Function	EN Finish
Listed on this page	53	04	EN, EB, ERD, 32D, BSP
		10	
		13	
		15	


Option	Descriptions and Availability
10-	Signature System
11-	SARGENT XC Key System
12-	UL Fire Label Exit Devices
21-	Construction Keying Conventional, XC and Signature Series
36-	6 Lobe security head screws
37-	Spanner head screws
82-	Keso Security Cylinder
94-	Automatic Re-Arm
BR-	Bump Resistant Cylinder (Available with Conventional & XC Cylinders Only)
SC-	Schlage C Keyway cylinder, 0-bitted
SE-	Schlage E Keyway cylinder, 0-bitted
TB-	Through Bolts
- All Alarmed Exit Hardware includes cylinders where applicable.	

HOW TO ORDER TRIM FOR 5300 SERIES EXIT DEVICES (ALARM SOLD SEPARATELY)

Example:

11- Options	88-C-LL	26D
Available Trim & Function Designation	Available Finishes	
Listed on this page	Lever & Rose Trim	Lever & Rose Finishes
	88-K-LL (04 Function)	26D, BSP
	88-D-LL (10 Function)	
	Trims & Pulls	Finishes
	53 K HTB (04 Function)	EN
	53 E GTB (10 Function) Exit Only	EB
	53 D GTB (10 Function) Pull	ERD

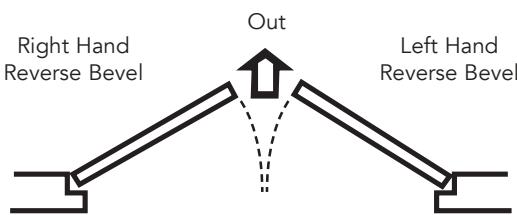HANDING CHART



OPTION DESCRIPTIONS

Automatic Rearming (94-Option)

The 5300 and 12-5300 equipped with spring loaded on/off switch.

- Switch returns to "on" position after removal of key
- Alarm always on
- Can be added in the field (Order part 32-7097)

FINISHES

Symbol	Description
EN	Polyester Powder coated to match US28
EB	Polyester Powder coated to match US10B
ERD	Polyester Powder coated – Red
32D	Dull Stainless Steel (Rail Assemblies)
BSP	Black Suede Powder Coat

Experience a safer
and more open world

1-800-727-5477 • www.sargentlock.com

5

The ASSA ABLOY Group is the global leader in access solutions. Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window hardware, mechanical and smart locks, access control and service.

SARGENT®

ASSA ABLOY

SARGENT Manufacturing Company
100 Sargent Drive
New Haven, CT 06511 USA
800-727-5477
www.sargentlock.com

Founded in the early 1800s, SARGENT® is a market leader in locksets, cylinders, door closers, exit devices, electro-mechanical products and access control systems for new construction, renovation, and replacement applications. The company's customer base includes commercial construction, institutional, and industrial markets.

Copyright © 2019-2025, SARGENT Manufacturing Company. All rights reserved. Reproduction in whole or in part without the express written permission of SARGENT Manufacturing Company is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.

90878 09/25