


Opening	Dim. "A" inch (mm)	Dim. "B" inch (mm)
To 120°	9-5/8 (244)	3-3/4 (95)
*Over 120°	7-1/8 (181)	1-1/4 (32)

*Door openings to 180°, conditions permitting.

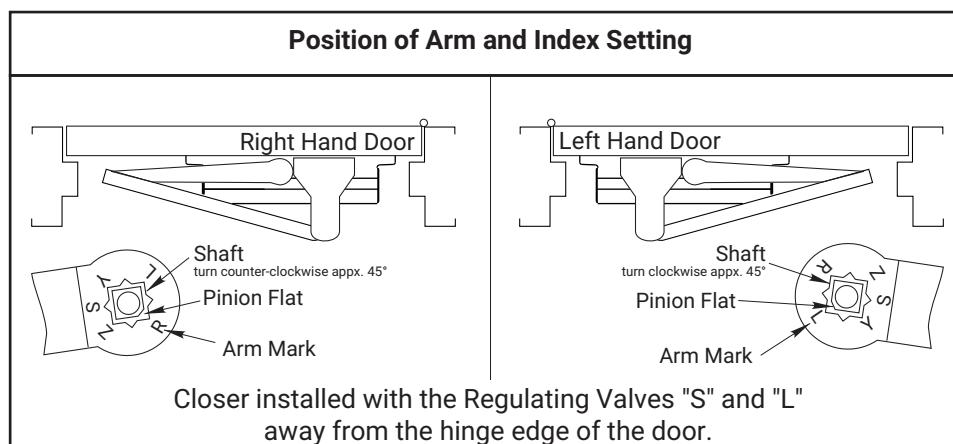

- Do not scale drawing.
- Left hand door shown.
- Dimensions are in inches (mm).
- Minimum butt hinge width for this template is 5" (127mm).
- Hollow metal doors require channel or box type reinforcement when thru bolt mount is specified.
- Minimum thickness recommended for reinforcements in hollow metal doors and frames: .1046 (2.66mm) unless otherwise noted.
- Hold Open arms are not permitted to be used on fire doors.

3000 Series Door Closer
Models PR3301, PR3501, PR3311, and PR3511 With or Without 3158 Drop Plate
Parallel Rigid Non-Hold Open or Hold Open Arm Application With 293L Bracket for Flush Transoms

ACCENTRA
ASSA ABLOY

TEMPLATE NUMBER 7303-0252	REV 4	DATE 05/24
------------------------------	----------	---------------