


Opening	Dimension "A"	
	inches	mm
To 100°	7-5/8	194
100° to 120°	6-5/8	168
120° to 150°	4-5/8	117
150° to 180°	4-1/8	105

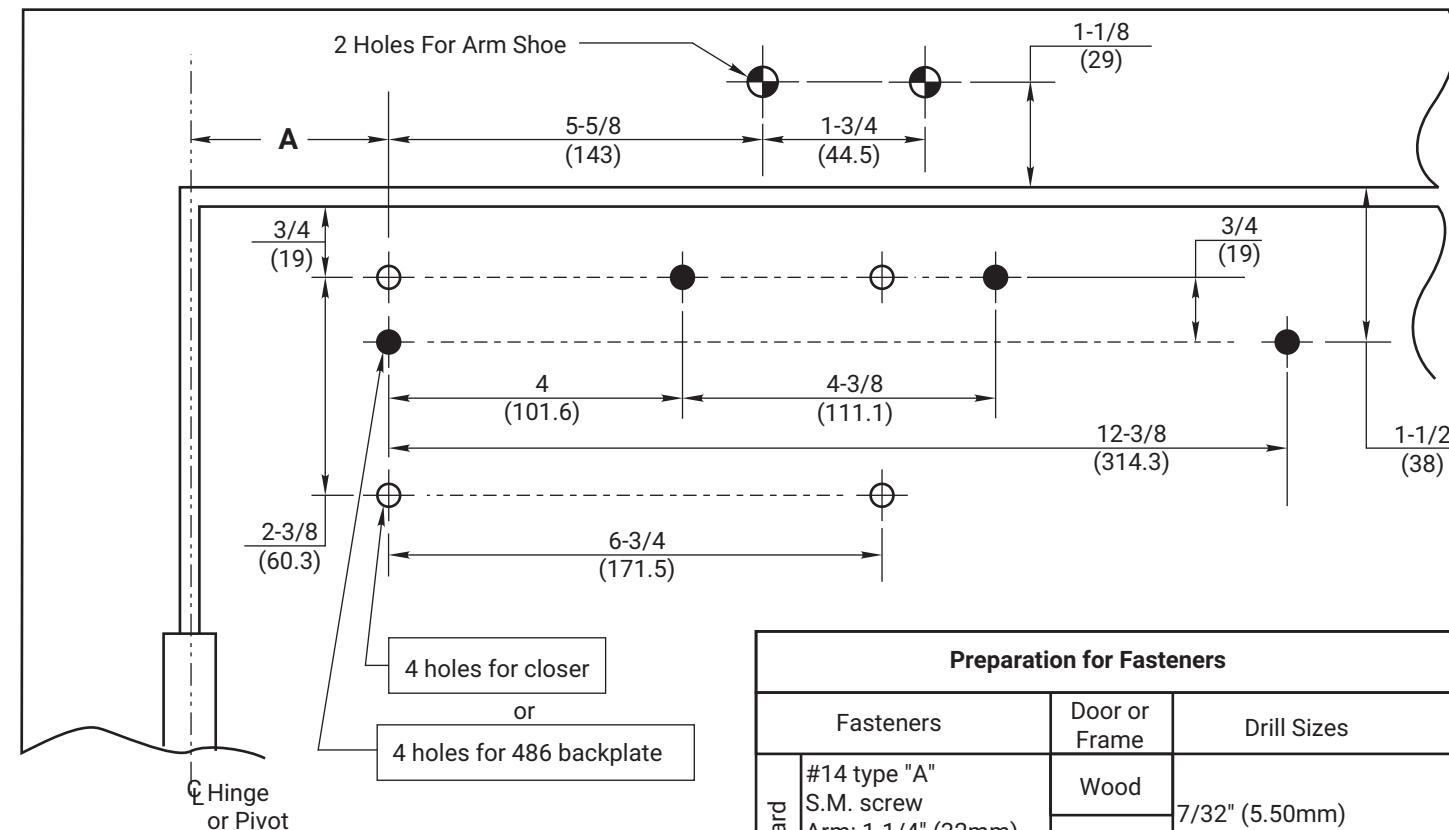

CAUTION: Door swing may be limited by door, frame, wall or hardware conditions (including closer projection).

NOTES:

1. Do not scale drawing.
2. Right hand door shown.
3. All dimensions given in inches (mm).
4. Hollow-metal doors require channel or box-type reinforcement when thru-bolt mount is specified.
5. Minimum thickness recommended for reinforcements in hollow-metal doors and frames: .1046" (2.66mm) unless otherwise noted.

Preparation for Fasteners			
	Fasteners	Door or Frame	Drill Sizes
Standard	#14 type "A" S.M. screw Arm: 1-1/4" (32mm) Closer: 2-3/4 (70mm)	Wood	7/32" (5.50mm)
	1/4-20 machine-screw	Aluminum	
Optional	Sex-nuts and bolts	Hollow-Metal	9/32" (7.00mm) through; 3/8" (9.50mm) on door or transom-face opposite to closer
	Through-bolts and grommet-nuts	Aluminum or Wood	3/8" (9.500mm) through
		All	9/32" (7.00mm) through; 3/8" (9.50mm) dia. x 3/8" (9.500mm) deep on door or transom-face opposite to closer

4400 Series Door Closer
Model 4410 With or Without 486 Backplate
Regular Arm Application, Hold Open

ACCENTRA
ASSA ABLOY

TEMPLATE NUMBER	7344-0105	REV	DATE
	3	05/24	