

Do not scale drawing.

Left hand door shown.

Dimensions are in inches (mm).

CAUTION: Door swing may be limited by door, frame, wall, or hardware conditions.

Hollow-metal doors require channel or box type reinforcement when thru-bolt mount is specified.


Minimum thickness recommended for reinforcements in hollow-metal doors and frames: .1046" (2.66mm) unless otherwise noted.

Frame Rabbet

Frame Soffit

Hinge or Pivot

Opening	Dim. "A"		Dim. "B"	
	inches	mm	inches	mm
To 100°	8-3/4	222	9-1/4	235
101° to 130°	7-1/4	184	7-3/4	197
131° to 150°	6-1/4	159	6-3/4	171
151° to 180°	5-1/4	133	5-3/4	146

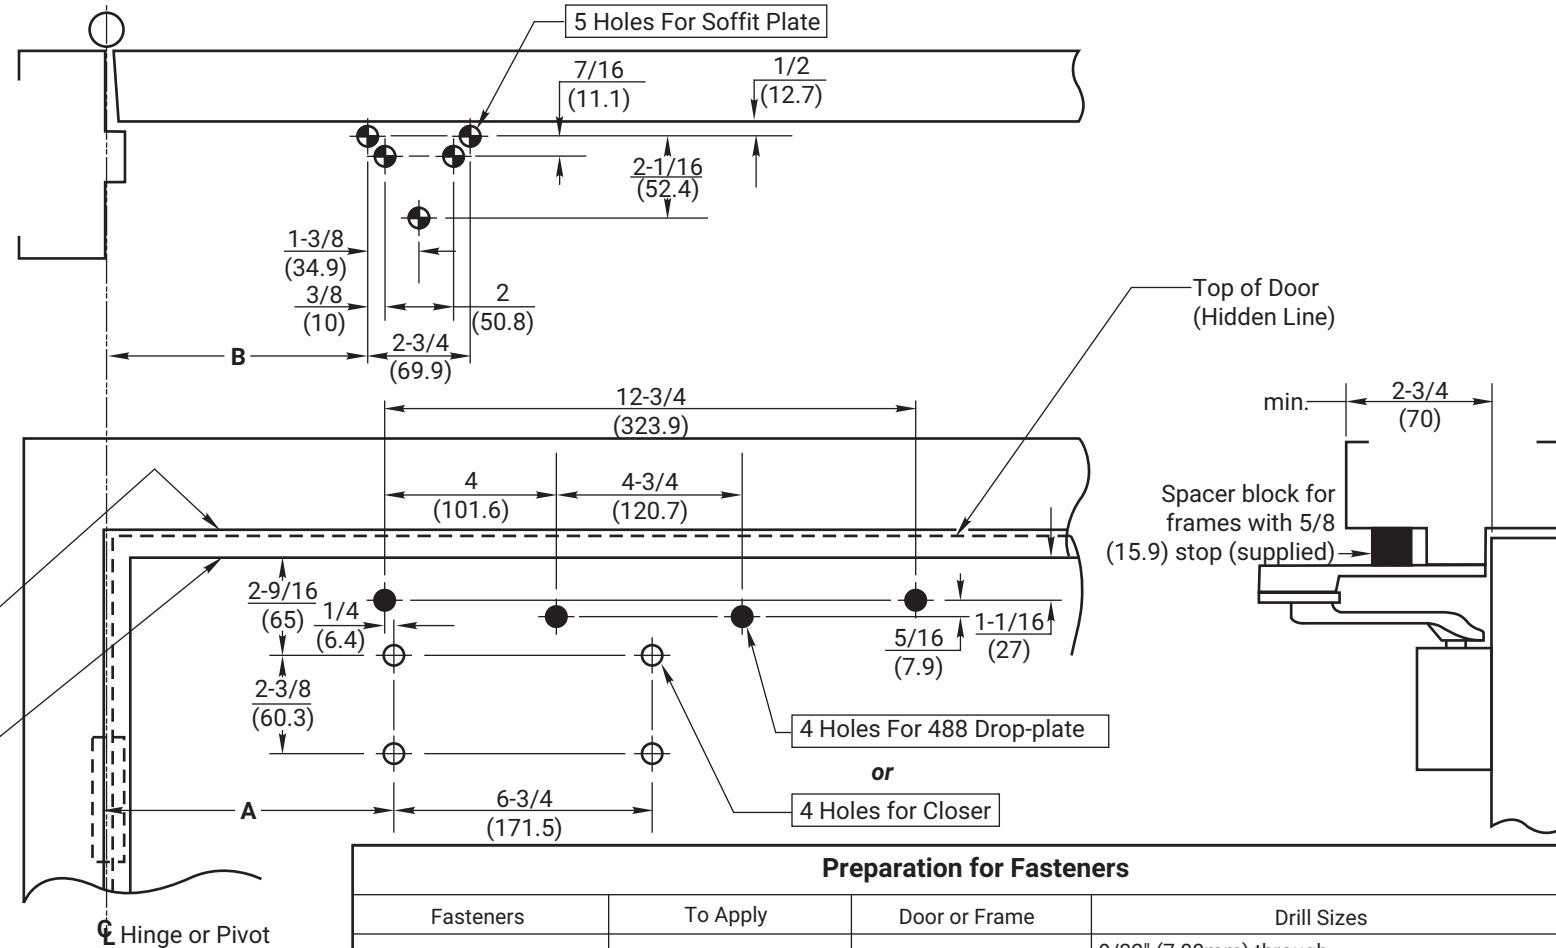

4400 Series Door Closer
Models PR4400 or PR4410 With or Without 488 Drop Plate
Parallel Rigid Arm Application, Non-Hold Open or Hold Open

ACCENTRA
ASSA ABLOY

TEMPLATE NUMBER
7344-0251

REV 3
DATE 05/24