
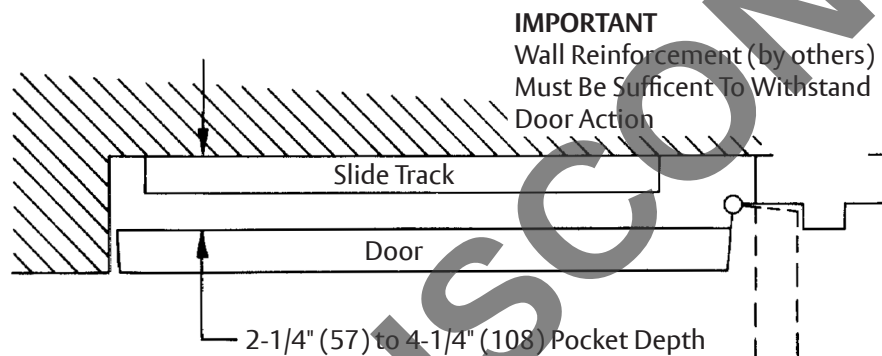
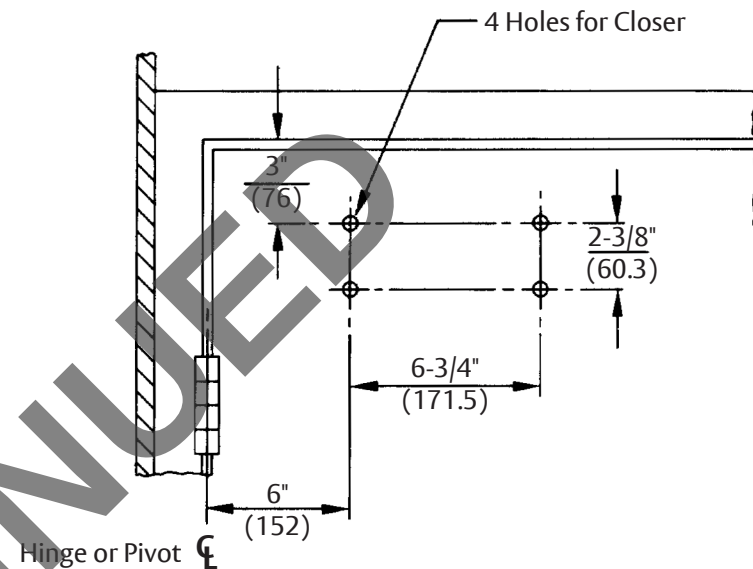


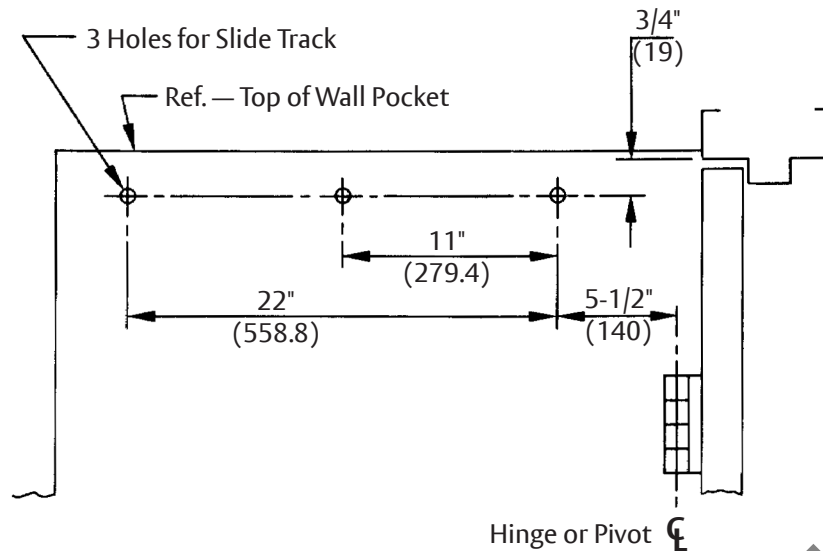

IMPORTANT
Wall Reinforcement (by others)
Must Be Sufficient To Withstand
Door Action

Closer Sizing Chart	
Door Width	Closer
Up to 42" - (1.07 mm.)	406STP
43" to 48" - (1.09 mm to 1.22 mm)	406EP-STP

Preparation for Fasteners		
Fasteners	Door or Frame	Drill
#14 type "A" Sheet Metal Screw	Wood	7/32" (5.5 mm.)
1/4-20 machine screw	Metal	#7 (.201" dia.) or 5.10 mm. drill: tap: 1/4-20
SNB (optional)	Hollow Metal	9/32" (7.00 mm.) thru; 3/8" (9.50 mm.) door face opposite to closer
	Aluminum or Wood	3/8" (9.50 mm.) thru
TBGN (optional)	All	9/32" (7.00 mm.) thru; 3/8" (9.50 mm.) dia. x 3/8" (10 mm.) deep, door face opposite to closer

Notes:

1. Do not scale drawing
2. Right hand door shown.
3. Dimensions shown in inches (mm.).

Experience a safer
and more open world

Copyright © 2003, 2024, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.

406STP or 406EP-STP Series Closer
Slide Track Closer for 90° Wall Pocket Installation
For Pocket Depths 2-1/4" to 4-1/4" (57mm to 108mm)

Template Number:
80-7344-0505-010
Sheet: 1 of 1
Date: 01/24

ASSA ABLOY

1-800-438-1951
www.assaabloy.com