


Opening	Dimension "A"	
	inches	mm
To 100°	7-5/8	194
100° to 120°	6-5/8	168
120° to 150°	4-5/8	117
150° to 180°	4-1/8	105

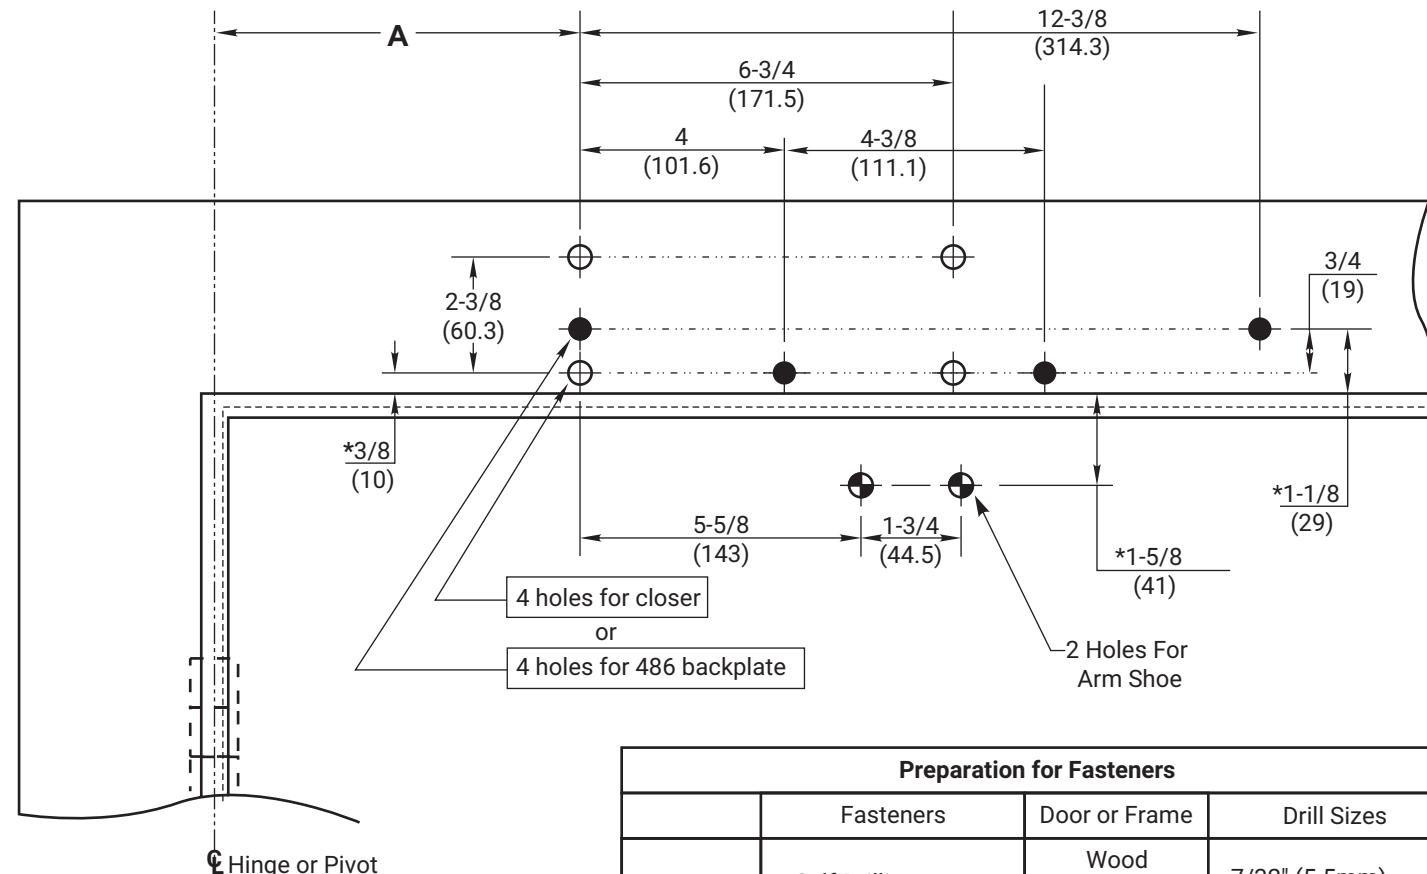

**NOTES::**

- Do not scale drawing.
- Left hand door shown.
- Dimensions are in inches (mm).
- Hollow metal doors require channel or box type reinforcement when thru bolt mount is specified.
- Sex bolts may be required for wood or plastic faced fire door mounting.
- Minimum thickness recommended for reinforcements in hollow metal doors are frames: .1046" (2.66mm) unless other- wise noted.

**CAUTION:** Door swing may be limited by door, frame, wall or hardware conditions.

\* Always use frame or transom rabbet as reference plane, not bottom of stop.

**4400 Series Door Closer**  
**Models (TJ)4400, (TJL)4400, and (TJS)4400 With or Without 486 Back Plate**  
**Top Jamb Application, Non-Hold Open**

**ACCENTRA**  
**ASSA ABLOY**

TEMPLATE NUMBER	7344-0151	REV	DATE
	3	05/24	