

**FOR NOTES & FRAME PREP  
SEE SHEET 2**

**DOOR SPECIFICATION**

Door Thickness: 1-3/4"  
(45mm) Min.

Door Construction: Wood or composite door with fire or panic rating as required. Door may require metal channel edge which may alter backset dimensions. Consult door manufacturers listings.


**Exit Device Ratings:**

6160, 6165, 7160, 7165  
Panic Exit Doors up to 4'x8'

6160F, 7160F, Fire Exit  
Doors up to 4'x8', Rated up  
to 3 hr.

6160-10, 6165-10, 7160-10,  
7165-10 Panic Exit Doors up  
to 4' x 10'

6160F90-10, 7160F90-10,  
Fire Exit Doors up to 4'x10',  
Rated up to 1-1/2 hr.

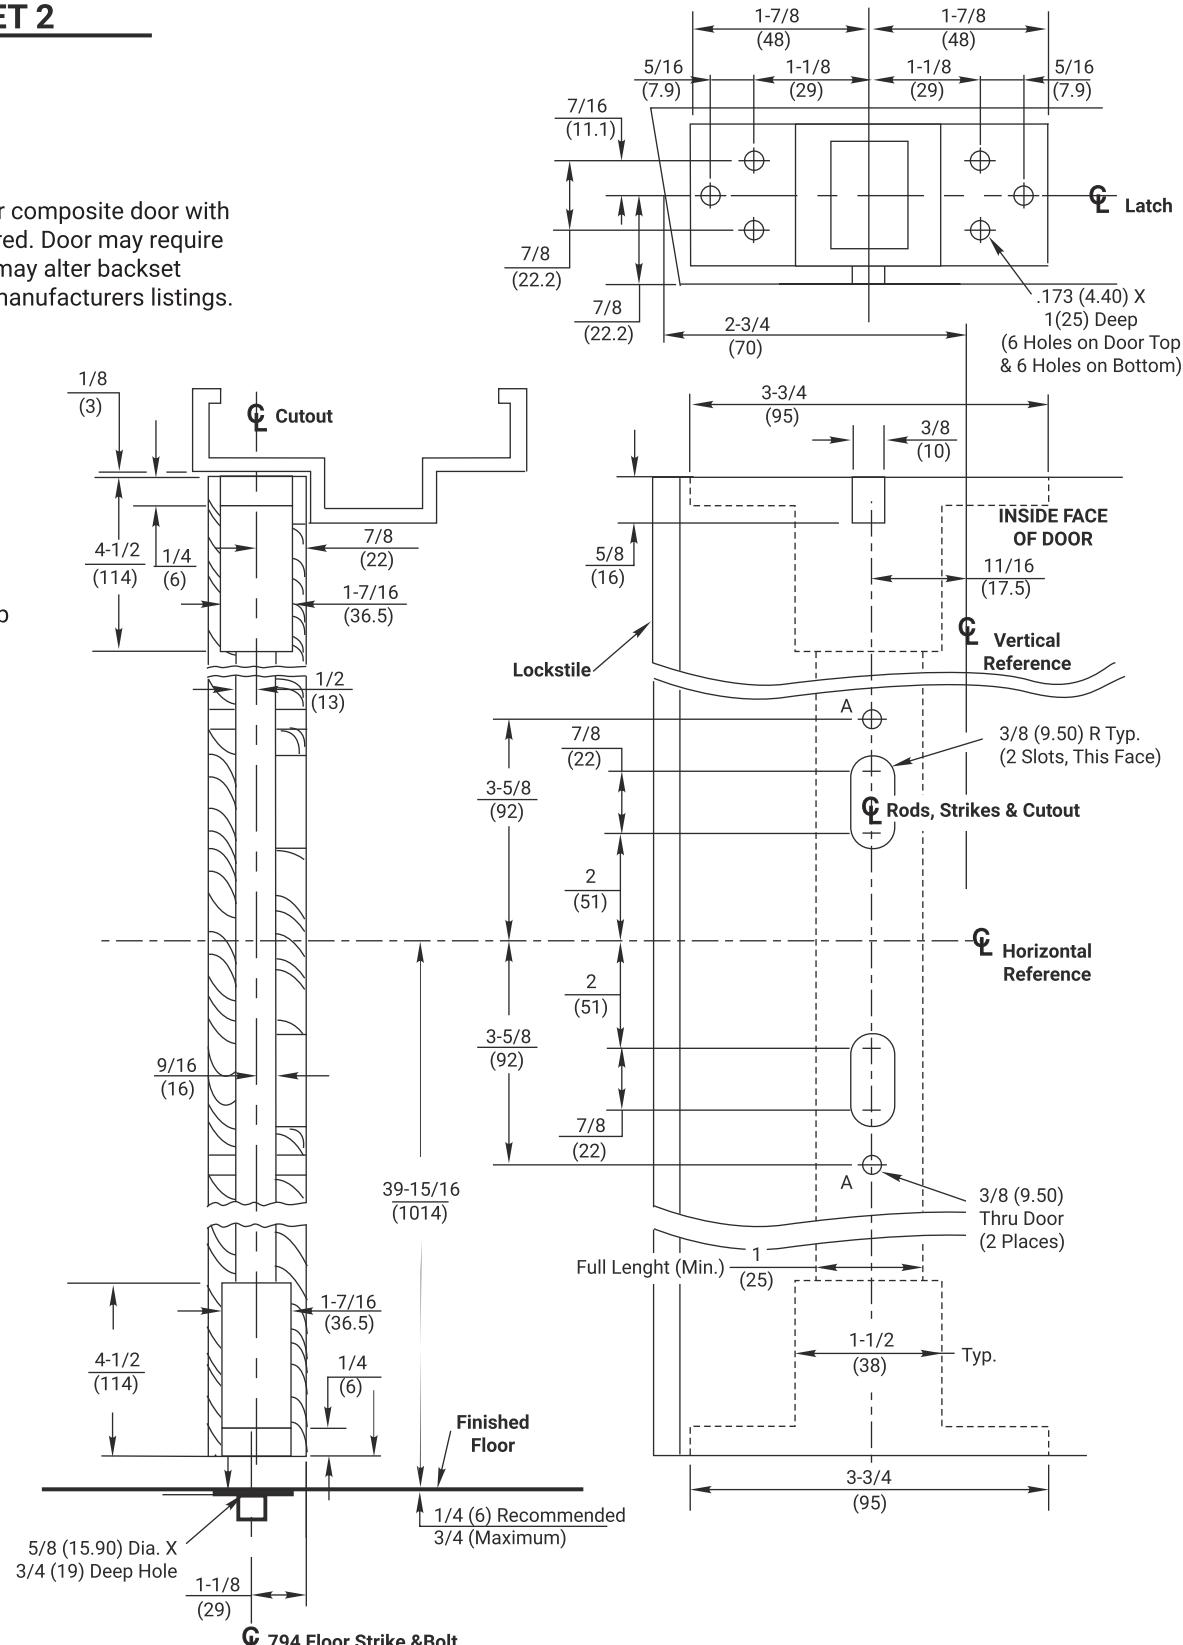

**RESPONSIBILITY**  
DOOR AND FRAME MANUFACTURERS ARE  
RESPONSIBLE FOR PROVIDING ADEQUATE  
CONSTRUCTION OR REINFORCEMENTS FOR  
PROPER INSTALLATION OF HARDWARE SHOWN.  
ALL ARCHITECTURAL BUILDERS HARDWARE MUST  
BE INSTALLED ON PROPERLY REINFORCED  
DOORS AND FRAMES, REGARDLESS OF TYPE,  
MATERIAL, OR METHOD OF CONSTRUCTION.

**6160(F90)(-10), 7160(F90)(-10), 6165(-10) &  
7165(-10) Series 1-800-438-1951**  
**Concealed Vertical Rod Exit Devices**  
Application for Wood Door & Metal Frame;  
761 Top Strike & 790 Floor Strike  
1-855-557-5078 Ext. 2  
[www.accentra-assaabloy.com](http://www.accentra-assaabloy.com)

**ACCENTRA®**

**ASSA ABLOY**

Experience a safer  
and more open world

Copyright © 2015, 2024, 2025, ASSA ABLOY ACCENTRA™ Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.

SUPERSEDES	9/25	DO NOT SCALE DRAWING
TEMPLATE NUMBER	7470-1060	SHEET 1 of 2 DATE 10/25