
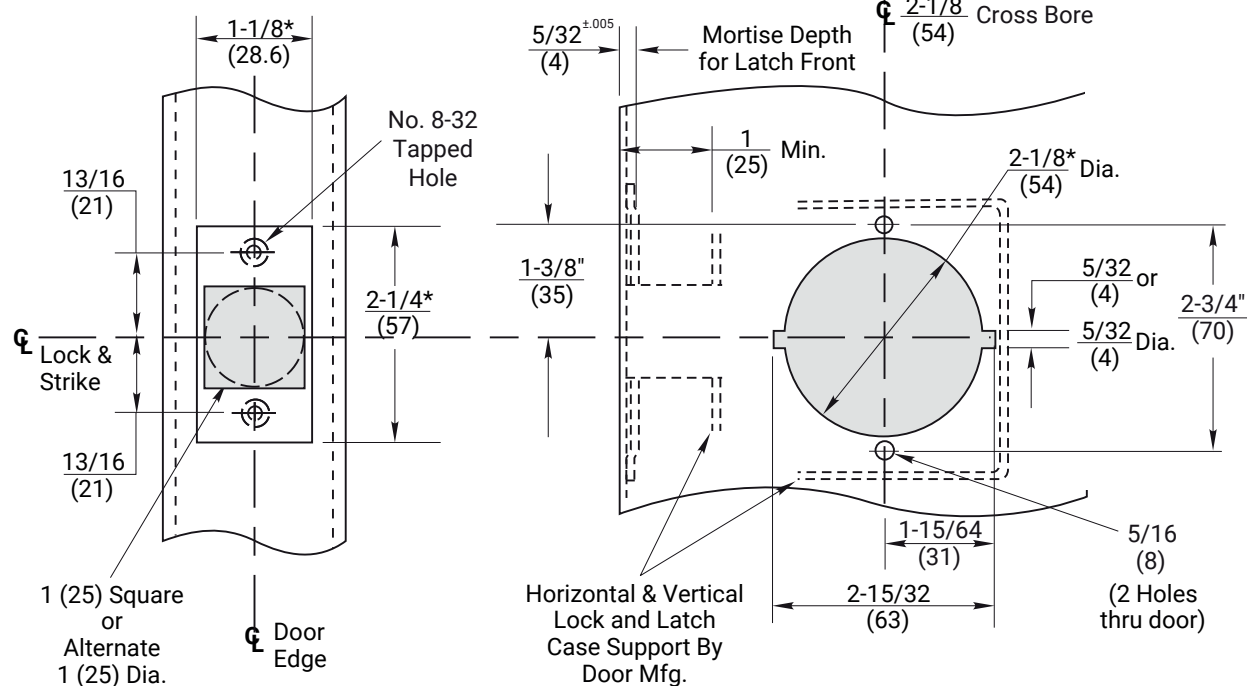


5300LN SERIES Lever Locks

Backset	Latch No.	Link No.
$\frac{2-3/4}{(70)}$	380AN, 380BN	-
$\frac{3-3/4}{(95)}$	3380AN, 3380BN	-
$\frac{5}{(127)}$	380AN, 380BN	381AN
$\frac{6}{(152)}$	3380AN, 3380BN	381AN

Notes:

1. When 4-7/8" (123.8) Strike is specified, refer to No. 497 Strike, Template No. 7102-0003.
2. When T-Strike is specified, refer to No. 371 Strike, Template 7102-0005.
3. Dimensions marked with * have tolerances of +.015, -0.000.
4. All dimensions given in inches (mm).
5. Std. Locks adjustable for 1-3/8 (35) to 1-3/4" (44) door thicknesses. Special order locks adjustable for 2" (51) to 2-1/4" (57) door thicknesses.
6. For universal or square edge doors use latchbolts with flat front (i.e. F380AN, F3380AN, etc.)

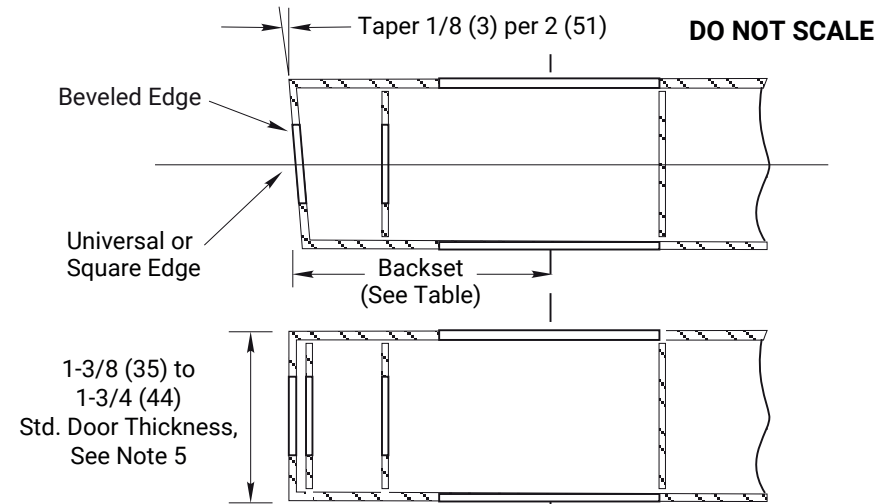

Experience a safer
and more open world

Copyright © 2008, 2023, 2024, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.

**5300LN Series Lever Handle Cylindrical Locks -
1-1/8" Wide Front
H.M. Door Preparation (See ANSI/BHMA A156.115)
2-3/4" and Optional Backsets**

1-855-557-5078 Ext. 2 www.accentra-assaabloy.com

**Template Number:
7150-0066**

Date: 06/24

Sheet: 1 of 1

ACCENTRA
ASSA ABLOY