


Notes:

1. When 4-7/8" (123.8) Strike is specified, refer to No. 497 Strike, Template No. 7102-0003.
2. When T- Strike is specified, refer to No. 371 Strike, Template 7102-0005.
3. Dimensions marked with * have tolerances of +.015, -.000
4. All dimensions given in inches (mm).

| RL SERIES Locks | | |
|-----------------|-----------|-------------|
| Backset | Latch No. | Front Dim. |
| 2-3/8 (60) | RLP38 | 1" (25) |
| 2-3/4 (70) | RLP34 | 1-1/8" (29) |

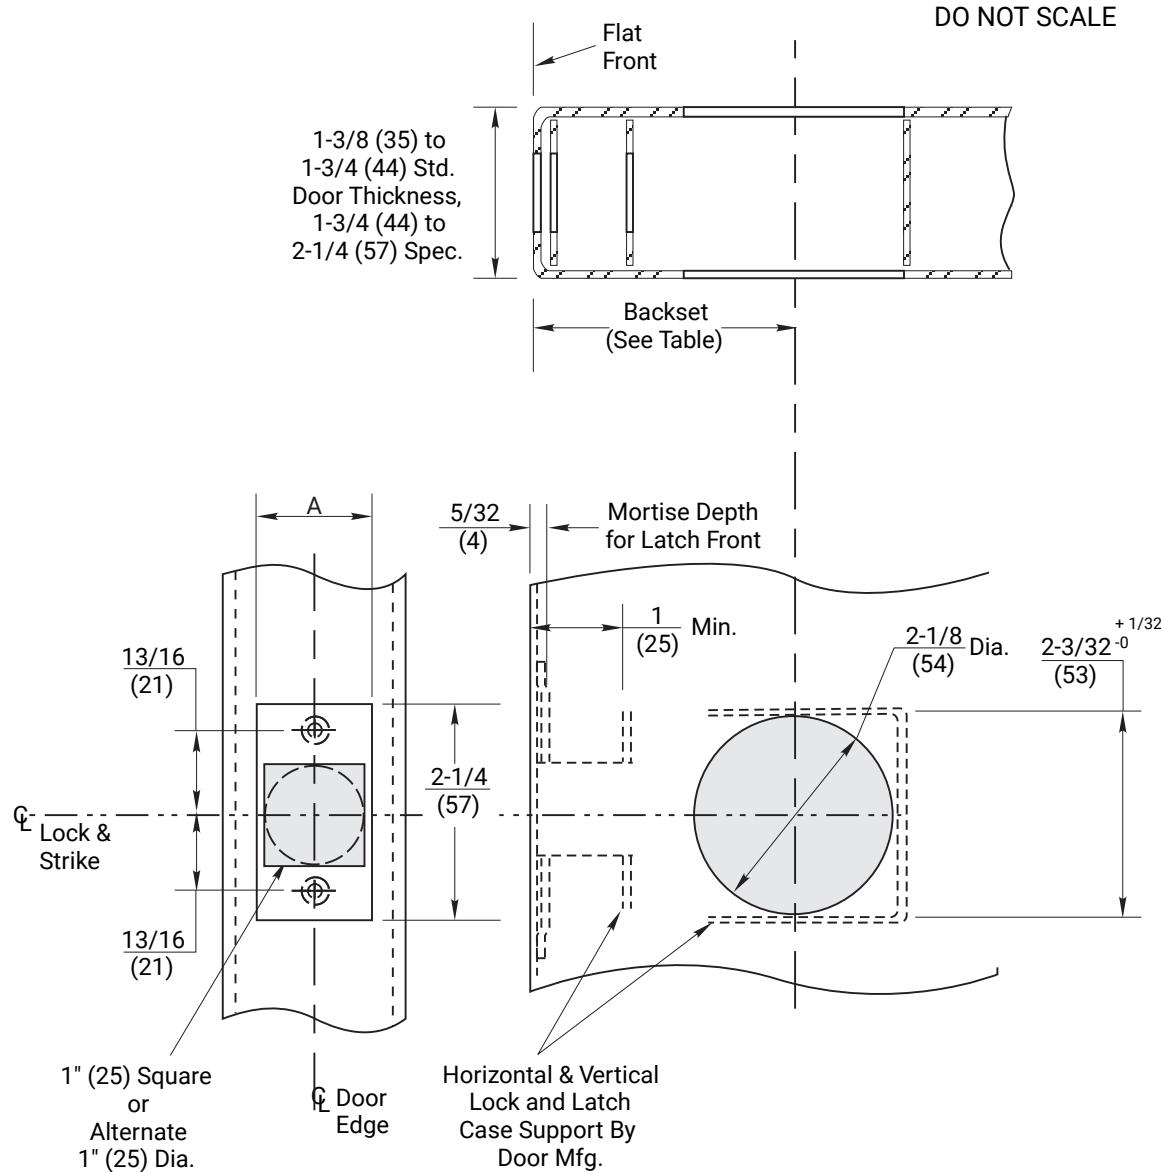

RESPONSIBILITY
DOOR AND FRAME MANUFACTURERS ARE
RESPONSIBLE FOR PROVIDING ADEQUATE
CONSTRUCTION OR REINFORCEMENTS FOR
PROPER INSTALLATION OF HARDWARE SHOWN.
ALL ARCHITECTURAL BUILDERS HARDWARE MUST
BE INSTALLED ON PROPERLY REINFORCED
DOORS AND FRAMES, REGARDLESS OF TYPE,
MATERIAL, OR METHOD OF CONSTRUCTION.

RL Series Tubular Locks
1" and 1-1/8" Wide Flat Front H.M. Door Preparation
(See ANSI/BHMA A156.115)
2-3/4 and 2-3/8" Backset
1-855-557-5078 Ext. 2
www.accentra-assaabloy.com

ACCENTRA
ASSA ABLOY

Experience a safer
and more open world

Copyright © 2022, 2023, 2024, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.

| | | |
|-----------------|-----------|----------------------|
| SUPERSEDES | 01/24 | DO NOT SCALE DRAWING |
| TEMPLATE NUMBER | 7150-0100 | SHEET 1 of 1 |