



NOTES:

1. Do not scale.
2. All dimensions given in inches (mm).
3. For lock and strike preparation, see templates 7086-8003 (H.M.) and 7086-8004 (Wood Door, H.M. Frame).
4. Cylinder hole ONLY for: NTM610/612/613, NTM615/617/618, NTM620/622/623, NTM625/627/628
5. Thumbturn holes ONLY for: NTM615/617/618, NTM625/627/628, NTM635/637/638, NTM645/647/648
6. Door and Frame Provider is responsible for locating this product on the door to ensure it meets ADA height requirements.
7. Wire raceway required for hard power option. Raceway to connect Ø3/4" (19 mm) hole to hinge edge power source.

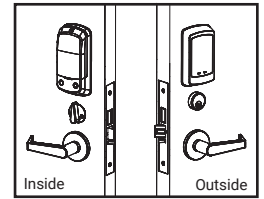

(*) Escutcheon & Trim Positions and Sizes

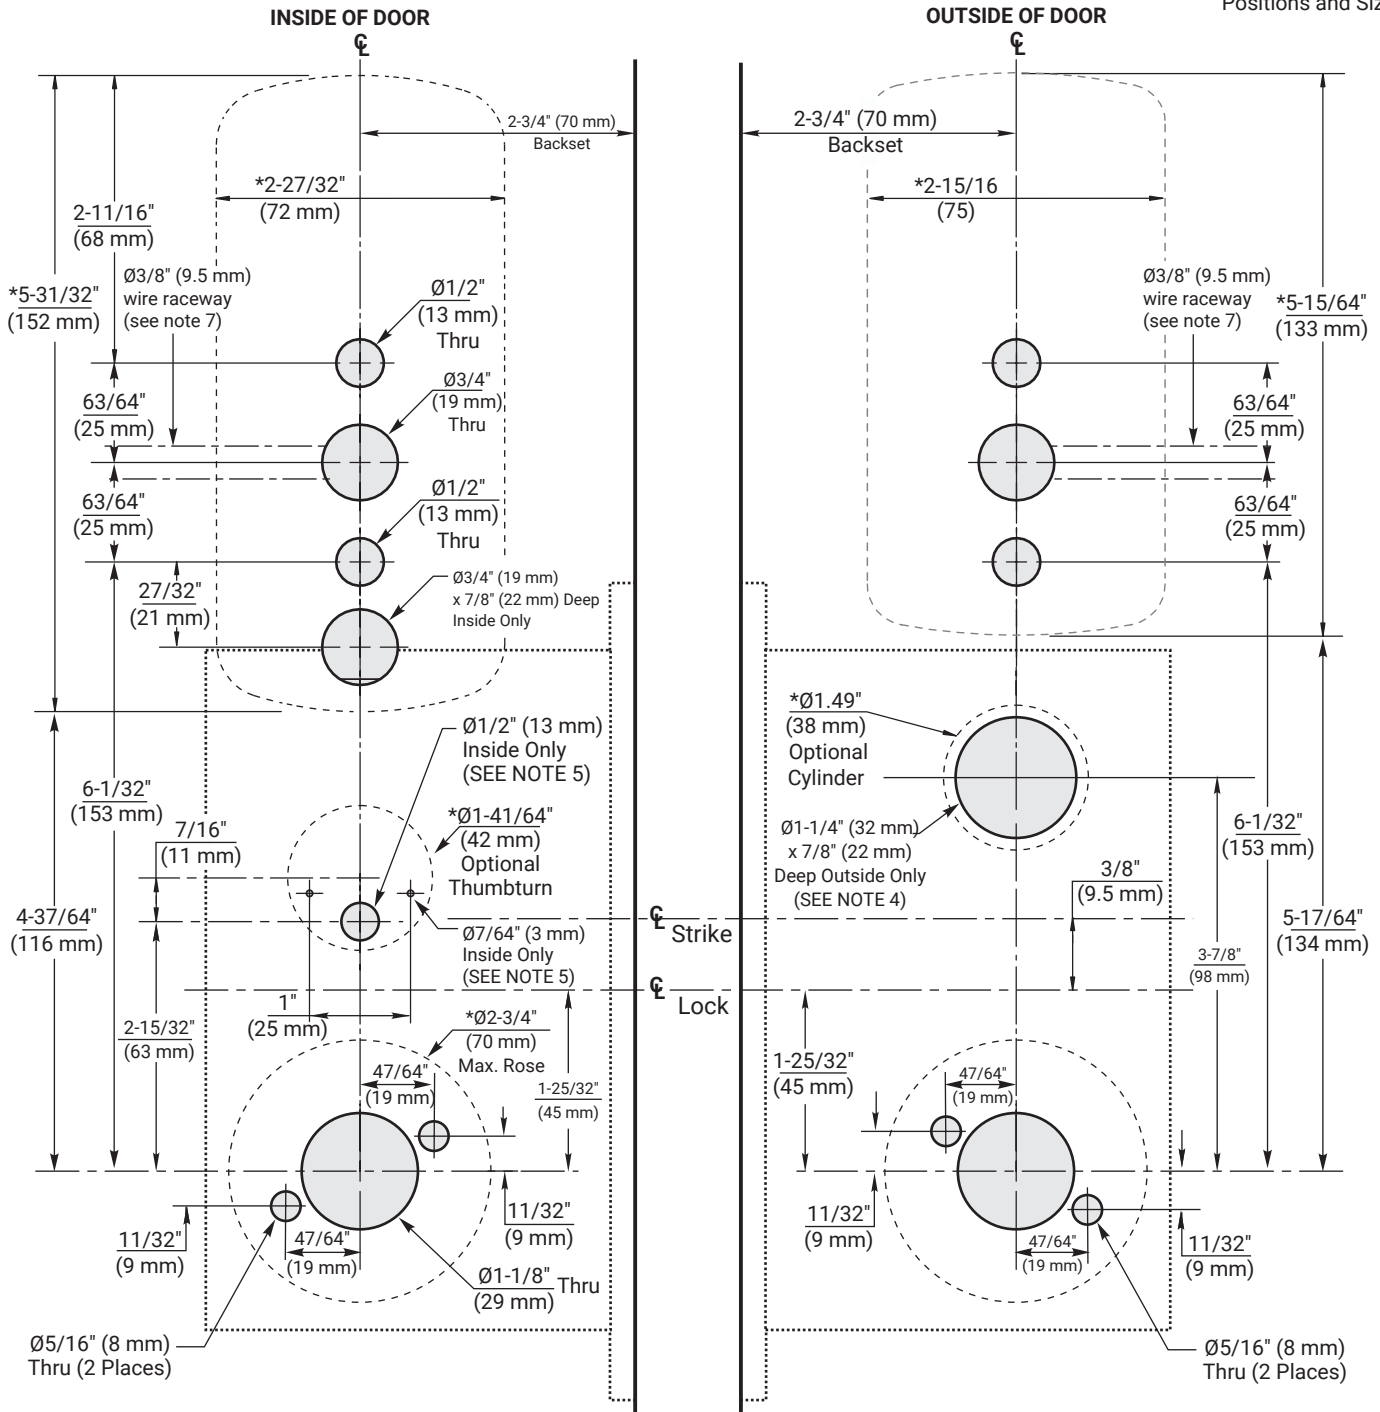

RESPONSIBILITY
DOOR AND FRAME MANUFACTURERS ARE RESPONSIBLE FOR PROVIDING ADEQUATE CONSTRUCTION OR REINFORCEMENTS FOR PROPER INSTALLATION OF HARDWARE SHOWN. ALL ARCHITECTURAL BUILDERS HARDWARE MUST BE INSTALLED ON PROPERLY REINFORCED DOORS AND FRAMES, REGARDLESS OF TYPE, MATERIAL, OR METHOD OF CONSTRUCTION.

nexTouch® Access Mortise Lock

Wood and H.M. Door Preparation
Thru Bolted Sectional Lever Trim

800-810-9473

www.accentra-assaabloy.com

ACCENTRA
ASSA ABLOY

Experience a safer
and more open world

Copyright © 2022, 2023, 2024, ASSA ABLOY Access and Egress Hardware Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Access and Egress Hardware Group, Inc. is prohibited.

SUPERSEDES	80-8420-1000-999 (02/23)	DO NOT SCALE DRAWING	
TEMPLATE NUMBER	80-8420-1000-999	SHEET	1 of 1
		DATE	06/24