




ROCKWOOD®
ASSA ABLOY

Experience a safer
and more open world

ROCKWOOD Panic Device Comparison Sheet

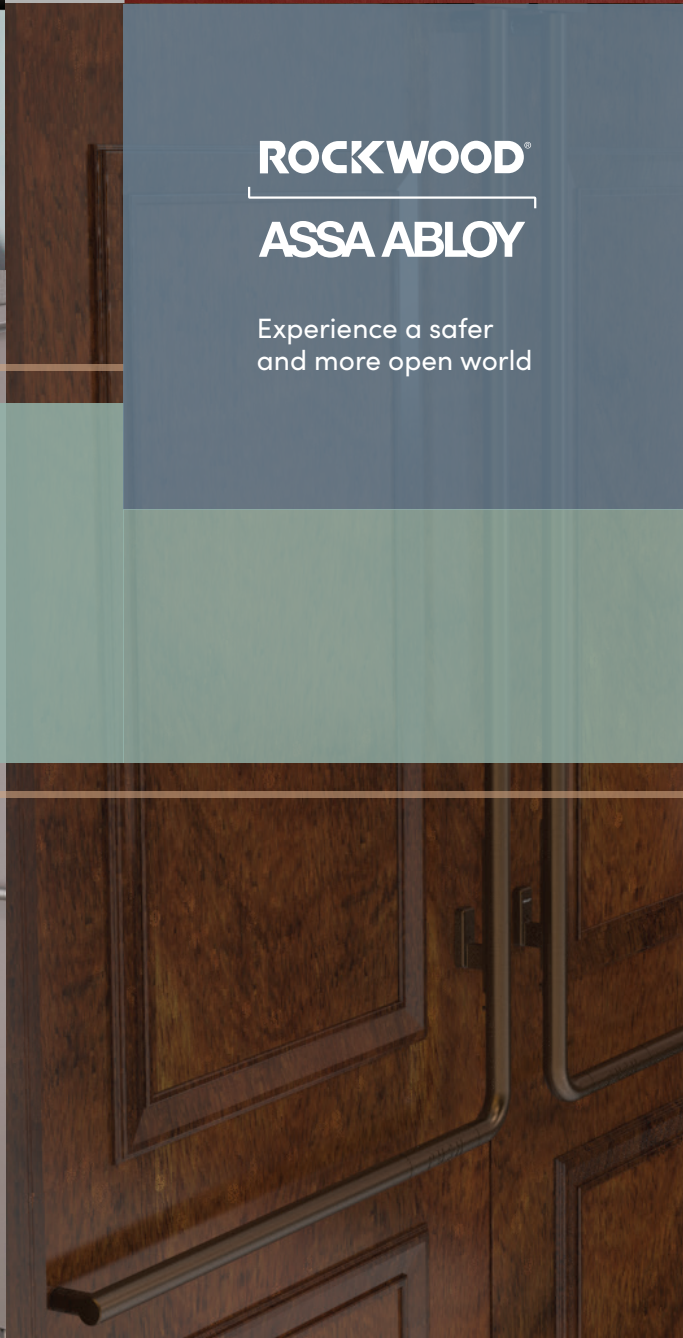

The ASSA ABLOY Group is the global leader in access solutions. Every day we help people feel safe, secure and experience a more open world.

ROCKWOOD®
ASSA ABLOY

PANIC DEVICE COMPARISON SHEET


PRODUCT FEATURES	METAL, STOREFRONT, WOOD PANIC (PDU8500)	GLASS PANIC (PDU8000)
Dampener	Included for security due to stiffness of door, to reduce vibration from door to panic device (Design Patent)	Not included - Glass absorbs the vibration due to it being less rigid than other door types
Top Mounting Location	Standard straight post mount directly into stile	Utilizes secure mounting plate on all glass door applications
Alignment Bushings	Plastic washers included with bushing, one-piece construction that rotates simultaneously for more alignment	Plastic washers included, separate from bushing, sits inside glass prep
Hole Prep	Two separate holes for easy fabrication	Figure 8 hole for secure glass mounting
Electric Strikes	Standard for all applications except medium stile doors	Standard
Flat Security Latch	Yes	Yes
Boundary Grooves	Yes	Yes
Mating Pull Configurations	Six	Six
Dogging Feature	Standard or Security, can be added or removed in field	Standard or Security, can be added or removed in field
Request to Exit (REX) Option	Yes, not available with fire rated or ADA models	Yes, available for P style openings only - not compatible with 2-3/4" rail or ADA panic models
Keyed and Non-Keyed Options	Yes	Yes
Certifications	- ANSI/BHMA A156.3-2025 (32 and 32D finishes only) - UL 305 (2017) - CAN/ULC-S132 (2016) - California Building Code (2019) Sec. 11B-309.4* - ADA Compliant - ANSI/BHMA A156.41 (2020) - IBC Sec. 1010.1.9.6 (2021) - A156.3-2020 1000lb Security Test - UL10C 90-minute with Hose Stream (up to 8'x8' pairs of hollow metal, wood/composite doors only)	- ANSI/BHMA A156.3-2025 (32 and 32D finishes only) - UL 305 (2017) - CAN/ULC-S132 (2016) - California Building Code (2019) Sec. 11B-309.4* - ADA Compliant - ANSI/BHMA A156.41 (2020) - IBC Sec. 1010.1.9.6 (2021) - A156.3-2020 1000lb Security Test - ANSI/BHMA A156.44, Grade 1
Testing	All devices tested before shipping	All devices tested before shipping
Packaging	- Medium shipping crates - Full height mating pulls sent separately - Two-piece option available, standard packaging. Mating pull shipped with panic device	- Medium shipping crates - Full height mating pulls sent separately - Two-piece option available, standard packaging. Mating pull shipped with panic device
Assembly Location	America's County: Somerset County, Pennsylvania	America's County: Somerset County, Pennsylvania

*This option was specifically designed to be used in the state of California or other areas where a 5lb. activation force is required to meet ADA. For other geographies, we recommend using our standard PDU8500.


Rockwood Manufacturing
300 Main St.
Rockwood, PA 15557
P: 800 485 2424
www.rockwoodmfg.com

ASSA ABLOY Opening Solutions
Door Security Solutions Canada
Vaughan, ON L4K 4T9
P: 800 461 3007
assaabloydss.ca


PDU8500



Top Mounting Location




Alignment Bushings




Hole Prep


PDU8000



Top Mounting Location



Alignment Bushings



Hole Prep