

Rockwood LP3305

Locking Pull

Half Height

Experience a safer
and more open world

Complete this form and email to: orders.rockwood@assaabloy.com / or fax to: 800 922 9212

Customer Information




Company Name: _____ Date: _____
 Account #: _____ Phone/Fax: _____ / _____
 Email: _____ PO #: _____ Line #: _____
 Door #'s: _____

Half Height
Bolts Down (DBD)

Qty: _____

Typical Pull Length* - 50"

*Nominal Length - Pulls will be sized to fit job condition. Cylinder must be located 34" to 48" above finished floor to meet ADA requirements. California ADA requires cylinder to be located 36"-46" above finished floor.

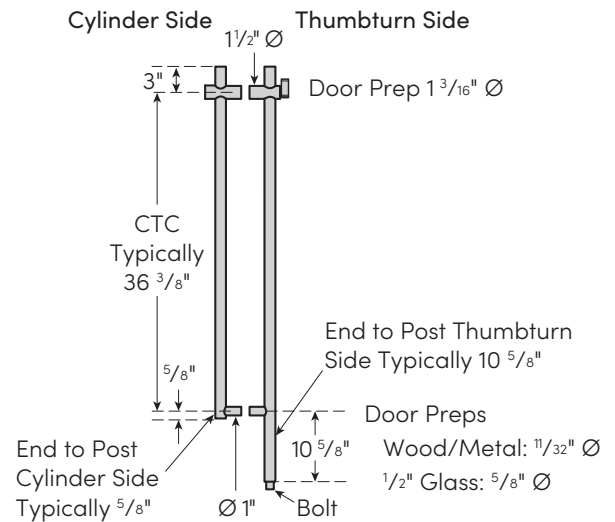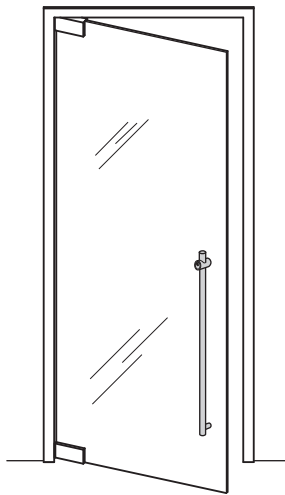

Finish Options:

- US3/605 ◦ US4/606 ◦ US32/629
- US32D/630 ◦ US32DMS ◦ US32MS
- US10BL/614 ◦ US10B/613 ◦ 10BE/613E ◦ BSP
- WSP ◦ Stock Powder Coats (specify): _____

CTC (from 10" to 75"): _____

Bottom End to Post Thumbturn Side

(from 3" to 16" in 1/16" increments): _____

Bottom End to Post Cylinder Side

(typically 5/8"): _____

Door Type: ◦ Glass ◦ Metal ◦ Wood

Door Thickness: _____

Cylinder Type:

- 01-Stock ASSA ABLOY Accentra
(not available on PC finishes)
- 02-SFIC Housing (standard)
- 03-SFIC Housing w/PCC
- 05-Customer Sending Cylinder to Factory
Make: _____
Model: _____
Length of Cylinder: _____
- 07-Dummy Cylinder
- 09-7 PIN SFIC HSG w/ASSA ABLOY Accentra Core

Thumbturn Type: ADA Thumbturn Comes
Standard with this Product

Hole Size (for glass door application only): _____

Your signature indicates the information contained on this order form is accurate and ready to be manufactured.

(customer signature) _____ (date) _____

Rockwood Manufacturing Company
300 Main St.
Rockwood, PA 15557
www.rockwoodmfg.com
1 800 458 2424

Copyright © 2019-2025, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited. Printed in the U.S.A.