


PDU8000/PDU8500 Cylinder Recommendations Template

Experience a safer
and more open world

For installation instructions please visit our website www.assaabloyglass.us




NOT TO SCALE

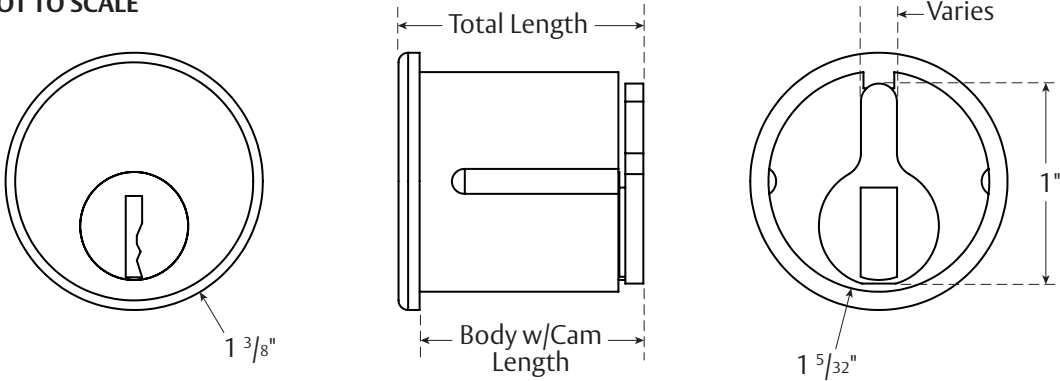

T-CYLCAM
Template

Effective date:
August 13, 2021

Supersedes: All Previous

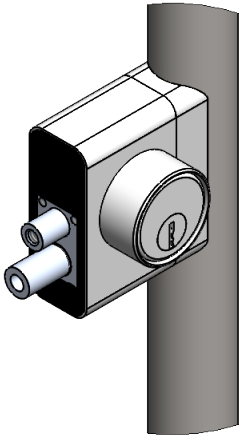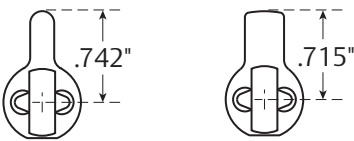

LENGTH REQUIREMENTS:

Total length must be between 1 1/8" to 1 7/8"

CAM REQUIREMENTS:

Length must be 1" +/- 1/16", Width can range 3/16" to 5/16"

FUNCTION REQUIREMENTS:

Mechanism must be free spinning 180 degrees

TOTAL LENGTH	BODY W/CAM LENGTH	CYLINDER RING USED
1 1/8"	1"	CUSTOM
1 1/4"	1 1/8"	PD1212
1 3/8"	1 1/4"	CUSTOM
1 1/2"	1 3/8"	PD1335
1 5/8"	1 1/2"	CUSTOM
1 7/8"	1 3/4"	CUSTOM

COMPANY	PRODUCT #'S	COMPATIBLE CAM
ACCENTRA (Standard)	K660, 2153, 1108	2160, 1161
SARGENT	41 thru 44	#112
CORBIN RUSSWIN	10 Series	A04, A62
SCHLAGE	20, 26, 80, 91 (conventional, SFIC, FSIC)	K510, L583, B502, B520
ASSA	9851-4, 8851-4, E6551-4, 6551-4, 6151-4, L651-4, 651-4	#5, #7, #10
STANLEY/BEST	1E Series	C128, C129, C136, C208

ASSA ABLOY Opening Solutions
Glass Solutions
Rockwood, PA
P: 800.458.2424 • F: 800.922.9212
www.assaabloydooraccessories.us