


Architectural Door Accessories

Rockwood ESK-DBL-HMF Double Electric Strike For Hollow Metal Frames (Page 1)

Experience a safer
and more open world

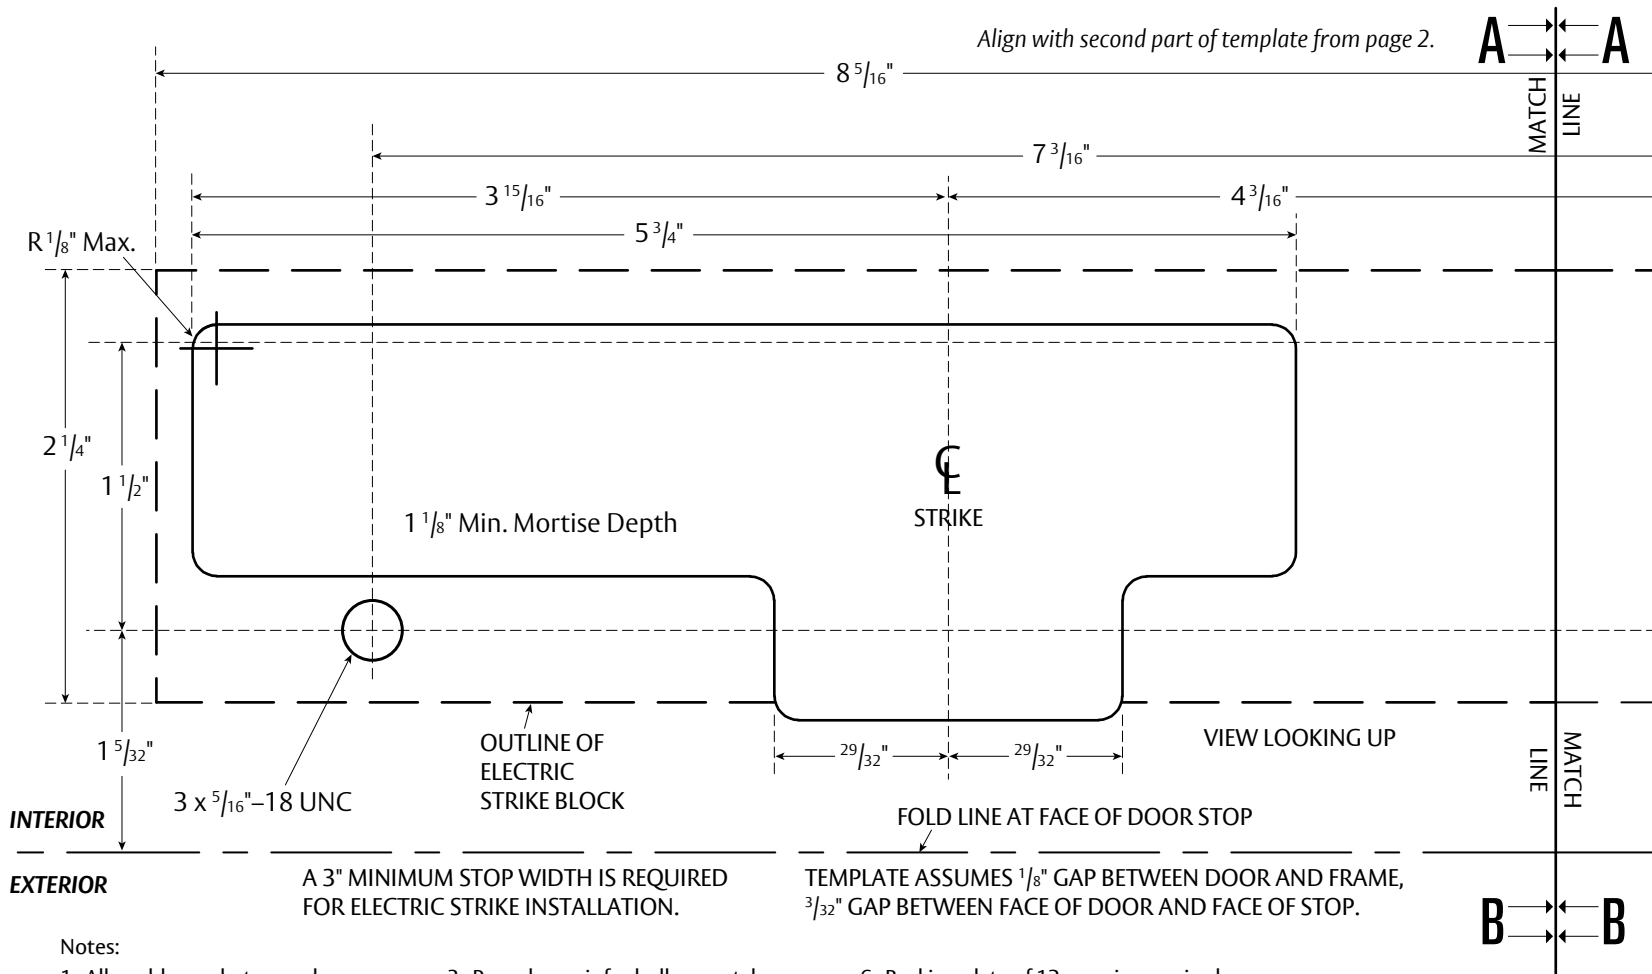

Template ESK-DBL-HMF

Effective date: June 1, 2020
Supersedes: All Previous

NOTE: ASSA ABLOY reserves the right to make product changes and is not responsible for obsolete template errors. To ensure your template is current, please visit our website at www.assaabloydooraccessories.us or call us at 800-458-2424.

Notes:

1. Allowable gap between doors is ¹/₈", consult factory if gap is not ¹/₈", allowable backset for double doors is 4 ¹/₈".
2. View is from bottom of header.
3. Prep shown is for hollow metal frames only.
4. A 3" minimum stop width is required for Electric Strike installation in double rabbet frames.
5. ⁵/₈" stop height only.
6. Backing plate of 12 ga. min. required in door stop for strike installation.
7. ⁵/₁₆"-18 fasteners provided.
8. It is recommended that frame be prepped by door/frame manufacturer.

PRINT ON 14" X 8.5" PAPER OR LARGER AT 1:1 SCALE. VERIFY MEASUREMENTS AFTER PRINTING BEFORE USING THIS AS A TEMPLATE.

Rockwood ESK-DBL-HMF Double Electric Strike For Hollow Metal Frames (Page 2)

