


Architectural Door Accessories

Rockwood ESK-MS-SGL-SWING4 Single Electric Strike Swing 4/LHR for Medium Stile (Page 1)

Experience a safer
and more open world

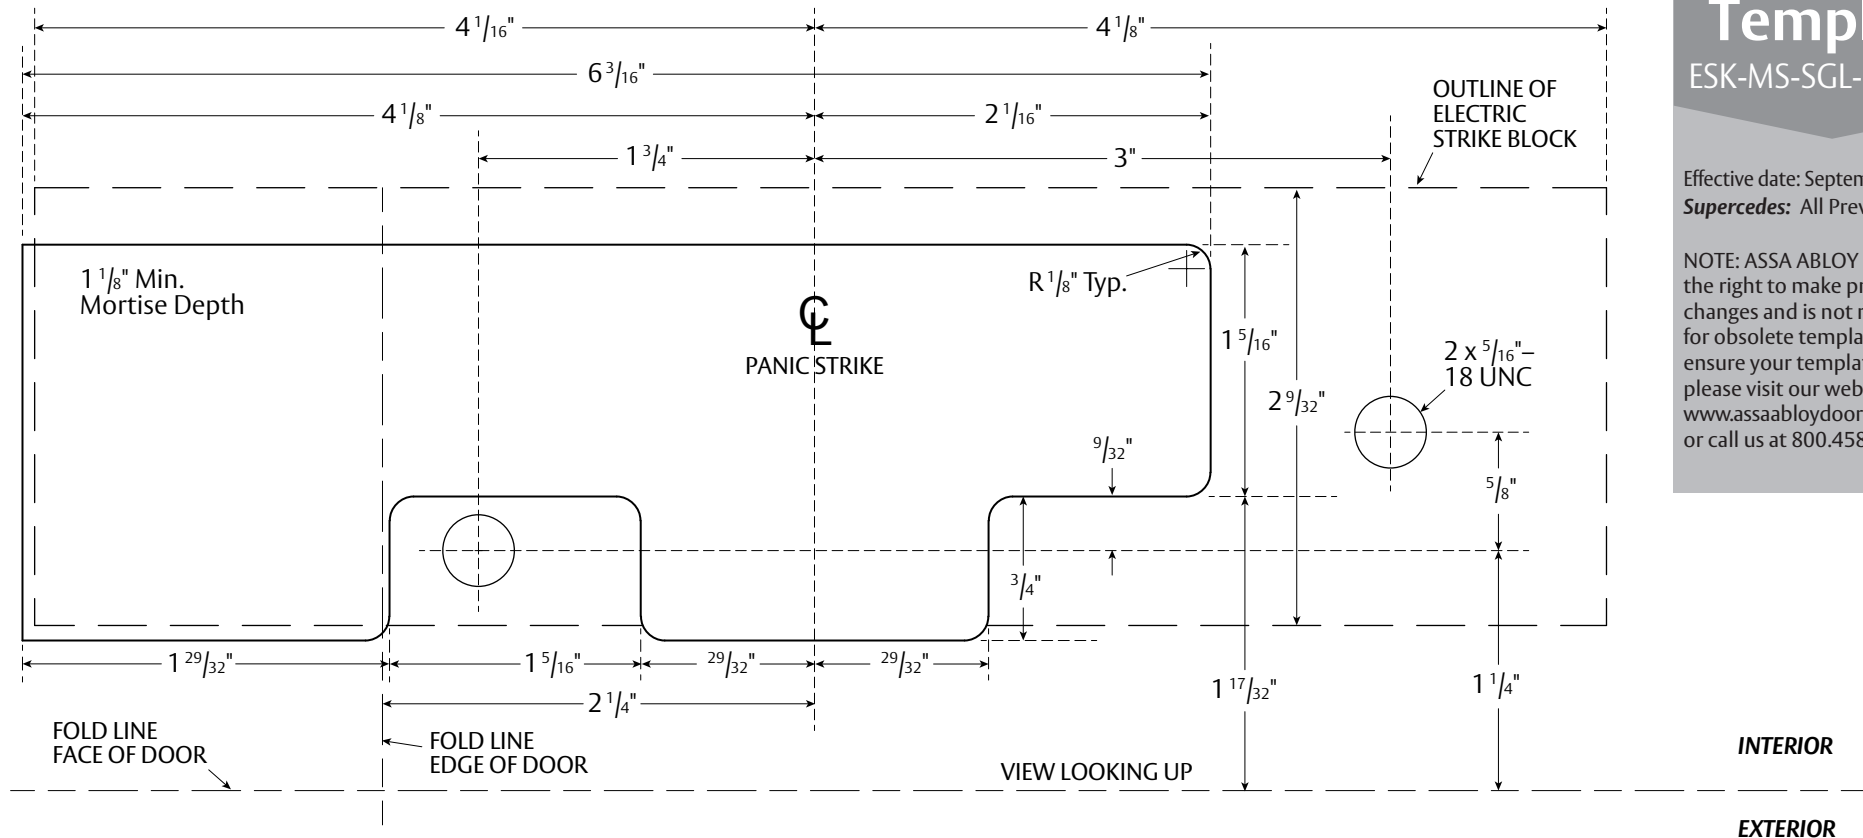

Template ESK-MS-SGL-SWING4

Effective date: September 14, 2021
Supersedes: All Previous




NOTE: ASSA ABLOY reserves the right to make product changes and is not responsible for obsolete template errors. To ensure your template is current, please visit our website at www.assaabloydooraccessories.us or call us at 800.458.2424.

Notes:

1. Allowable distance from edge of door to centerline of strike is 2 1/4", consult factory if distance to centerline is different.
2. View is from bottom of header.
3. Prep shown is for medium stile storefront doors only, minimum stile width is 3 1/2".
4. Backing plate of 12 ga. min. required in header for strike installation.
5. 5/16"-18 fasteners provided.
6. For headers less than or equal to 5 1/4" wide, cover is required by others to conceal a portion of electric strike.

PRINT ON 11" X 8.5" PAPER OR LARGER AT 1:1 SCALE. VERIFY MEASUREMENTS AFTER PRINTING BEFORE USING THIS AS A TEMPLATE.

Rockwood ESK-MS-SGL-SWING4 Single Electric Strike Swing 4/LHR for Medium Stile (Page 2)

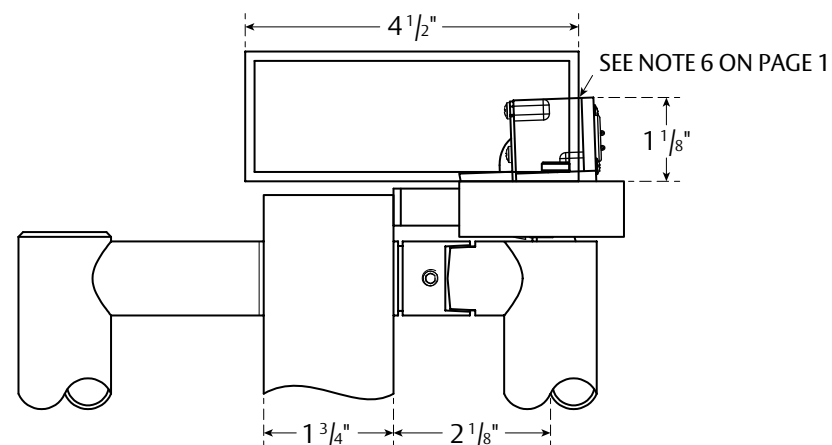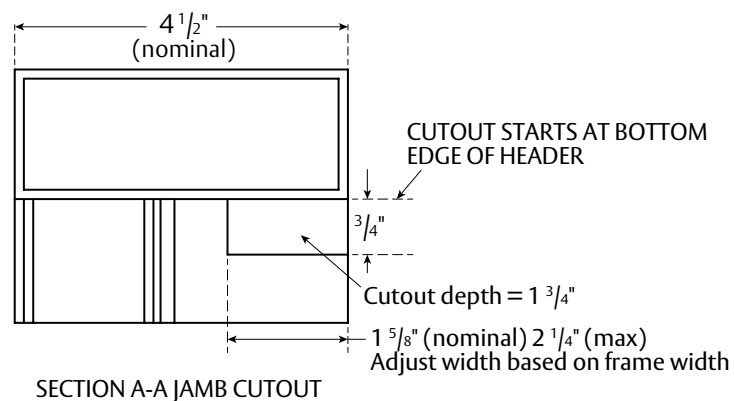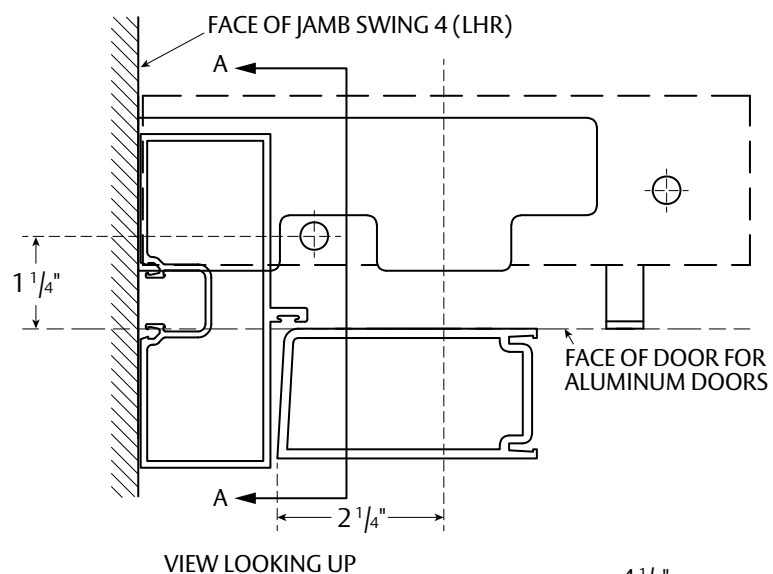

NOT TO SCALE