


Architectural Door Accessories

Rockwood ESK-SGL-SFWS-SWING3 Single Electric Strike Swing 3/RHR for Wide Stile

Experience a safer
and more open world

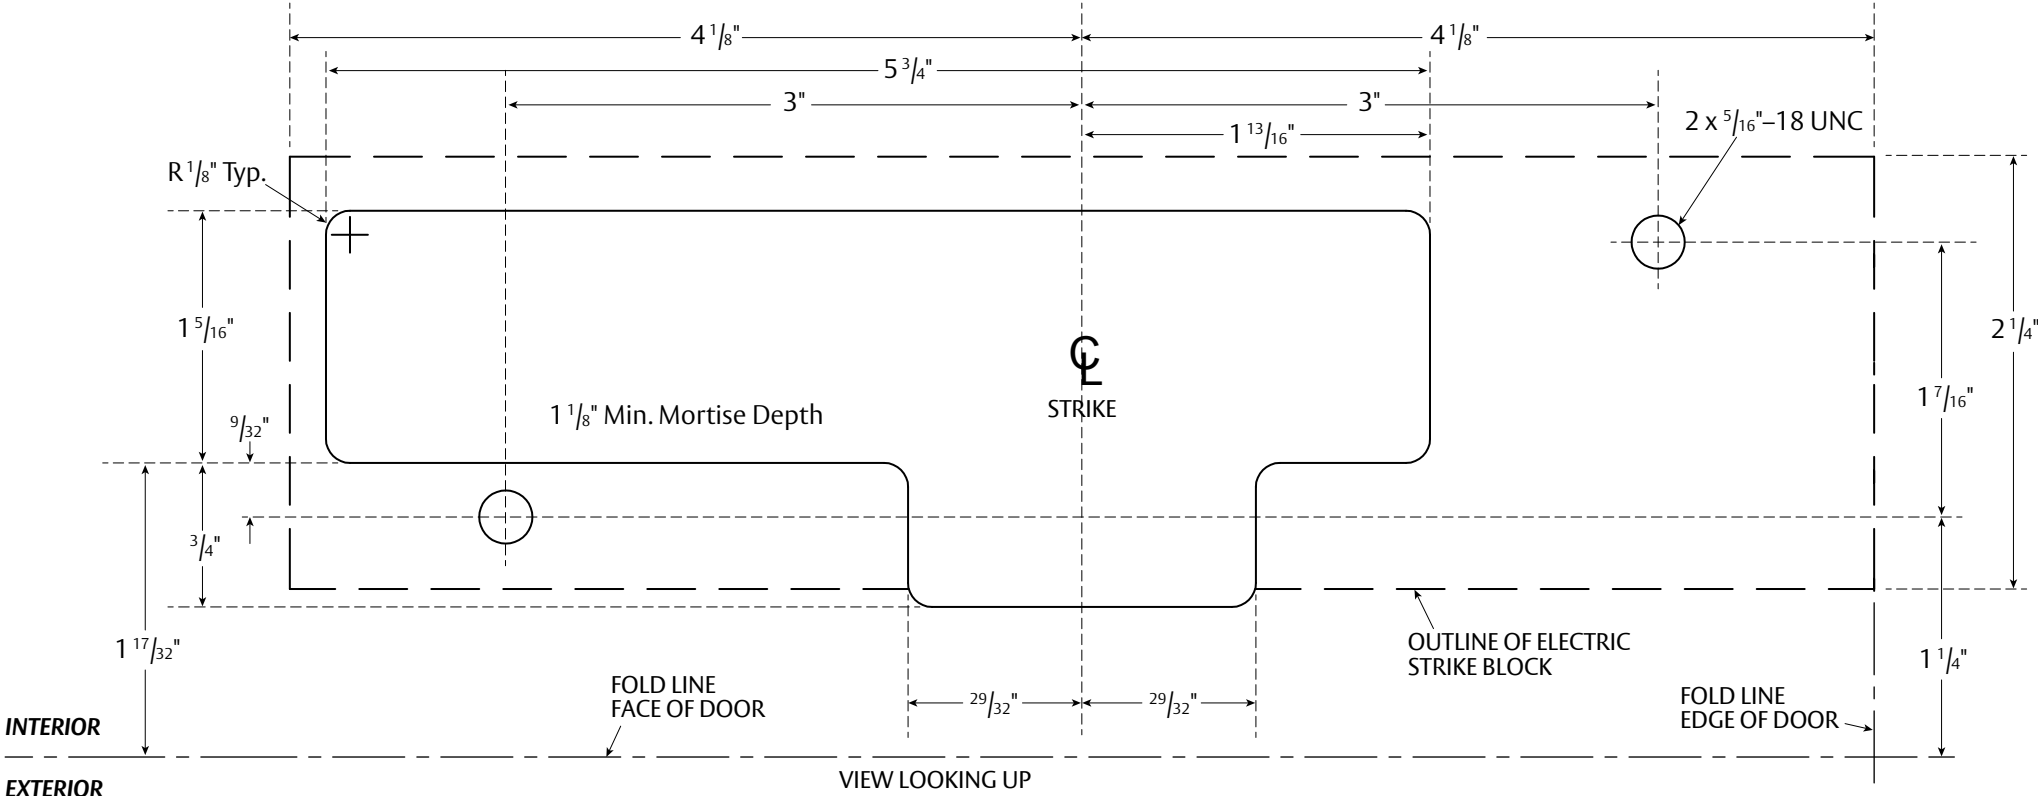

Notes:

1. Allowable distance from edge of door to centerline of strike is 4 1/8", consult factory if distance to centerline is different.
2. View is from bottom of header.
3. Prep shown is for wide stile storefront doors only, stile widths is 5" or greater.
4. Backing plate of 12 ga. min. required in header for strike installation.
5. 5/16"-18 fasteners provided.
6. For headers less than or equal to 5 1/4" wide, cover is required by others to conceal a portion of electric strike.

PRINT ON 14" X 8.5" PAPER OR LARGER AT 1:1 SCALE. VERIFY MEASUREMENTS AFTER PRINTING BEFORE USING THIS AS A TEMPLATE.

Template

ESK-SGL-SFWS-SWING3

Effective date: June 1, 2020

Supersedes: All Previous

NOTE: ASSA ABLOY reserves the right to make product changes and is not responsible for obsolete template errors. To ensure your template is current, please visit our website at www.assaabloydooraccessories.us or call us at 800-458-2424.