


Architectural Door Accessories

Rockwood MSK-MS-SGL-SWING4 Single Manual Strike SWING 4/LHR for Medium Stile

Experience a safer
and more open world

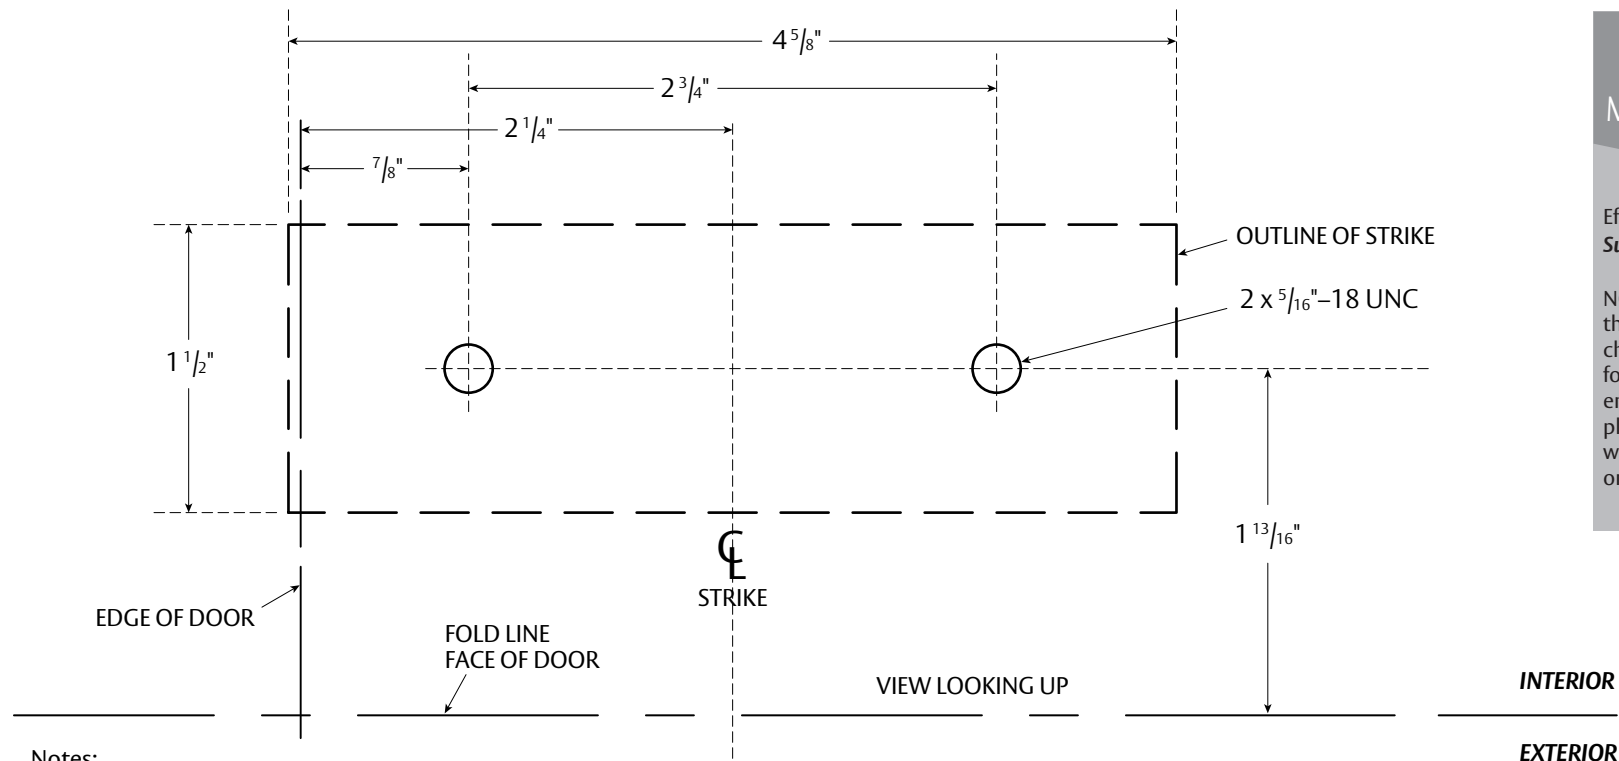

Notes:

1. Allowable distance from edge of door to centerline of strike is $2\frac{1}{4}"$, consult factory if distance to centerline is different.
2. View is from bottom of header.
3. Prep shown is for medium stile storefront doors only, minimum stile width is $3\frac{1}{2}"$.
4. Backing plate of 12 ga. min. required in header for strike installation.
5. $\frac{5}{16}"-18$ fasteners provided.

**PRINT ON 11" X 8.5" PAPER OR LARGER AT
1:1 SCALE. VERIFY MEASUREMENTS AFTER
PRINTING BEFORE USING THIS AS A TEMPLATE.**

Template MSK-MS-SGL-SWING4

Effective date: June 1, 2020
Supersedes: All Previous

NOTE: ASSA ABLOY reserves the right to make product changes and is not responsible for obsolete template errors. To ensure your template is current, please visit our website at www.assaabloydooraccessories.us or call us at 800-458-2424.