


ESK-SGL-GLASS-SWING4 Single Electric Strike Swing 4/LHR for Glass Doors

Experience a safer
and more open world

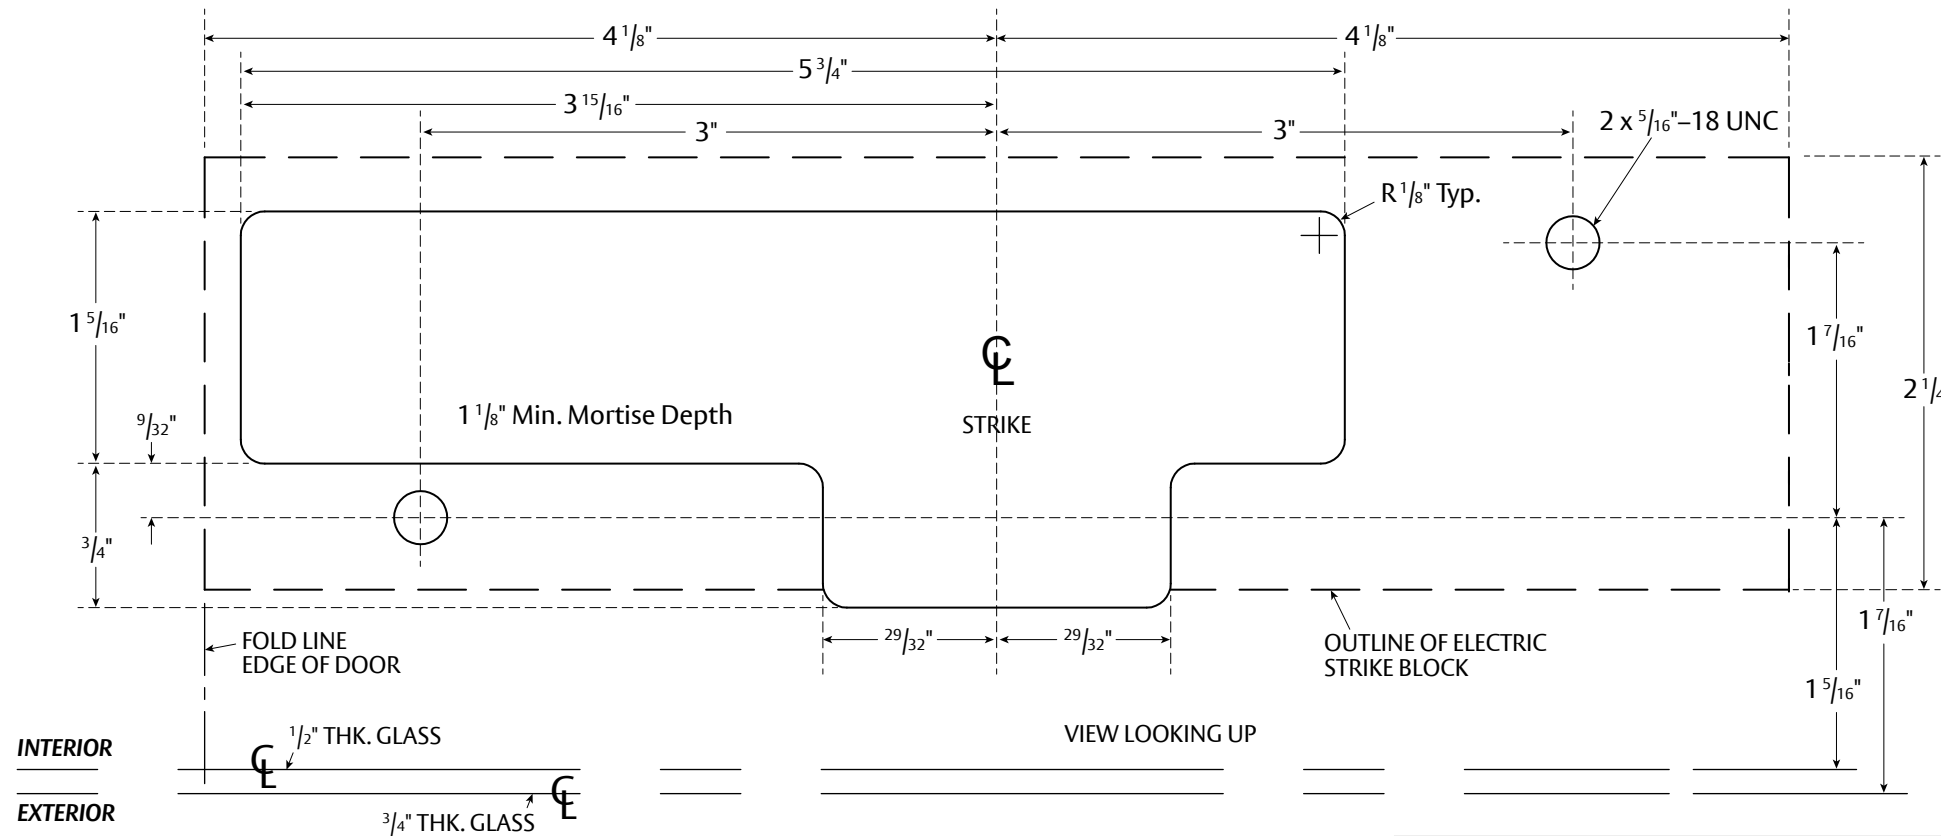

Notes:

1. Allowable distance from edge of door to centerline of strike is 4 1/8", consult factory if distance to centerline is different.
2. View is from bottom of header.
3. Prep shown is for glass doors only.
4. 5/16"-18 fasteners provided.

PRINT ON 14" X 8.5" PAPER OR LARGER AT 1:1 SCALE. VERIFY MEASUREMENTS AFTER PRINTING BEFORE USING THIS AS A TEMPLATE.

Template ESK-SGL-GLASS-SWING4

Effective date: June 1, 2020
Supersedes: All Previous

NOTE: ASSA ABLOY reserves the right to make product changes and is not responsible for obsolete template errors. To ensure your template is current, please visit our website at www.assaabloyglass.us or call us at 855.594.6989.