

Rockwood FL3301  
Locking Pull  
Full Height



Experience a safer  
and more open world

Complete this form and email to: orders.rockwood@assaabloy.com / or fax to: 800 922 9212

Customer Information

Company Name: \_\_\_\_\_ Date: \_\_\_\_\_  
Account #: \_\_\_\_\_ Phone/Fax: \_\_\_\_\_ / \_\_\_\_\_  
Email: \_\_\_\_\_ PO #: \_\_\_\_\_ Line #: \_\_\_\_\_  
Door #'s: \_\_\_\_\_

Quantity: \_\_\_\_\_

Finish: ☐ US32/629 ☐ US32D/630 ☐ US32DMS ☐ 10BE/613E ☐ BSP ☐ WSP ☐ Stock Powder Coats (specify): \_\_\_\_\_

Top CTC (from 10" to 75"): \_\_\_\_\_  
For .5" Thick Glass Door at 108" tall, max CTC is 64 1/8" to keep cylinder within ADA guidelines.

Bottom CTC (from 10" to 50"): \_\_\_\_\_

Bottom End to Post (from 3" to 12" in 1/16" increments): \_\_\_\_\_

Door Type: ☐ Glass ☐ Metal ☐ Wood

Door Thickness: \_\_\_\_\_

Cylinder Type: ☐ 01-Stock (not available on PC finishes) ☐ 02-SFIC Housing (standard) ☐ 03-SFIC Housing w/PCC  
☐ 05-Customer Sending to Rockwood ☐ 07-Dummy Cylinder ☐ 09-7 PIN SFIC HSG w/ACCENTRA Core

Strike Options (check all that apply):  
☐ Manual ☐ 1600 Electric ☐ 310 Electric: ☐ Fail Safe or ☐ Fail Secure  
☐ 12V or ☐ 24V  
☐ AC or ☐ DC  
☐ LM – Lock Monitor (Optional) ☐ LCBMA – Latch Bolt Monitoring (Optional on 310)  
☐ Less Strike  
☐ \*Medium Stile (Optional on Manual, 310 and 9200).

\*Use Medium Stile (MS) strikes for 2 1/4" backset. Order Form, Prep Details, and Strike Templates are based off of strikes sold through Rockwood.

Strike Finish Options:  
☐ US32/629 ☐ US32D/630 ☐ US32DMS ☐ 314E ☐ BSP ☐ FBPC ☐ WSP ☐ Stock Powder Coats (specify): \_\_\_\_\_

Dogging Feature: ☐ Yes (standard) ☐ No

Hole Size (for glass door application only): \_\_\_\_\_

OPTIONAL:

Push Bar Options: ☐ BEPT – Bent End Thumbturn Side ☐ PMPT – Post MT Thumbturn Side  
☐ BEPC – Bent End Cylinder Side ☐ PMPC – Post MT Cylinder Side

Handing (specify quantity): LHR: \_\_\_\_ RHR: \_\_\_\_

Push Bar CTC (from 10" to 48"): \_\_\_\_\_


Product is for outswing doors only.

Your signature indicates the information contained on this order form is accurate and ready to be manufactured.

\_\_\_\_\_  
(customer signature) (date)

NOT TO SCALE

The ASSA ABLOY Group is the global leader in access solutions. Every day we help people feel safe, secure and experience a more open world.

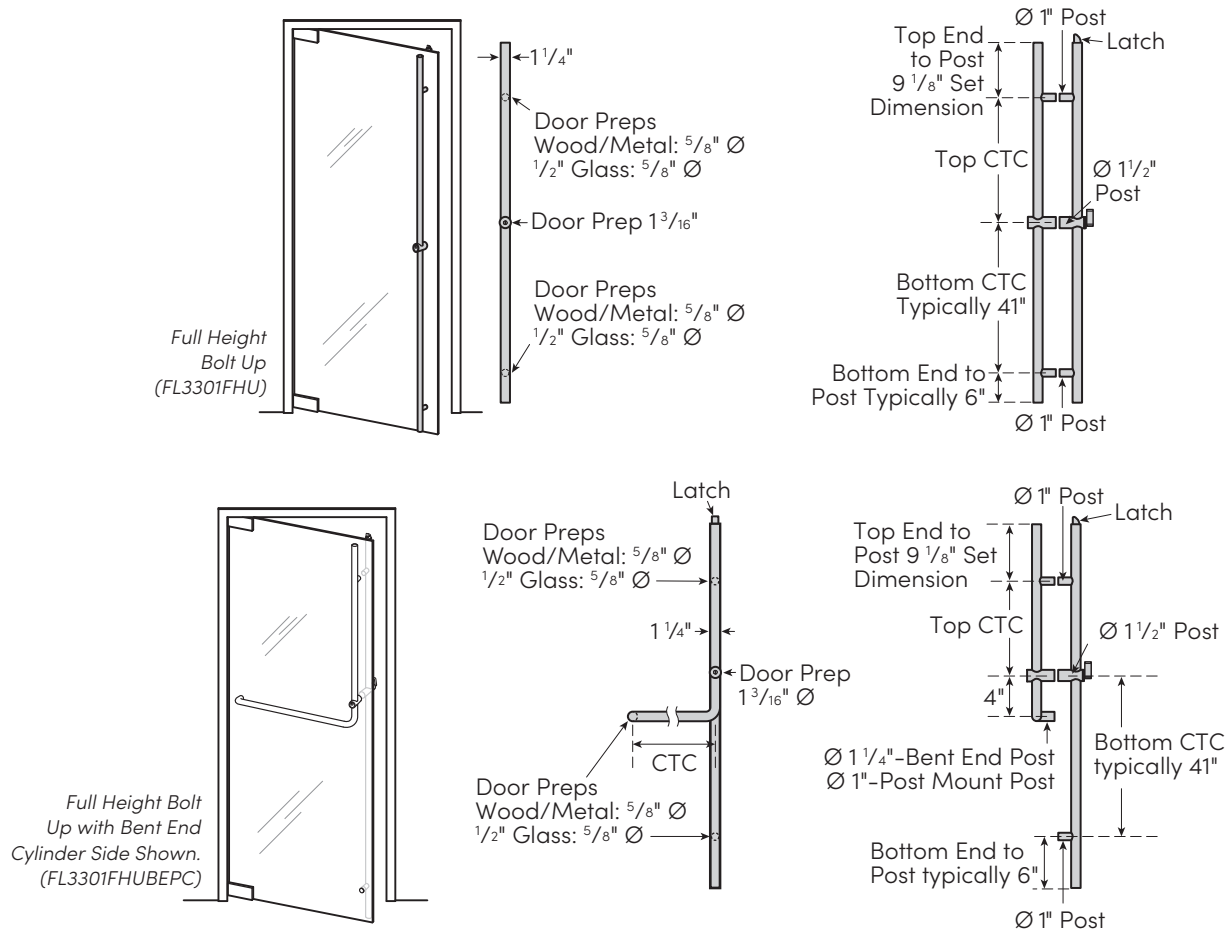

Note: Cylinder must be located 34"-48" above finished floor to meet ADA requirements. California ADA requires cylinder to be located 36"-46" above finished floor.

#### Prep Suggestions

Door Prep Details for use with Rockwood Manual or Electric Strikes						
Door Type	Top of Door to Centerline of Top Hole Prep	Back Set				
		Back Set	Wide Stile	Medium Stile	Single Door	Double Door
Glass	$9\frac{7}{8}"$	$4\frac{1}{8}"$				
Storefront (removable/no stop)	$9\frac{7}{8}"$		$4\frac{1}{8}"$	$2\frac{1}{4}"$		
Wood/Hollow Metal (removable/no stop)	$9\frac{7}{8}"$				$5\frac{1}{8}"$	$4\frac{1}{8}"$
Wood/Hollow Metal ( $\frac{5}{8}"$ Stop)	$10\frac{1}{2}"$				$5\frac{1}{8}"$	$4\frac{1}{8}"$

Assuming  $\frac{1}{8}"$  Top Door Gap. Not available on Narrow Stile Doors, Glass Door with 10" Top Rail, or Inswing Doors. For best product alignment, the door should be prepped at the door manufacture.

#### HOLLOW METAL FRAME REQUIREMENTS:

**Stop Height:**  $\frac{5}{8}"$ . This will shift the top of the device down on the door when compared to an aluminium frame.

**Stop Width:** Minimum of 3" wide.

**Reinforcement:** Minimum 12 gauge closer reinforcement along the stop width in the area that the strike will be attached.

**NOT TO SCALE**