


Architectural Door Accessories


ASSA ABLOY
Opening Solutions

McKinney 200 Concealed Hinge 3D Adjustable

Experience a safer
and more open world

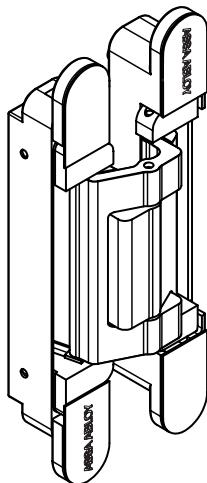

Hinge Arrangement

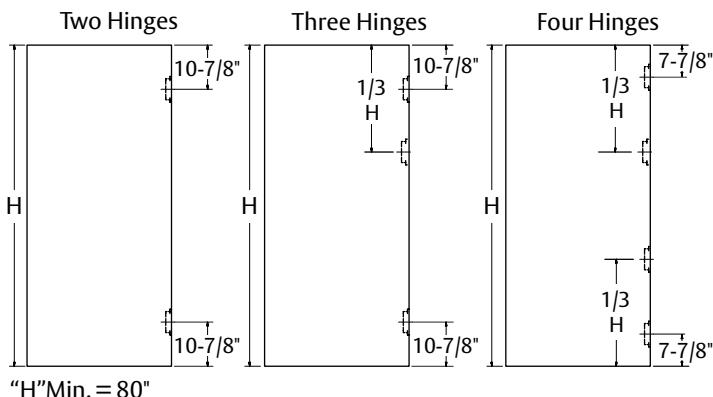

Load Capacity

See chart for minimum number of hinges required based on correct adjustment (all hinges carrying load), door width and door weight.



Door height minimum is 80".

Door thickness minimum is 1-3/4".

Note: Hinge spacing does not effect load capacity. The first door should always be checked before preparing more doors, if any. When installing with a door closer, at least 3 hinges are required, and reduce maximum door weight in chart by 30%.


Hinges	Door Width			
	32"	36"	42"	48"
2	487 lb	434 lb	373 lb	326 lb
3	548 lb	489 lb	419 lb	367 lb
4	609 lb	543 lb	466 lb	408 lb

Hinge Dimensions (millimeters)

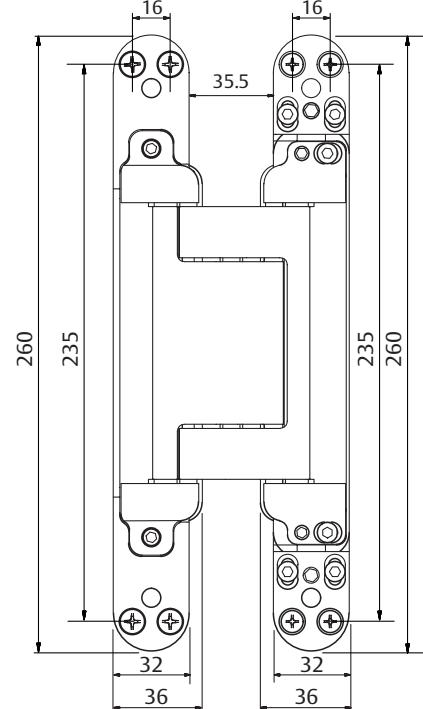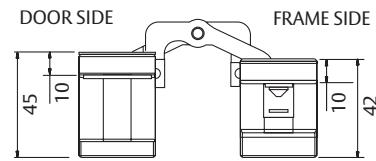


Milling Dimensions (millimeters)


Door Side

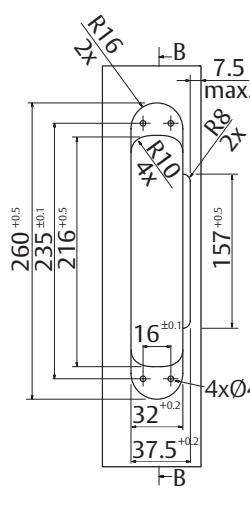

B-B (1:1)

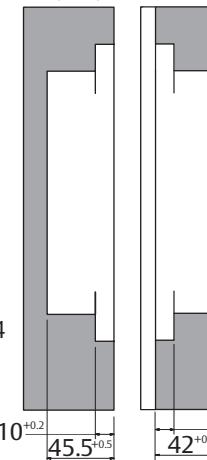


Frame Side

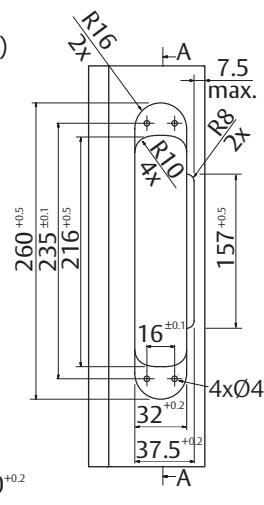

A-A (1:1)


Hinge Position In Relation to Required Door and Frame Dimensions (millimeter)

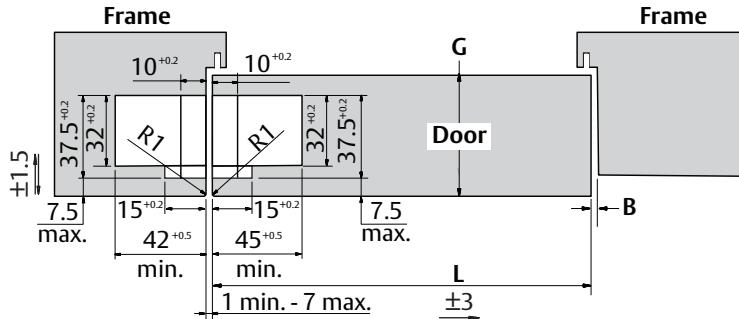

"G" Thick- ness of Door	"L" Width of Door			
	32"	36"	42"	48"
"B" Minimum Gap (mm)				
1-3/4"	4	4	3	3
2"	5	4	4	4
2-1/4"	5	4	4	4

Installation

1. Insert each hinge section marked "door" into door sockets created in milling. Hinges should be flush against door edge surface.
2. Secure hinge sections with four (4) M5-0.8x20mm metal screws or 35mm PHWS wood screws provided in screw packet.
3. Set door on frame by inserting each loose hinge section into socket created in milling.
4. Secure each hinge with four (4) M5-0.8x20mm metal screws or 35mm PHWS wood screws provided in screw packet.
5. Make adjustments.
6. Insert front hinge covers to hide screws.
Note: Removal of covers should be done carefully.

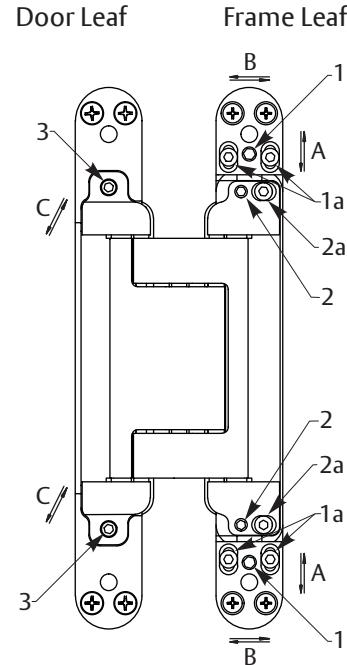

Adjustment

Adjustments to hinge are made with a 4mm Allen wrench. All hinges should carry load for proper installation.

- A. Vertical Adjustment** adjusts door up and down in frame (range +/- 3mm):
 - Loosen all blocking screws (1a) and unscrew top adjustment screw (1) until even with front surface of hinge.
 - Adjust by turning bottom adjustment screws (1). Alternate between hinges, max half turn at a time.
 - After adjusting, tighten all blocking screws (1a).
- B. Depth Adjustment** adjusts door in and out of frame (range +/- 1.5mm):
 - Loosen both blocking screws (2a).
 - Adjust by turning eccentric pins (2). Eccentric pins must be set in the same position.
 - After adjusted, tighten all blocking screws (2a).
- C. Horizontal Adjustment** adjusts door left and right in frame (range +/- 3mm):
 - Adjust by turning adjustment screws (3).
 - Ensure both screws are adjusted evenly in the insert.