

CUT  
SHEET

**PEM**KO  
**ASSA ABLOY**

## PEMKONNECT® MODULAR HINGE:

Full-Mortise Hinge  
Short Leaf Flush

Experience a safer  
and more open world

**\_FM\_SLF-HD1-M**

**BHMA**  
CERTIFIED



AVAILABLE FINISHES: **C, D**

WIDTH:  $\frac{5}{16}$ " (**7.9 mm**)

(between frame edge and door edge)

CAP WIDTH:  $\frac{25}{32}$ " (**19.8 mm**)

HEIGHT:  $1 \frac{11}{16}$ " (**42.9 mm**)

(to flange/frame & door edge sides)

HEIGHT:  $\frac{23}{32}$ " (**18.3 mm**)

(flange to top of cap)


**C** (Clear Anodized)

**D** (Dark Bronze Anodized)

Available in 83" (FM83SLF-HD1-M)

length standard. For 95" length, add

12" (FM12SLF-HD1-M) section to the 83" (FM83SLF-HD1-M) hinge. The 12" segment must be installed between the 40" and 43" hinge segments.

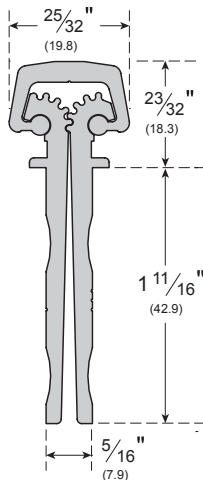

TITLE:

PREPARED FOR:

PREPARED BY:

DATE:

COMMENTS: