


## ESK-PDU8000-1600-SGL-GLASS-SWING3 PDU8000 Single 1600 Electric Strike Swing 3/RHR for Glass Doors

Experience a safer  
and more open world

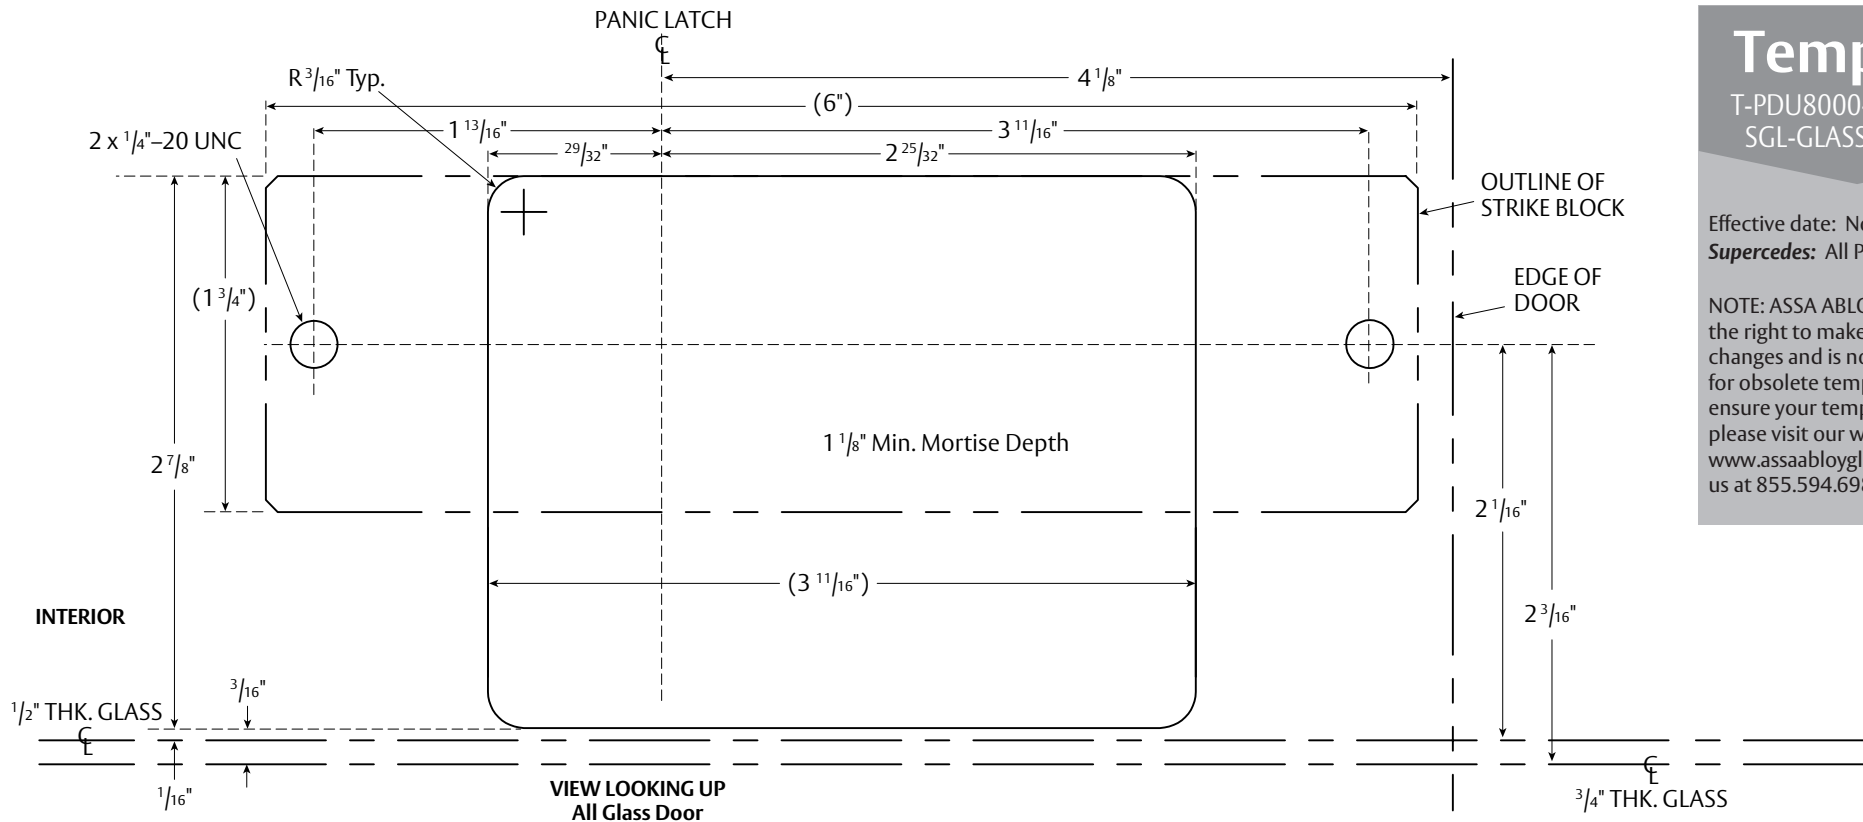

### Template

T-PDU8000-ESK-1600-SGL-GLASS-SWING3

Effective date: Nov. 12, 2022  
**Supersedes:** All Previous

NOTE: ASSA ABLOY reserves the right to make product changes and is not responsible for obsolete template errors. To ensure your template is current, please visit our website at [www.assaabloyglass.us](http://www.assaabloyglass.us) or call us at 855.594.6989.

EXTERIOR

Notes:

1. Allowable distance from edge of door to centerline of strike is  $4 \frac{1}{8}$ " , consult factory if distance to centerline is different.
2. View is from bottom of header.
3. Prep shown is for glass doors only.
4.  $\frac{1}{4}$ "-20 fasteners provided.

**PRINT AT 1:1 SCALE. VERIFY MEASUREMENTS AFTER PRINTING BEFORE USING THIS AS A TEMPLATE.**