ORDER FORM

Rockwood LP3401

Locking Pull with GripZone

Full Height

ROCKWOOD
ASSA ABLOY

Experience a safer and more open world

Complete this form and email to: orders.rockwood@assaabloy.com / or fax to: 800 922 9212

Customer Information


Company Name: _____ Date: _____

Account #: _____ Phone/Fax: _____ / _____

Email: _____ PO #: _____ Line #: _____


Door #'s: _____

○ **Full Height Bolt Up** (FHU) **Qty:** _____

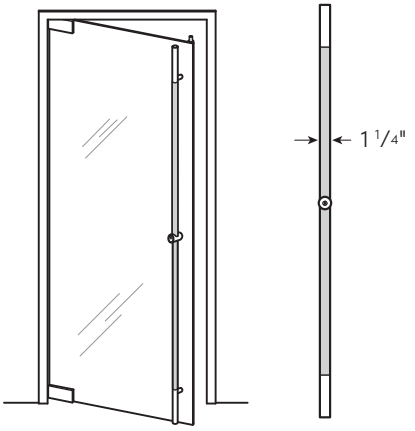

○ **Full Height Bolt Down** (FHD) **Qty:** _____

○ **Full Height Bolts Both** (FHB) **Qty:** _____

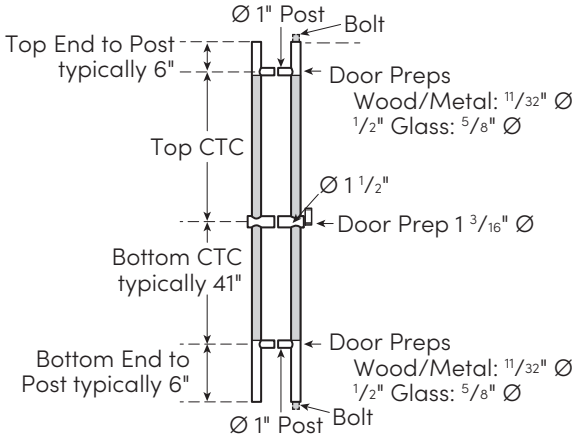

NOTE: Cylinder must be located 34"-48" above finished floor to meet ADA requirements. California ADA requires cylinder to be located 36"-46" above finished floor.

*Bolts shown at top and bottom for visual purposes. Bolt(s) will be dependent on application chosen.

Finish Options:
○ US3/605 ○ US32/629 ○ US32MS

Top CTC *(from 10" to 75")*: _____

Bottom CTC *(from 10" to 75")*: _____

Top End to Post *(from 3" to 12" in 1/16" increments)*: _____

Bottom End to Post *(from 3" to 12" in 1/16" increments)*: _____

Door Type:
○ Glass ○ Metal ○ Wood

Door Thickness: _____

Cylinder Type:
○ 01-Stock ASSA ABLOY Accentra
(not available on PC finishes)
○ 02-SFIC Housing *(standard)*
○ 03-SFIC Housing w/PCC
○ 05-Customer Sending Cylinder to Factory
Make: _____
Model: _____
Length of Cylinder: _____
○ 07-Dummy Cylinder
○ 09-7 PIN SFIC HSG w/ASSA ABLOY Accentra Core

Thumbturn Type: ○ ADA ○ Standard

Hole Size *(for glass door application only)*: _____

Your signature indicates the information contained on this order form is accurate and ready to be manufactured.

(customer signature) _____ *(date)* _____

Rockwood Manufacturing Company
300 Main St.
Rockwood, PA 15557
www.rockwoodmfg.com
1 800 458 2424

Copyright © 2019-2024, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited. Printed in the U.S.A.