ASSA ABLOY Bullet Resistance Level 4-8

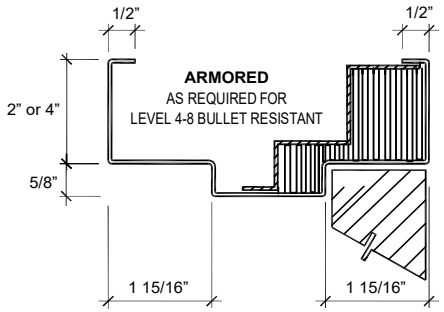

BULLET LEVEL 4-8 FRAME PROFILE

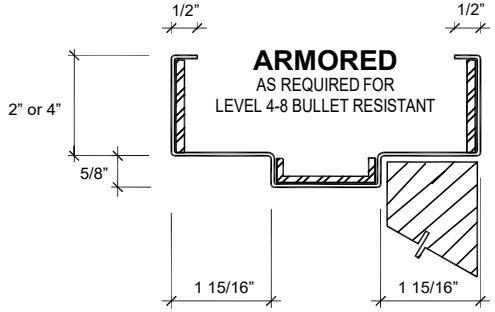

BULLET LEVEL 4-8 FRAME PROFILE

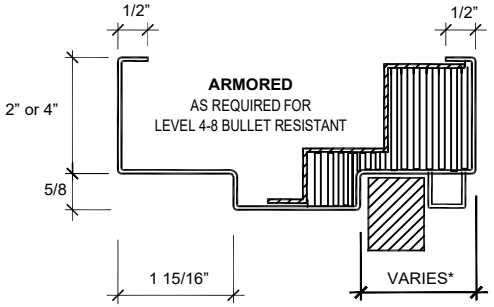

BULLET LEVEL 4-8 LITE PROFILE

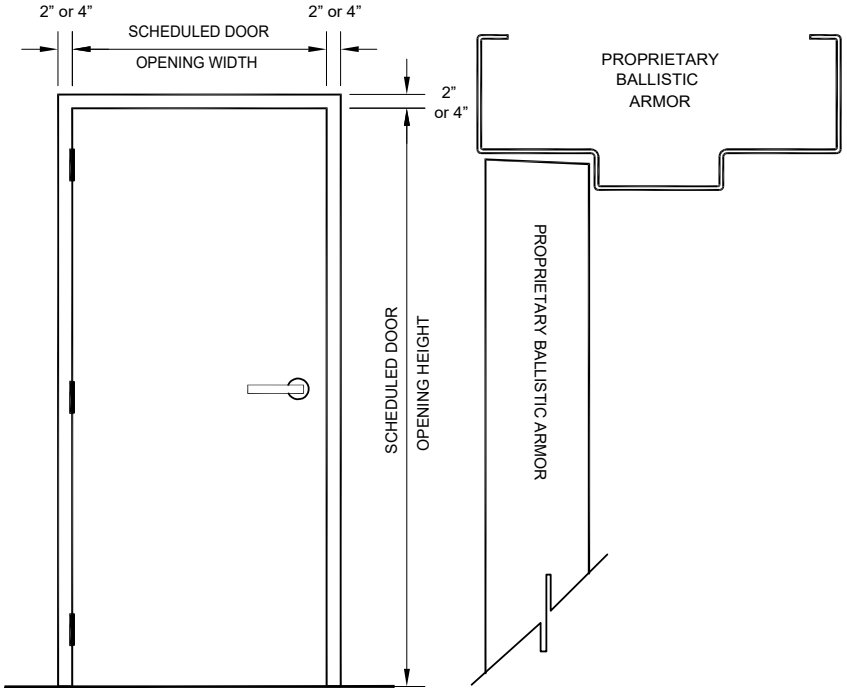

Specifications:

1. All exposed surfaces of door and frame to receive one coat of rust inhibitive prime paint.
2. Assembly is equipped with hollow metal door, frame, and created for shipment.
3. Nominal door thickness is 1 3/4".
4. Door weight is 26.75 pounds per square foot.
5. Doors are 14 gauge steel face sheets.
6. Frames are 14 gauge steel.
7. Special frame profile and anchor types are required.
8. Door edges are to be welded and finished smooth.
9. Visions available up to full glass.Vision kits vary between Levels 4-8.
   - 9.1. Minimum top rail 8.5"
   - 9.2. Minimum bottom rail 12"
   - 9.3. Minimum hinge and lock stile 8.5"
10. Available in conjunction with sound, stainless steel, blast, and lead lined options.
11. Frame profile minimum jamb depth:
    Single rabbet 3.75"
    Double rabbet 5.75"
12. Fire ratings not available
13. Max size = 4'0" x 8'0"

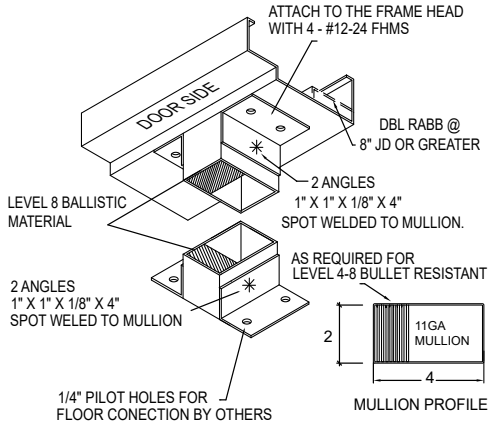

C76 BULLET RESISTANT LEVEL 4-8 REMOVABLE MULLION

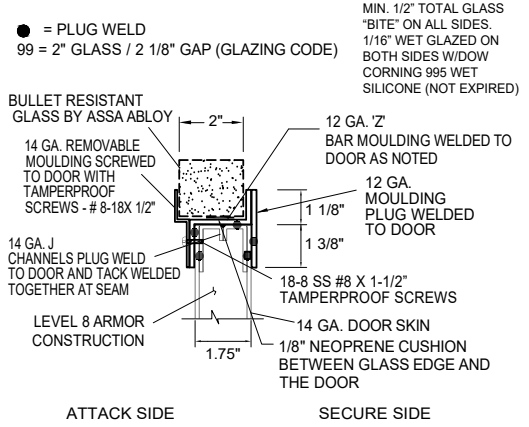

BULLET LEVEL 8 VISION MOULDING AT NON-FIRE RATED ONLY

Experience a safer
and more open world

Rating	Ammunition	Grain	(G)	Velocity (FPS)	Velocity (MPS)	No. of Shots
UL Level 4	.30 Caliber Rifle Lead Core Soft Point	180	11.70	2540	774	1
UL Level 5	7.62mm Rifle Lead Core FMJ Military Ball	150	9.70	2750	838	1
UL Level 6	9mm FMJ with Lead Core	124	8	1400	427	5
UL Level 7	5.56 Rifle Lead Core FMJ	55	3.56	3080	939	5
UL Level 8	7.62mm Rifle Lead Core FMJ Military Ball	150	9.70	2750	838	5

Recommended Hardware Preparation

Lock: Grade A Mortised Lock, Rim Device, or Surface Rod
Hinge: Markar FS3501, FS3502, HG3505

Heavy duty door closer's recommended.
For additional hardware consult with manufacturer.

06/9/26