

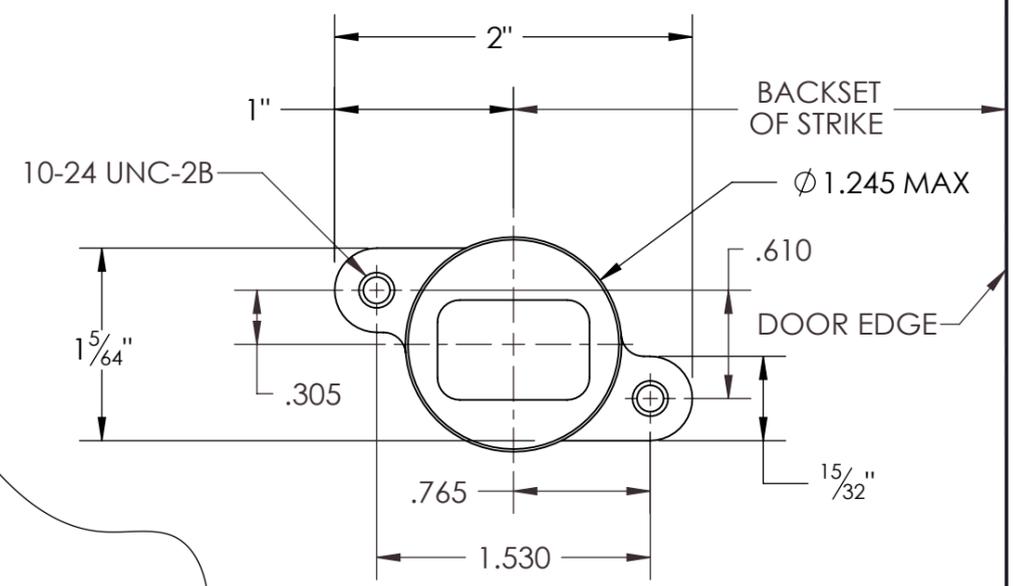



USE THIS DIMENSION WHEN DOOR STOPS AGAINST FRAME AS ILLUSTRATED. IF DOOR SILENCERS (RUBBER OR FELT BUMPERS) DOOR PANELS OR BOTH ARE USED, INCREASE THIS DIMENSION ACCORDINGLY.

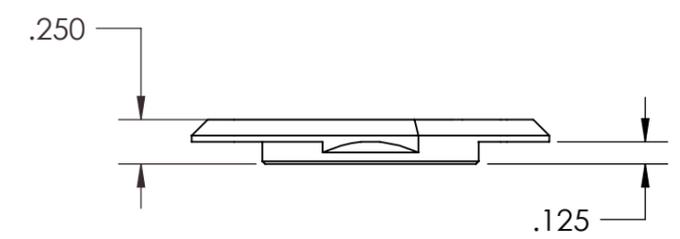

NOTE:  
MAX BACKSET OF DEVICE IS 2-3/4"  
STRIKE IS CENTERED ON LATCHBOLT ±1/8"  
FOR ALL DEVICE BACKSETS.  
SEE HEADER DETAILS AT LEFT FOR MINIMUM  
BACKSET INFORMATION.

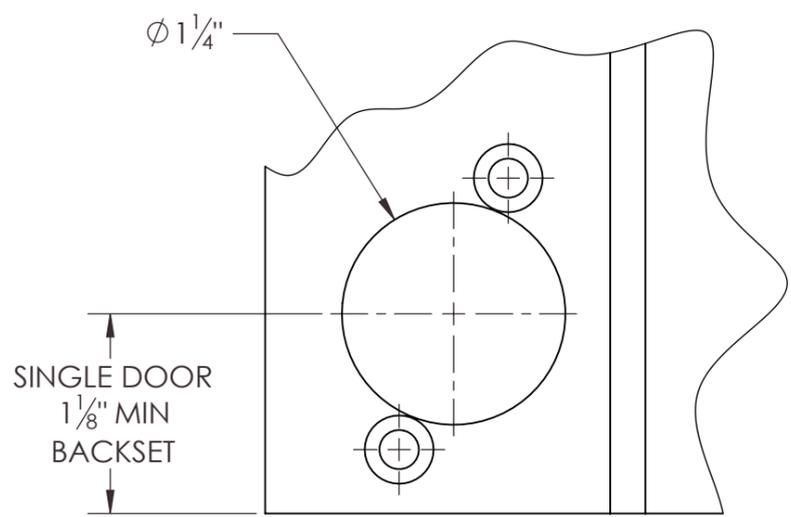

DOUBLE DOOR  
1 7/8" MIN  
(7/8 MIN BACKSET)

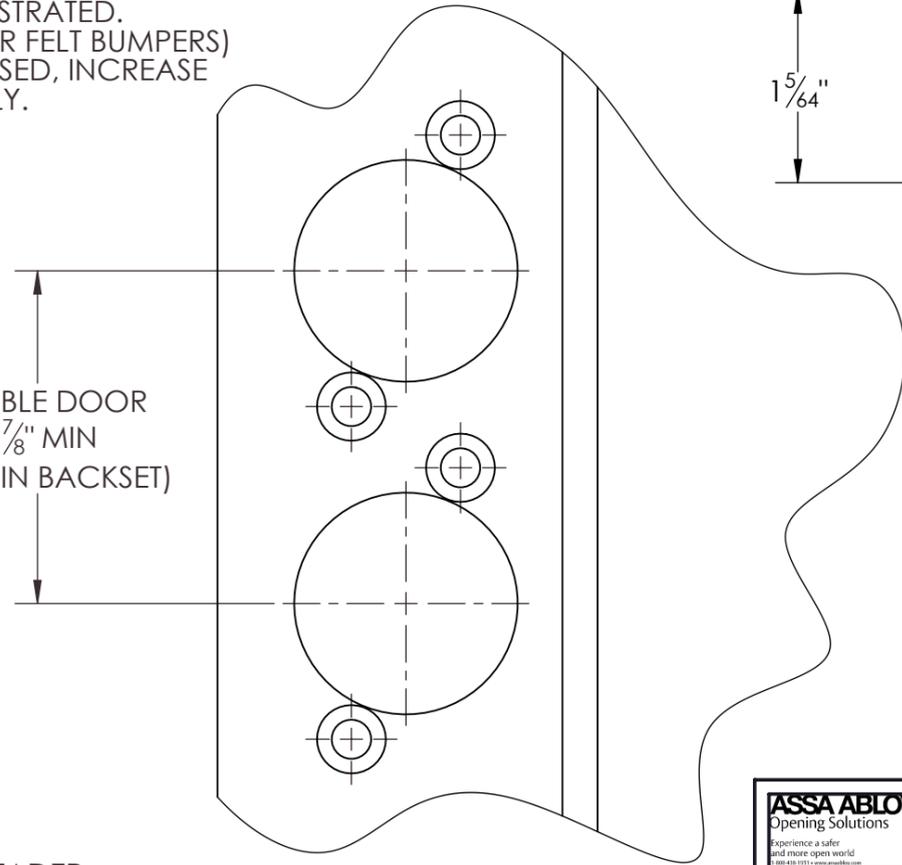

- NOTES:
1. FOR BOTTOM STRIKE, PREPARE THRESHOLD AS SPECIFIED FOR FRAME HEADER.
  2. TOLERANCE ON ALL DIMENSIONS ±.015 (1/64") UNLESS OTHERWISE SPECIFIED.

<b>ASSA ABLOY</b> Opening Solutions <small>Experience a safer and more open world</small> <small>1-800-433-1111 • www.assaabloy.com</small>	
DOOR MANUFACTURERS' TEMPLATE 640 TOP STRIKE FOR NARROW CVR EXIT DEVICES	RELEASE DATE 4/19/22 TEMPLATE NO. MEDT6