






USE THIS DIMENSION WHEN DOOR  
STOPS AGAINST FRAME AS ILLUSTRATED.  
IF DOOR SILENCERS (RUBBER BUMPERS),  
DOOR PANELS OR BOTH ARE USED INCREASE  
THIS DIMENSION ACCORDINGLY.

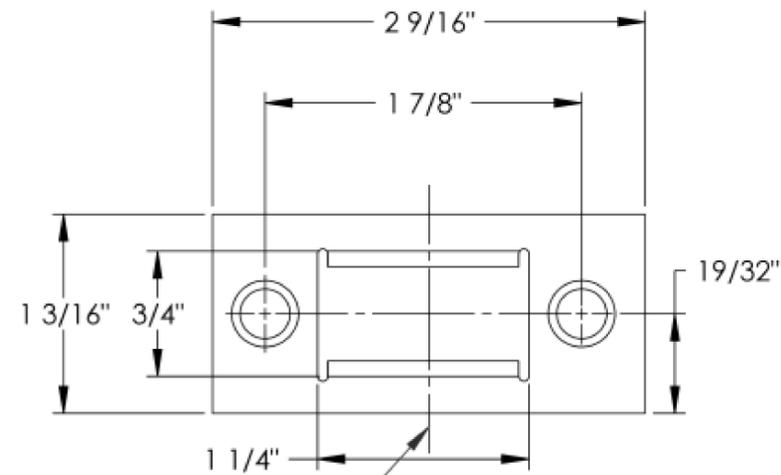

1. IF DEVICE BACKSET IS 1-5/8" OR MORE THAN STRIKE IS CENTERED ON BOLT.
2. IF DEVICE BACKSET IS LESS THAN 1-5/8" TO 1-1/8" THAN STRIKE IS CENTERED AT 1-3/8" BACKSET
3. IF DEVICE BACKSET IS LESS THAN 1-1/8" THIS STRIKE CAN NOT BE USED. CONSULT FACTORY FOR ALTERNATE STRIKE.

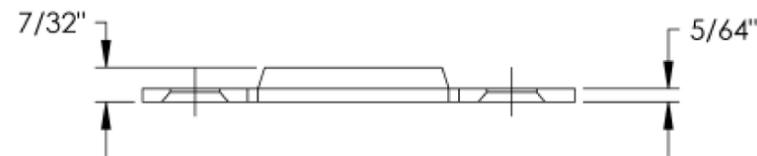

#650 TOP STRIKE  
OR #652 TOP AND  
BOTTOM STRIKES

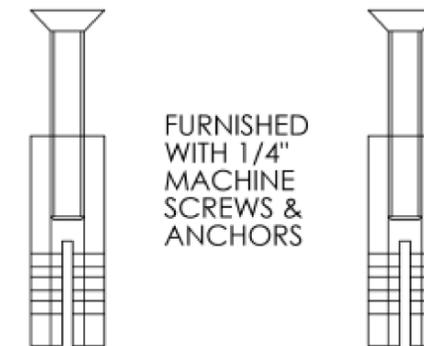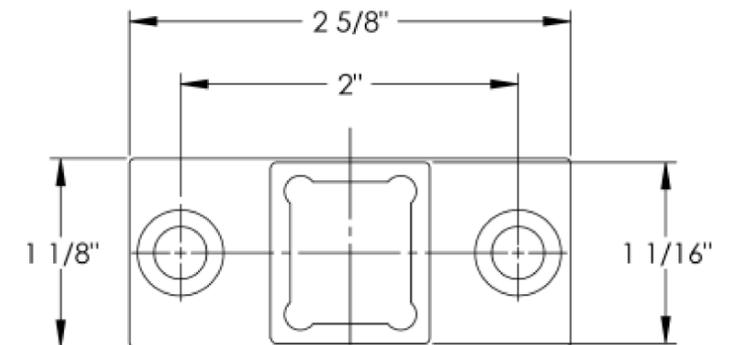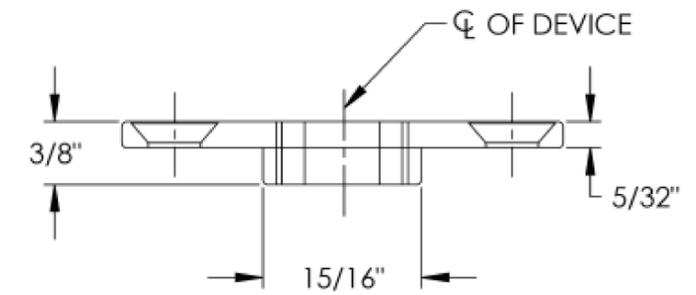

#606 BOTTOM STRIKE

NOTES:

1. OUTSIDE DIMENSIONS ARE MAX PART SIZE.
2. STANDARD BACKSET AND MAXIMUM BACKSET ARE 2-3/4"
3. MINIMUM BACKSET DEPENDS ON DEVICE AND APPLICATION, SEE DEVICE TEMPLATE FOR MINIMUM BACKSET

**ASSA ABLOY**  
Opening Solutions  
Experience a safer  
and more open world.

DOOR MANUFACTURER TEMPLATE:  
STRIKES FOR CONCEALED VERTICAL ROD  
EXIT DEVICES AND LOCKS

RELEASE DATE  
5/17/22  
TEMPLATE NO.  
MEDT9