
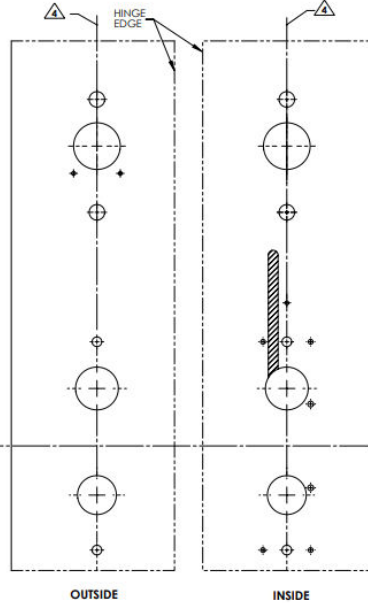
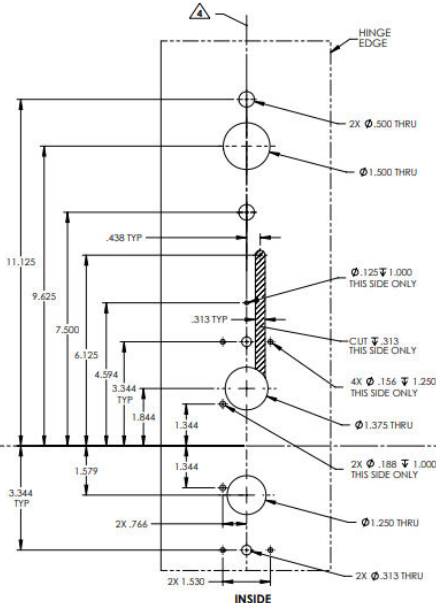



# WOOD DOOR

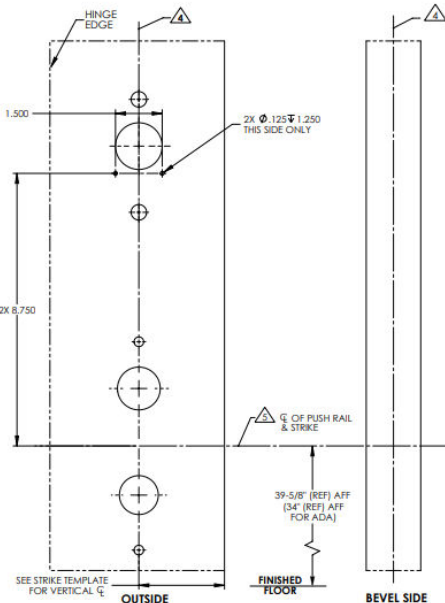

L.H.R.B. DOOR




R.H.R.B. DOOR

- NOTES:
1. DRAWING IS NOT TO SCALE.
  2. REFERENCE STRIKE TEMPLATE FOR DETAILS TO PREPARE FRAME.
  3. FOR ELECTROLYNIX APPLICATIONS, REFER TO MCKINNEY TRANSFER DEVICE CATALOG.
  4. VERTICAL CENTERLINE IS REFERENCED FROM THE CENTERLINE OF THE BEVEL. (INDUSTRY STANDARD BEVEL IS 1/8 INCH IN 2 INCHES.)
  5. CONSULT THE AUTHORITY HAVING JURISDICTION (AHJ) TO VERIFY THE RECOMMENDED MOUNTING HEIGHT ABOVE THE FINISHED FLOOR (AFF). LIMITATIONS IN THE DOOR CONSTRUCTION PROCESS MAY REQUIRE SOME HOLES TO BE FIELD-LOCATED USING THE PHYSICAL PART AS A TEMPLATE.
  6. STANDARD TOLERANCE OF  $\pm .015$  APPLIES TO ALL DOOR PREPARATION REQUIREMENTS, UNLESS OTHERWISE SPECIFIED.
  7. DOOR REINFORCEMENT IS RECOMMENDED TO IMPROVE (SURFACE MOUNTED) FASTENER HOLDING POWER AND CRUSH RESISTANCE (WHEN THRU-BOLTING IS EMPLOYED). CONSTRUCTION TECHNIQUES SHOULD REFLECT INDUSTRY BEST PRACTICES (I.E. WDMA, SDI) AND AUTHORIZED METHODS WHERE LABEL SERVICE (I.E. UL, W-HI) IS IN EFFECT.
  8. WIRE RACEWAY AREAS SHOULD BE FREE OF OBSTRUCTIONS & SHARP EDGES TO PROTECT WIRES FROM CUTS & ABRASIONS.
  9. CAREFULLY NOTE WHICH FEATURES ARE OPTIONAL. (WHETHER THE FEATURE APPLIES TO BOTH SIDES OF THE DOOR AND/OR IF A DEPTH APPLIES.)
  10. MAXIMUM PRODUCT DIMENSIONS ARE SHOWN FOR THE PURPOSE OF VERIFYING FITMENT WITH DOOR FRAME STOPS, DOOR STYLE SIZE & LIGHT/COVER KITS.
  11. NARROW SCOUT-CHON SHOWN, IF OPTIONAL LEVERS OR ROSES ARE USED REFERENCE THE RELATED PRODUCT DIMENSIONS TO VERIFY THE FITMENT REQUIREMENTS.

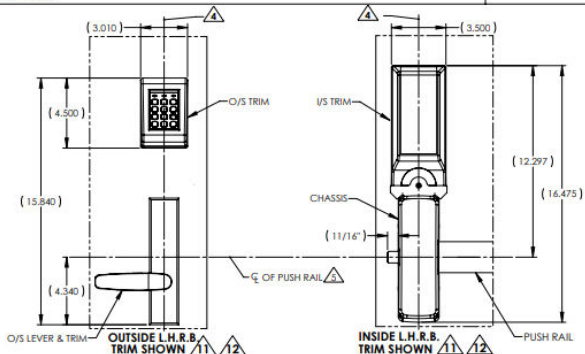

| AUTHORIZED OPTIONS           |              |
|------------------------------|--------------|
| KP                           |              |
| BACKSET DEFINITION           | DOOR HANDING |
|                              |              |
| ASSA ABLOY                   |              |
| DOOR MANUFACTURERS TEMPLATE: |              |
| KP SERIES                    | RELEASE DATE |
| WOOD DOOR                    | 07/29/22     |
| RIM DEVICE                   | TEMPLATE NO. |
|                              | MEDTSB       |
| SHEET 2 OF 2                 |              |


# METAL DOOR

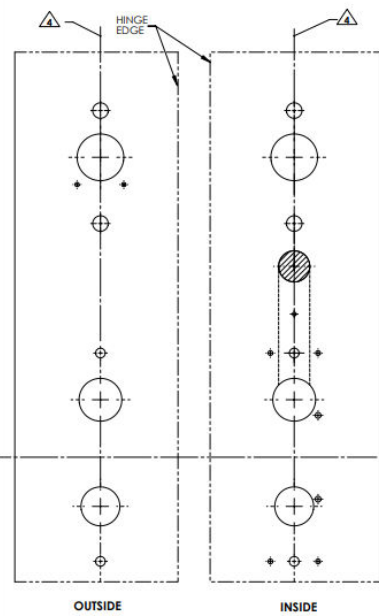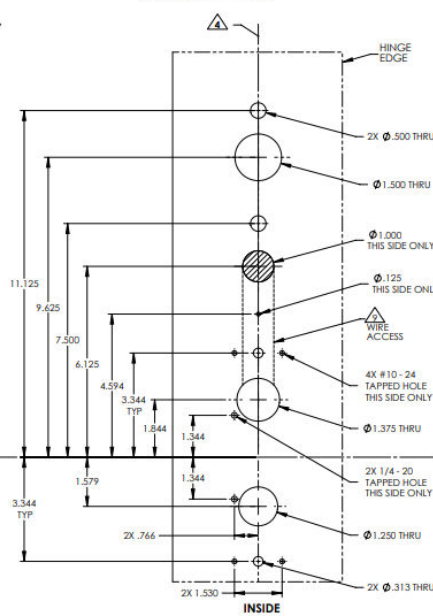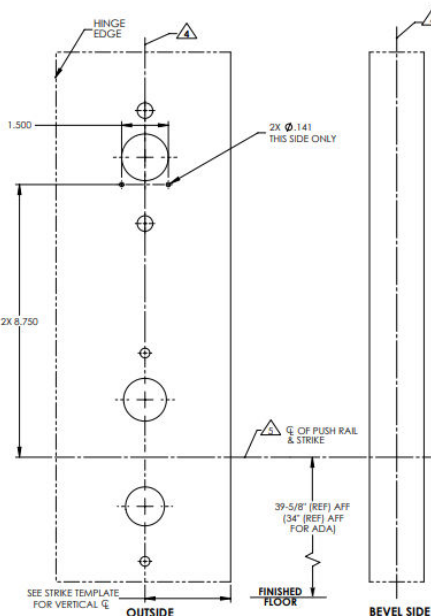

L.H.R.B. DOOR

R.H.R.B. DOOR

- NOTES:
- DRAWING IS NOT TO SCALE.
  - REFERENCE STRIKE TEMPLATE FOR DETAILS TO PREPARE FRAME.
  - FOR ELECTROLYNX APPLICATIONS, REFER TO MCKINNEY TRANSFER DEVICE CATALOG.
  - VERTICAL CENTERLINE IS REFERENCED FROM THE CENTERLINE OF THE BEVEL. (INDUSTRY STANDARD BEVEL IS 1/8 INCH IN 2 INCHES.)
  - CONSULT THE AUTHORITY HAVING JURISDICTION (AHJ) TO VERIFY THE RECOMMENDED MOUNTING HEIGHT ABOVE THE FINISHED FLOOR (AFF). LIMITATIONS IN THE DOOR CONSTRUCTION PROCESS MAY REQUIRE SOME HOLES TO BE FIELD-LOCATED USING THE PHYSICAL PART AS A TEMPLATE.
  - STANDARD TOLERANCE OF  $\pm .015$  APPLIES TO ALL DOOR PREPARATION REQUIREMENTS, UNLESS OTHERWISE SPECIFIED.
  - DOOR REINFORCEMENT IS RECOMMENDED TO IMPROVE (SURFACE MOUNTED) FASTENER HOLDING POWER AND CRUSH RESISTANCE (WHEN THRU-BOLTING IS EMPLOYED). CONSTRUCTION TECHNIQUES SHOULD REFLECT INDUSTRY BEST PRACTICES (I.E. WDM, SDI) AND AUTHORIZED METHODS WHERE LABEL SERVICE (I.E. UL, W-H) IS IN EFFECT.
  - WIRE RACEWAY AREAS SHOULD BE FREE OF OBSTRUCTIONS & SHARP EDGES TO PROTECT WIRES FROM CUTS & ABRASIONS.
  - CAREFULLY NOTE WHICH FEATURES ARE OPTIONAL. (WHETHER THE FEATURE APPLIES TO BOTH SIDES OF THE DOOR AND/OR IF A DEPTH APPLIES.)
  - MAXIMUM PRODUCT DIMENSIONS ARE SHOWN FOR THE PURPOSE OF VERIFYING FITMENT WITH DOOR FRAME STOPS, DOOR STYLE SIZE & LIGHT/LOUVER KITS.
  - NARROW ESCUTCHEON SHOWN, IF OPTIONAL LEVERS OR ROSES ARE USED REFERENCE THE RELATED PRODUCT DIMENSIONS TO VERIFY THE FITMENT REQUIREMENTS.

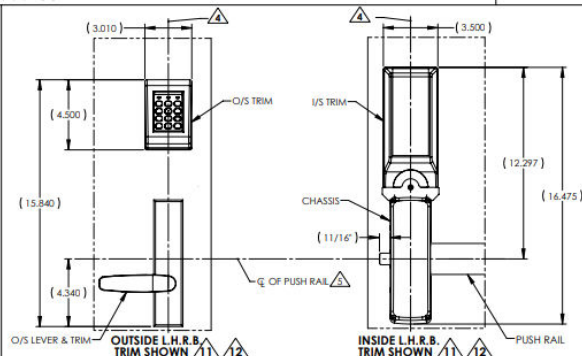

AUTHORIZED OPTIONS  
KP

| BACKSET DEFINITION |      | DOOR HANDING |      |
|--------------------|------|--------------|------|
|                    | L.H. | INSIDE       | R.H. |
|                    |      | OUTSIDE      |      |
|                    | R.H. | INSIDE       | L.H. |
|                    |      | OUTSIDE      | R.H. |

|                              |  |              |  |
|------------------------------|--|--------------|--|
| ASSAULT                      |  | RELEASE DATE |  |
| DOOR MANUFACTURERS TEMPLATE: |  | 07/29/22     |  |
| KP SERIES                    |  | TEMPLATE NO. |  |
| METAL DOOR                   |  | MEDT5B       |  |
| RIM DEVICE                   |  | SHEET 1 OF 2 |  |