


ESK-9100-STOREFRONT (MS)-SWING4 Single Electric Strike for Storefront Medium Stile Doors Swing 4

Experience a safer
and more open world

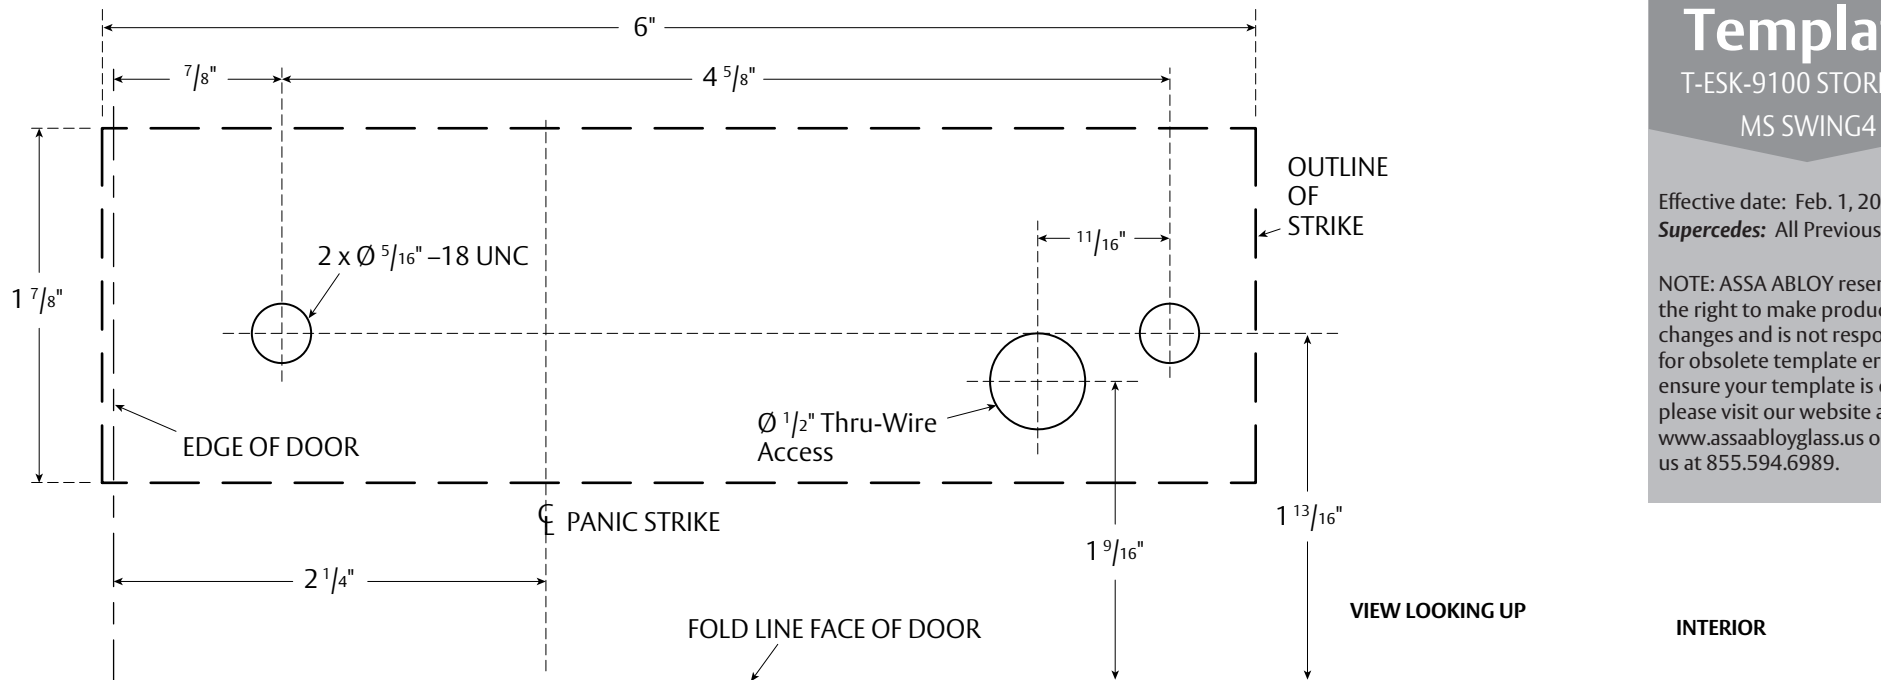

Notes:

1. Allowable distance from edge of door to centerline of strike is 2 1/4", consult factory. If distance to centerline is different.
2. View is from bottom of header.
3. Prep shown is for medium stile storefront doors only, stile widths less than 5".
4. Backing plate of 12 ga. min. required in header for strike installation.
5. 5/16"-18 fasteners provided.
6. For headers less than or equal to 5 1/4" wide, cover is required by others to conceal a portion of electric strike.

PRINT AT 1:1 SCALE. VERIFY MEASUREMENTS AFTER PRINTING BEFORE USING THIS AS A TEMPLATE.

Template

T-ESK-9100 STORFRNT
MS SWING4

Effective date: Feb. 1, 2024
Supersedes: All Previous

NOTE: ASSA ABLOY reserves the right to make product changes and is not responsible for obsolete template errors. To ensure your template is current, please visit our website at www.assaabloyglass.us or call us at 855.594.6989.