




The Exit Locking System Which Deadbolts Both Sides Of The Door

Code-Compliant Single-Motion Exiting

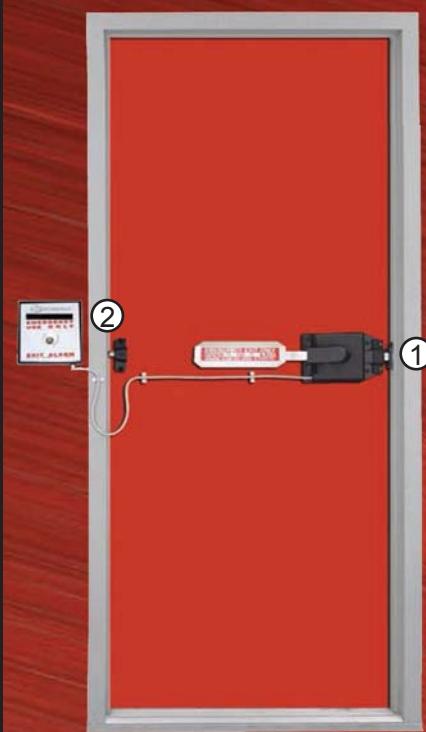

- 2-Point Deadbolt Locking
Not a latch
- Oversize Stainless Steel Deadbolt
1" Throw
- Easy Installation
Full-size steel marking template
- Exterior Stainless Steel Anti-Pry Plate
Protection against attack

Glass Door Kit (SEL-GK2)



- Thru-Bolt Installation
Added resistance to prying
- Wall-Mounted Alarm Option
Protected against weather & delivery carts
- Full Range of Alarm & Entry Options
- *Battery, Direct Power, Signal Output, Keyed Entry, Access Control*

Double Door Kit (SEL-IAL)



Mounting kit for storefront glass doors. Designed for aluminum doors 34" or 36" wide. Plate mounts across the narrow stile aluminum door and is thru-bolted to allow installation.

For double door protection, upgrade to a SEL-IAL. The SEL-IAL locks the inactive leaf of a double door configuration. It combines a key activated 2-point vertical bolt lock and double door strike kit (SEL-DDA)

ELEMENTS



DESCRIPTIONS

A10 Keyed battery alarm with 9 Volt battery, twin piezo sirens & low battery alert.	A20 Combines SEL-A10 and hardwired direct power supply	SSO Signal switch only. Provides dry contact for use by others.	CT Digital Counter; add designation after model number. Alarm models only.	PT1 Direct power plug-in transformer upgrade kit for SEL-100 models.	MTT Cylinder & Thumtturn for use with SEL-200 models. Not used.	KLT Cylinder & Lever for use with SEL-200 models. Not used with SEL-100.
---	--	---	--	--	---	--

MODELS	SEL-100	Manual Locking; Without Alarm
	SEL-110	Manual Locking; Includes SEL-A10 Battery Alarm
	SEL-120	Manual Locking; Includes SEL-A20 Direct Power Alarm
	SEL-200	Self-Rlocking; Without Alarm
	SEL-210	Self-Rlocking; Includes SEL-A10 Battery Alarm
	SEL-220	Self-Rlocking; Includes SEL-A20 Direct Power Alarm
		[]
PARTS & OPTIONS	SEL-GK2	Glass Door Kit; For Aluminum Doors 34" Or 36" Wide
	SEL-IAL	Key-Activated 2-Point Vertical Bolt Lock For Inactive Leaf & Double Door Strike Kit
	SEL-DDA	Double Door Strike For Doors Not Using SEL-IAL
	SEL-A10	Keyed Battery Alarm With 9 Volt Battery
	SEL-A20	Hardwired Direct Power Alarm
	SEL-SSO	Signal Switch Only With Cable
	SEL-AM1	Battery Alarm; Armored Cable; Integral Key Switch; Door Monitor Switch
	SEL-AM2	Direct Power Alarm; Armored Cable; Integral Key Switch; Door Monitor Switch
	SEL-PS2	Direct Power Supply For Use With A20
	SEL-PT1	Direct Power Plug-In
	SEL-MTT	Cylinder & Thumturn; For Both Series
	SEL-MDT	Cylinder & Thumturn; For Both Series; Electric, 24vDC Required
	SEL-KLT	Mechanical Lever Trim; For SEL-200 Models (Specify handing)
	SEL-KDT	Electric Lever Trim; For SEL-200 Models; Electric, 24vDC Required (specify handing)
	-CT	Digital Counter (add designation after model number) Alarm models only.
	-CW	Concealed Wire From Switch Into Door (8' Leads)
		[]

Deadbolt Protection Against Break-Ins

Solid deadbolt assembly

Protection Against Hinge-Side Attack

Deadbolt provided to resist hinge-removal break-in

Superior Anti-Pry Installation

Thru-bolting & anti-pry plate are standard

Customizable To Meet Security & Operational Needs

Wide range of available alarms & options

Use On Steel, Wood Or Aluminum Doors

Special kit for mounting on glass doors

Easy Installation Without Special Kits

Lock fits all width doors with no special kits needed

Alarms Resist Damage By Moving Carts, Etc.

Wall-mounted alarms ideal for high delivery areas
Keeps sound inside where needed

Battery Alarms May Be Added Or Upgraded As Needed

Direct power upgrade kit available

Modular Configurations

Choose exterior option which meets your needs
(may not be available for glass doors)

Rugged Design, Ideal For Back-Of-House Doors

Stamped steel, not die cast, lock housing

APPLICATIONS:

Emergency Exit Doors

Receiving Doors

Emergency Exit Glass Doors (SEL-GK2 kit)

Doors Leading To Fire Corridors

POPULAR MODELS & KITS:

SEL-100	Manual locking model; no alarm
SEL-110	Manual locking model; with battery alarm (SEL-A10)
SEL-200	Self-relocking model; no alarm
SEL-210	Self-relocking model; with battery alarm (SEL-A10)
SEL-GK2	Glass door kit; for aluminum doors 34" or 36" wide