


# Rockwood 585-36

## 36" Surface Bolt

Experience a safer  
and more open world

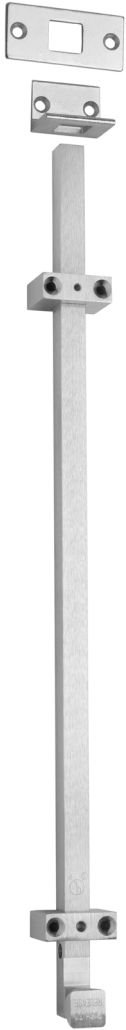

### SPECIFICATIONS:

**MATERIAL:**  
Steel

#### FASTENERS:

**Bolt:** 4 ea. 1/4"-20 x 2 1/4" Flat Head Machine Screws; 4 ea. 1/4"-20 x 1 5/8" Sex Bolts

**Strikes:** 2 ea. #14 x 2 1/2" Flat Head Sheet Metal Screws, 2 ea. Plastic Anchors;

2 ea. 1/4"-20 x 1" Flat Head Machine Screws, 2 ea. 1/4"-20 Anchors

#### FEATURES:

- Includes a universal top strike and a mortise bottom strike
- Locks in both the up and down position
- Bolt locks automatically when thrown; can be released only by pressing knob toward door while retracting
- Can be used on any type of door
- Accommodates padlock

### AVAILABLE FINISHES:

- 10BE
- US26D/626
- BSP (Black Suede Powder Coat)
- BPC (Black Powder Coat)
- FBPC (Flat Black Powder Coat)
- WSP (White Suede Powder Coat)
- WPC (White Powder Coat)
- 314E
- 315E
- RPC
- Stock Powder Coats

#### Size:

Bolt Throw: 1 1/4"

Bolt Material: 3/4" x 3/4"

Bolt Length: 36"

**Weight:** 8.3 lbs.

**ANSI A156.16:** L04161

## **WARNING**

This product can expose you to lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65warnings.ca.gov](http://www.P65warnings.ca.gov).

Rockwood Manufacturing Company  
300 Main St.  
Rockwood, PA 15557  
[www.rockwoodmfg.com](http://www.rockwoodmfg.com)  
1 800 458 2424

Copyright © 2024, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited. Printed in the U.S.A.