



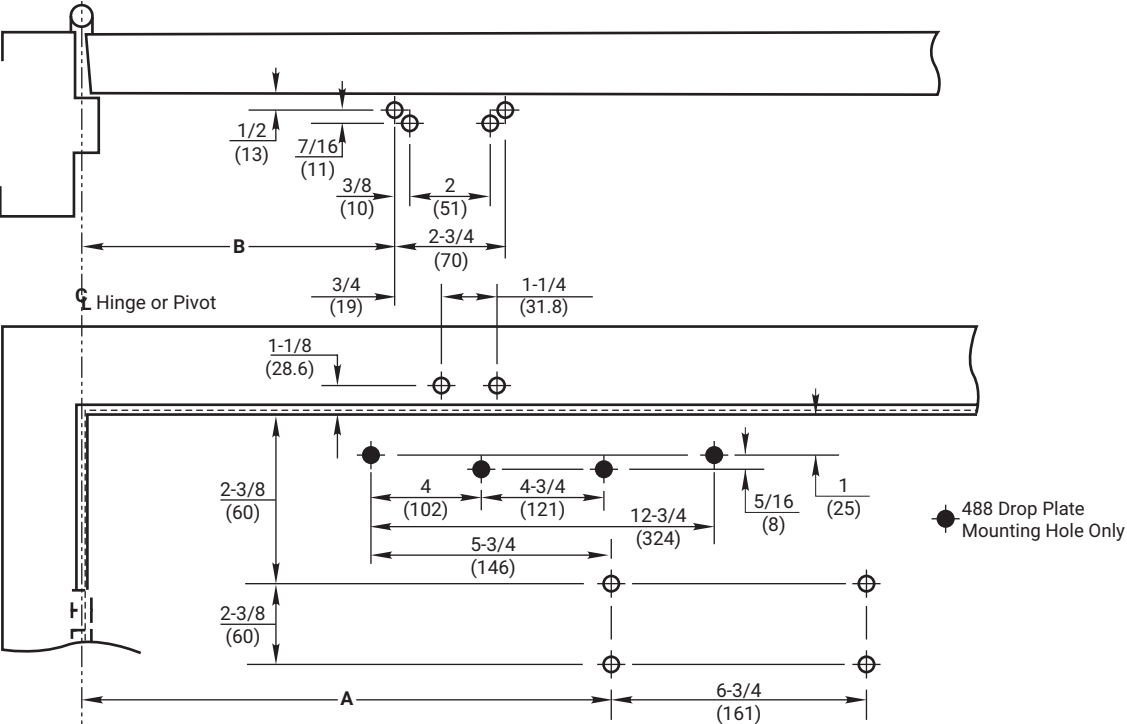

Standard Mount

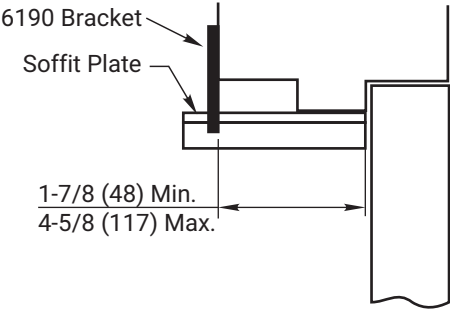

- NOTES:**
- Do not scale drawing.
 - Left hand door shown.
 - Dimensions are given in inches (mm).
 - Hollow-metal doors require channel or box-type reinforcement.

Door Opening Angle		Dimensions*			
Hold Open **	Dead Stop	Butts and Offset Pivots		Center Pivots	
		Dim. A	Dim. B	Dim. A	Dim. B
85°	90°	10-1/4 (260)	10-1/2 (267)	11-1/4 (286)	11-1/2 (292)
90°	95°	9-5/8 (244)	9-7/8 (251)	10-1/2 (267)	10-3/4 (273)
95°	100°	9-1/8 (232)	9-3/8 (238)	10 (254)	10-1/4 (260)
100°	105°	8-3/4 (222)	9 (229)	9-1/2 (241)	9-3/4 (248)
105°	110°	8-3/8 (213)	8-5/8 (219)	9-1/8 (232)	9-3/8 (238)
110°	115°	8 (203)	8-1/4 (210)	8-3/4 (222)	9 (229)
* "A" and "B" dimensions measured from centerline of hinge or pivot.					
** Door must be free to swing up to 5° beyond hold open position.					

Preparation for Fasteners			
Fasteners	To Apply	Door or Frame	Drill Sizes
Sex nuts and bolts	Closer Drop-Plate	Hollow-Metal	9/32" (7.00mm) through 3/8" (9.50mm) door-face opposite to closer
		Aluminum or Wood	3/8" (9.50mm) through
#14 x 1/4" (32mm) type "A" S.M. screw	Soffit-plate 6190 Bracket	Wood	3/16" (4.30mm)
1/4-20 machine screw		Metal	drill: #7 (.201" dia.) tap: 1/4-20
Thru bolts and grommet nuts	Optional	All	9/32" (7.00mm) through; 3/8" (9.50mm) dia. x 3/8" (10mm) deep, door face opposite to closer

4400 Series Door Closer
Models UNI4400, UNI4410 With or Without 488 Drop Plate
Non-Hold Open or Hold Open; UNI Stop™ Parallel Arm, With 6190 Bracket
Doors 28" - 32" (0.70-0.80m) Wide

ACCENTRA
ASSA ABLOY

TEMPLATE NUMBER	REV	DATE
7344-1351	2	05/24