


McKinney CSS-9

Combination Strike & Stop for  
Center Hung Doors with Mortise Lock

DO NOT SCALE  
DIMENSIONS: INCHES (MM)

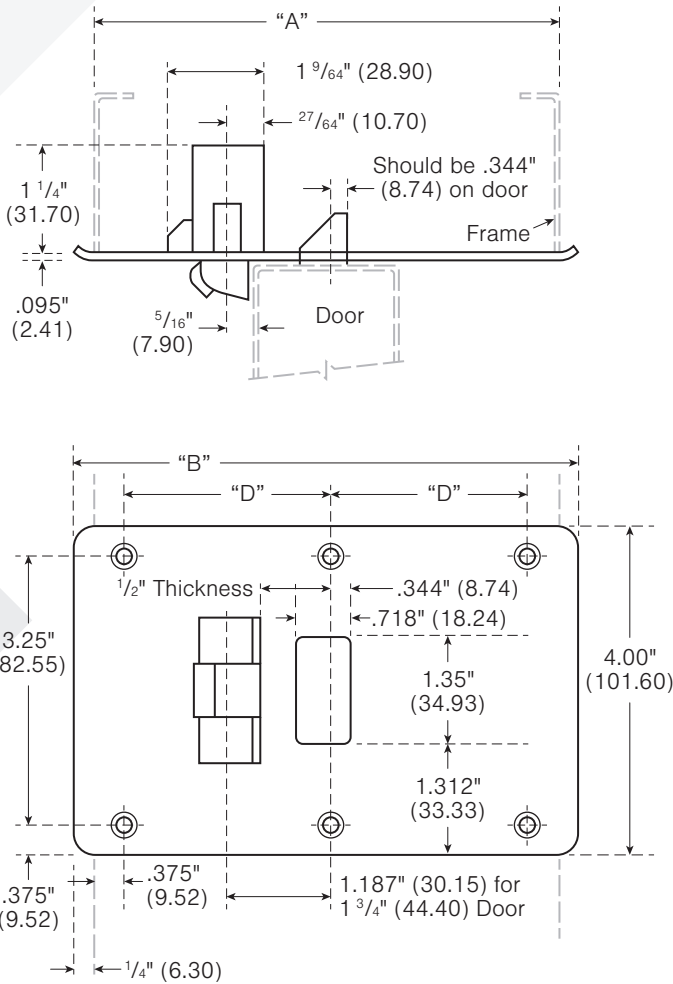

| "A" FRAME SIZE  | "B" (REF.)        | "D"             |
|-----------------|-------------------|-----------------|
| 4 3/4" (120.60) | 5 5/16" (134.9)   | 2.000" (50.80)  |
| 5 5/8" (142.90) | 6 3/16" (157.20)  | 2.437" (61.91)  |
| 5 3/4" (146.00) | 6 5/16" (160.30)  | 2.500" (63.50)  |
| 5 7/8" (149.20) | 6 7/16" (163.50)  | 2.562" (65.09)  |
| 6 1/4" (158.70) | 6 13/16" (173.00) | 2.750" (69.85)  |
| 6 3/4" (171.40) | 7 5/16" (185.70)  | 3.000" (76.20)  |
| 7 1/8" (180.90) | 7 11/16" (195.30) | 3.187" (80.96)  |
| 7 3/4" (196.80) | 8 5/16" (211.10)  | 3.500" (88.90)  |
| 8 1/4" (209.50) | 8 13/16" (223.80) | 3.750" (95.25)  |
| 8 3/4" (222.20) | 9 5/16" (236.50)  | 4.000" (101.60) |

TEMPLATE 55419

EFFECTIVE DATE:  
September 1, 2023

SUPERSEDES:  
All Previous

McKinney Template Combination Strike and Stop for center hung doors are made to conform to this drawing.

MACHINE SCREW SIZE:  
1/2 x 8-32 F.H.

WOOD SCREW SIZE:  
3/4 x 8 F.H.

\*\*McKinneyCSS-9 for MORTISE LOCK is designed for use with the following mortise locks:

- Sargent 7900 and 8200 (no deadbolt function)
- Corbin Russwin ML2000 (no deadbolt function)
- Yale 8800 (no deadbolt function)