



# McKinney CSS-9

## Combination Strike & Stop For Center Hung Doors

Experience a safer  
and more open world

DO NOT SCALE

DIMENSIONS: INCHES (MM)

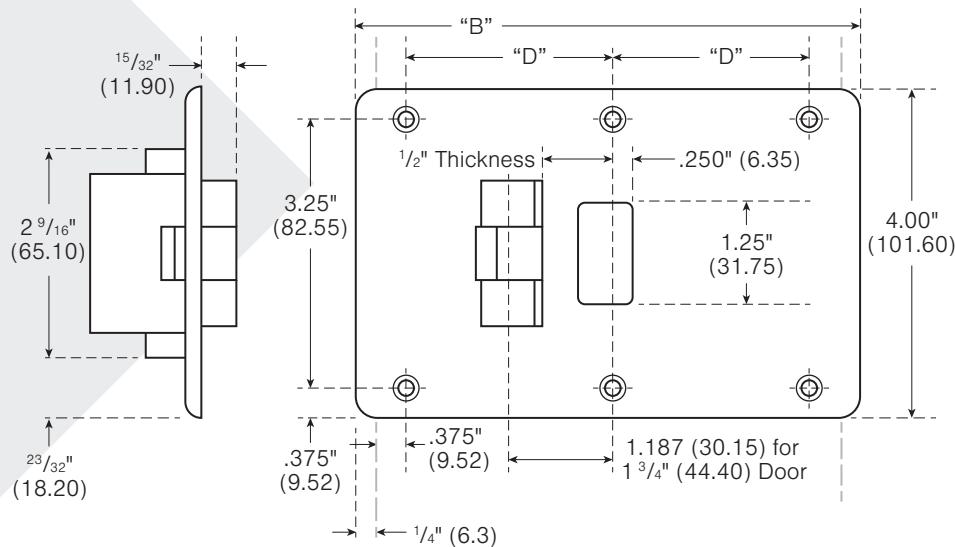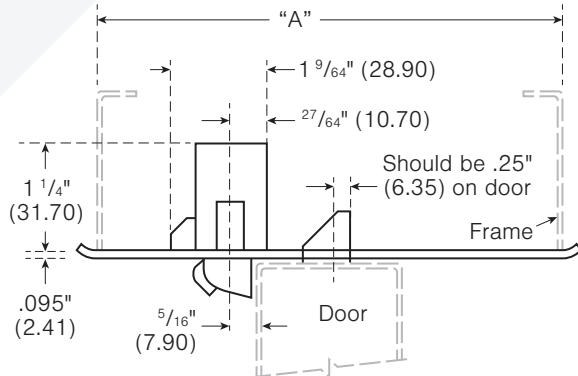

"A" FRAME SIZE	"B" (REF.)	"D"
4 3/4" (120.60)	5 5/16" (134.9)	2.000" (50.80)
5 5/8" (142.90)	6 3/16" (157.20)	2.437" (61.91)
5 3/4" (146.00)	6 5/16" (160.30)	2.500" (63.50)
5 7/8" (149.20)	6 7/16" (163.50)	2.562" (65.09)
6 1/4" (158.70)	6 13/16" (173.00)	2.750" (69.85)
6 3/4" (171.40)	7 5/16" (185.70)	3.000" (76.20)
7 1/8" (180.90)	7 11/16" (195.30)	3.187" (80.96)
7 3/4" (196.80)	8 5/16" (211.10)	3.500" (88.90)
8 1/4" (209.50)	8 13/16" (223.80)	3.750" (95.25)
8 3/4" (222.20)	9 5/16" (236.50)	4.000" (101.60)

### TEMPLATE 55421

#### EFFECTIVE DATE:

September 1, 2023

#### SUPERSEDES:

All Previous

McKinney Template Combination Strike and Stop for center hung doors are made to conform to this drawing.

#### MACHINE SCREW SIZE:

1/2 x 8-32 F.H.

#### WOOD SCREW SIZE:

3/4 x 8 F.H.

\*\*McKinney CSS-9 is designed for use with cylindrical bored lock sets and may not work properly with some mortise locks. Consult factory for mortise lock applications.