

PEMKOHINGE® CONTINUOUS GEARED HINGES:

Standard Duty and HD1 Full Mortise-Kawneer 3" Between Bearing Centers

K_FM



LISTED
DOOR HINGE
76Y2

BHMA
CERTIFIED

AVAILABLE FINISHES:
C, D, SN, BSP, WSP

WIDTH: **5/16" (7.9 mm)**
(between frame edge and door edge)

CAP WIDTH: **25/32" (19.8 mm)**

HEIGHT: **1 19/32" (40.5 mm)**
(to flange/frame edge side)

HEIGHT: **3/4" (19.1 mm)**
(frame edge side flange to top of cap)


C (Clear Anodized)

D (Dark Bronze Anodized)

SN (Satin Nickel Powder Coat)

BSP (Black Suede Powder Coat)

WSP (White Suede Powder Coat)

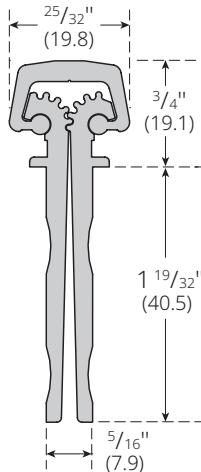

Experience a safer
and more open world

TITLE:

PREPARED FOR:

PREPARED BY:

DATE:

COMMENTS: