

MODEL #	DESCRIPTION
<b>1) SINGLE DOOR APPLICATIONS</b>	
TEL-100	Manual-relocking, no alarm
TEL-110	Manual-relocking packed with battery alarm
TEL-1120	Manual-relocking packed with direct power alarm
TEL-200	Self-relocking, no alarm
TEL-210	Self-relocking packed with battery alarm
TEL-220	Self-relocking packed with direct power alarm
TEL-200F	Self-relocking, FIRE RATED, no alarm
TEL-210F	Self-relocking, FIRE RATED with battery alarm
TEL-220F	Self-relocking, FIRE RATED with direct power alarm
<b>2) DELAYED EGRESS SYSTEM</b>	
TEL-DES	Trident self-locking + delayed egress system (TEL-200 Included)
TEL-DES-KLST (-HAND)	Trident self-locking + delayed egress system (TEL-200 Included) with keyed lever trim & delayed egress shunt switch
TEL-DES-KDST (-HAND)	Trident self-locking + delayed egress system (TEL-200 Included) with 24vDC keyed lever trim & delayed egress shunt switch
Delayed Egress System	
TEL-DEK	Delayed egress kit (Does not include Trident lock)
<b>3A) PAIR OF DOORS APPLICATION: KIT, ONE ACTIVE DOOR, &amp; ONE INACTIVE DOOR</b>	
TEL-IAL	Inactive door package used with above single door locks. Includes double door aluminum angle bracket & 3-point keyed lock for inactive door only. Includes removable-core rim cylinder for 3-point keyed lock. Not for use where both doors need to be active.
TEL-IAT	Same as above but with a thumbturn on the interior mechanism
Pair doors application with mullion	
Use 2 TEL-100s or TEL-200s (one for each door)	
<b>3B) PAIR OF DOOR APPLICATIONS - BOTH DOORS ACTIVE</b>	
TEL-300	Manual-relocking, both doors active, no alarm
TEL-310	Manual-relocking, both doors active, packed with battery alarm
TEL-320	Manual-relocking, both doors active, packed with direct power alarm
TEL-400	Self-relocking, both doors active, no alarm
TEL-410	Self-relocking, both doors active, packed with battery alarm
TEL-420	Self-relocking, both doors active, packed with direct power alarm
TEL-400F	Self-relocking, FIRE RATED, both doors active, no alarm
TEL-410F	Self-relocking, FIRE RATED, both doors active w/ battery alarm
TEL-420F	Self-relocking, FIRE RATED, both doors active w/ direct power alarm
<b>4) ALARM KITS (with security snap connector)</b>	
TEL-A10	Battery alarm kit for use with all Tridents
TEL-A20	Direct power alarm kit for use with all Tridents
TEL-A10-LDO-RK-TCH4W	Trident battery alarm with last door out feature & exterior shunt. Used with the TEL-KDST lever trim. Power transfer included

# TRIDENT™

## Multi-Point Exit Lock



# ASSA ABLOY

MODEL #	DESCRIPTION
<b>1) EXTERIOR ENTRY OPTIONS (CAN BE ADDED IN FIELD)</b>	
Trim for manual locking Tridents on full anti-pry plate for exterior trim models, 676 Finish (NON-HANDED)	
TEL-MTT-AP	Keyed thumbturn trim for TEL-100 series (cyl. by others)
TEL-MTH-AP	Keyed thumbturn trim & Pull handle for TEL-100 series (cyl. by others)
Trim for manual locking Tridents, on individual trim plate, black finish (NON-HANDED)	
TEL-MTT	Keyed thumbturn trim for TEL-100 series (cyl. by others)
TEL-MTH	Keyed thumbturn trim & pull handle for TEL-100 series (cyl. by others)
Trim for self-locking Tridents, on full anti-pry plate for exterior trim models, 630 finish (LHR / RHR)	
TEL-KLT-AP	Keyed lever trim for TEL-200 series (order handed)
TEL-KDT-AP	Keyed lever trim with 24 Volt DC release for TEL-200 (fail-secure)
TEL-KRT-AP	Keyed lever trim with 24 Volt DC release for TEL-200 (fail-safe)
Trim for self-locking Tridents, on individual trim plate, 630 finish (LHR / RHR)	
TEL-KLT	Keyed lever trim for TEL-200 series (order handed)
TEL-KDT	Keyed lever trim with 24 Volt DC release for TEL-200 (fail-secure)
TEL-KRT	Keyed lever trim with 24 Volt DC release for TEL-200 (fail-safe)
Trim for delayed egress models, on full anti-pry plate for exterior trim models, 630 finish (LHR / RHR)	
TEL-KLST	Keyed lever trim w/delayed egress shunt switch.
TEL-KDST	Keyed Lever trim, 24 Volt DC release w/delayed egress shunt switch.
<b>All Trident self-locking and delayed egress trim models are handed: designate -LHR or -RHR</b>	
<b>Cylinders for Trims or Alarms</b>	
TEL-MC1	Mortise cylinder standard keyway w/ operating keys, no special keying
TEL-RC1	Removable core mortise cylinder with change and operating keys
TEL-RC2	Removable core rim cylinder with change and operating keys
<b>CYLINDER and CAM Information</b>	
IAL	Removable core rim cylinder provided with IAL lockset (contact factory for others)
Alarms	Mortise cylinders (required w/ alarm - works with any cam); Order separately or by others
Trim	Mortise cylinders (required w/ trim - cloverleaf cam); Order separately or by others
<b>Custom functions and solutions available: please contact the factory</b>	
<b>Replacement (Service) Lever Trim Units</b>	
TEL-KLT-RB	Keyed lever trim only (676 finish); w/o anti-pry plate
TEL-KLT-RS	Keyed lever trim only (630 finish); w/o anti-pry plate
TEL-KDT-RB	Key / DC lever trim only (676 finish); w/o anti-pry plate
TEL-KDT-Rs	Key / DC lever trim only (630 finish); w/o anti-pry plate



**ALARM CYLINDER & CAM INFO**  
A10 & A20 Alarms will work with all mortise cylinder lengths and cams.

**TRIM CYLINDER & CAM INFO**  
Cloverleaf cam is recommended for one-hand operation on all outside entry options. Cylinder 1" or longer can be used.

**Important Cylinder & Cam Information:**  
Mortise cylinder for alarms & keyed entry options are provided, unless ordered as a separate item.



### CYLINDER USAGE CHART

Model	Type	Cam
<b>ALARMED MODELS</b>		
TEL-*00	None	n/a
TEL-*10	Mortise	Any
TEL-*20	Mortise	Any
<b>KEYED ENTRY MODELS</b>		
All	Mortise	Cloverleaf

# TRIDENT™

## Multi-Point Exit Lock



# ASSA ABLOY

MODEL #	DESCRIPTION
<b>6) POPULAR FIELD INSTALLED OPTIONS</b>	
TEL-HSB1	Additional hinge side bolt provides fifth point of locking
TEL-HSB3	HSB mounted on an extender plate to bypass f/s continuous hinge
TEL-E12	Armored alarm cable extension for oversize doors
TEL-EK12	12" upper extension for TEL-300 for over height doors
TEL-EP2	24" extended paddle with guarded rubber return
TEL-EP4	18" extended paddle, 6" filler plate and guarded rubber return
Option for shipping lock to lock installer and power supply to another (typically electrician)	
TEL-220-XPS	Self relocking Trident with direct power alarm less power supply
TEL-501	Separate power supply for above (shipped in own box)
Option for providing signal from lock for use with alarm by others	
TEL-SSO	Alarm cable for 3rd party alarms for doors up to 36"
TEL-SS5	Alarm cable for 3rd party alarms for doors up to 48"
TEL-ASO	Alarm cable for Securitech alarms for doors up to 36"
TEL-AS5	Alarm cable for Securitech alarms for doors up to 48"
TEL-PSK	PS2 power supply & board to upgrade A10 to direct power
TEL-SS53	Bolt monitor switch, armored cable & J Box. Doors up to 48"
Option for running electrified exterior trim wire across the door within armored cable	
TEL-TCH	Armored cable for electrified trim that includes alarm signal
TEL-TTH	Armored cable for electrified trim without alarm connector
For double door applications where inactive leaf lock provided by others	
TEL-DDA	Double door aluminum angle bracket (no lock included)
<b>Additional Options</b>	
TEL-EP1	24" Extended paddle for doors 48" wide
TEL-EP3	18" Extended paddle with 6" filler plate for doors 42" wide
TEL-SSK1	Security screw set for alarm box with opening tool
<b>Special factory installed options which cannot be field applied</b>	
(ADD )-CT	Digital L.C.D. counter
(ADD )-CW	Lock prepped for concealed wire (8' lead)
(ADD )-RO	Remote alarm output on A10 or A20 (for secondary signal)
(ADD )-RS	Remote siren on A20 (for mounting away from door)
TEL-AM1	Integrated door monitor switch for battery alarm
TEL-AM2	Integrated door monitor switch for direct power alarm

# TRIDENT™

## Multi-Point Exit Lock



# ASSA ABLOY

### Single Door Applications




TEL-100,  
TEL-200



TEL-110,  
TEL-210



TEL-120,  
TEL-220

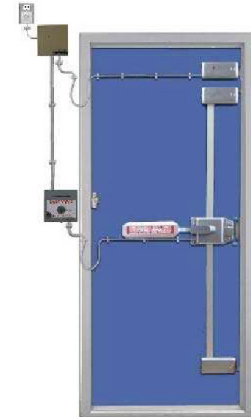

TEL-DES

### Double Door Applications



TEL-IAL



TEL-300,  
TEL-400



TEL-SSO



TEL-A20



TEL-320,  
TEL-420



TEL-310,  
TEL-410



TEL-A10

### Outside Entry Options



Standard Anti-Pry Plate

TEL-KLT-AP  
TEL-KDT-AP  
TEL-KRT-AP  
TEL-KLST  
TEL-KDST



TEL-MTT-AP



TEL-MTT



TEL-KLT



TEL-MTH



TEL-MTH-AP