


Rockwood INSFL3301

Inswing Locking Pull with Flat Latch

Experience a safer
and more open world

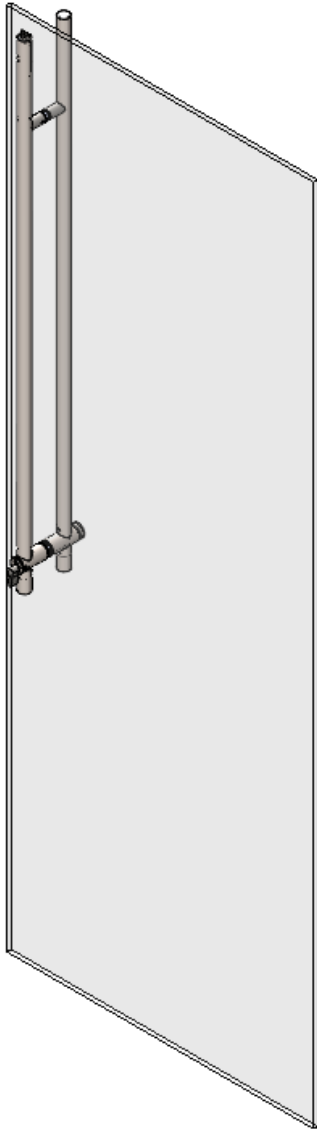

FL3301 comes in half height and full height options. Half height shown.

If stop height is greater than 1" please consult factory.

**RECOMMENDED FOR LOW TRAFFIC
INTERIOR APPLICATIONS**

SPECIFICATIONS:

MATERIAL:

Stainless Steel

FUNCTIONS:

- Keyed
- Passage (dogging)

DOOR TYPES & THICKNESS:

- Glass 1/2" - 7/8" thick
- Wood/Metal - 1 3/8" - 2 1/2" thick.

HANDING (INSWING ONLY):

- Right-hand (swing 5)
- Left-hand (swing 6)

STRIKE:

- INSFL-MSK
- INSFL-1600 Electric Strike

CYLINDER:

- Small format interchangeable core housing: 7-pin (SFIC) less core and key (Standard)
- Small format interchangeable core housing w/plastic construction core: 7-pin (SFIC)
- Customer Supplied Cylinder
- Dummy Cylinder

OPTIONS:

- Dogging Feature
- Push Bar(s)

AVAILABLE FINISHES:

- US32D/630
- US32/629
- US32DMS
- US32MS
- 10BE/613E
- 314E
- BSP (Black Suede Powder Coat)
- WSP (White Suede Powder Coat)

Rockwood Manufacturing Company
300 Main St.
Rockwood, PA 15557
www.rockwoodmfg.com
1 800 458 2424

Copyright © 2024, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited. Printed in the U.S.A.