


Rockwood PDU8500-4F

Fire Rated Panic Device

Half Height Straight Pull

Experience a safer
and more open world

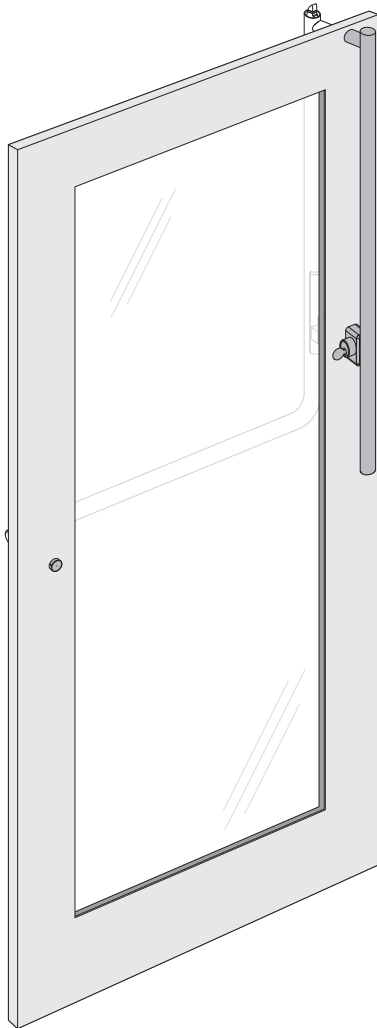

SPECIFICATIONS:

DOOR TYPES:

Hollow Metal,
Wood/Composite

MATERIAL:

Stainless Steel

FUNCTIONS:

- Keyed

CERTIFICATIONS:

ANSI/BHMA A156.3-2025
(Stainless Steel and Stock PC
Finishes)

UL305 (2017)

CAN/ULC-S132 (2016)

California Building Code
(2019) Sec. 11B-309.4

ADA Compliant A156.41 (2020)

IBC Sec. 1010.1.9.6 (2021)

A156.3-2020 1000lb Security Test

Fire Rated when specified with the
letter "F". UL10C 90 Min with Hose
Stream. Only for hollow metal or
wood/composite pair of doors 8' x 8'.
Sent with 3 PD18BFB Fire Bolts.
Order Form Available.

*This option was specifically designed
to be used in the state of California
or other areas where a 5lb. ADA. For
other geographies, we recommend
using our standard PDU8500.

AVAILABLE FINISHES:

- US32/629
- US32D/630
- US32316
- US32D316
- US32DMS
- US32D (device)/
US32 (push area)
- 4E
- 10BE
- 314E
- BSP
- WSP
- Stock Powder Coats

Engraved PUSH

Area Finish Options:

- Black
- White
- Less Paint
- Custom Color

Dimensions:

Grip: \varnothing 1 1/4"

Vertical (crash bar to top
of tube): 28 1/2" min

Horizontal: 15 3/4" min CTC;
48" max door width

Projection: 2 5/8" Panic side;
3 1/4" Mating pull side

Door Sizes 8' x 8' and under

Rockwood Manufacturing Company
300 Main St.
Rockwood, PA 15557
www.rockwoodmfg.com
1 800 458 2424

Rockwood is a brand associated with ASSA ABLOY Accessories and Door Controls Group, Inc.
Copyright © 2019-2026, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part
without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited. Printed in the U.S.A.