


# INSTALLATION INSTRUCTIONS



NO POWER TOOLS

- Do not use power tools to install this product.
- No Battery operated screws guns.
- The use of power tools during installation may void the product warranty.
- Do not overtighten.


## INSTALLATION INSTRUCTIONS

- 1 • Open hood.
  - Remove 6 upper fixing nuts located behind grill as shown.
  - Loosen 6 bottom fixing nuts located behind grill as shown. Do not remove nuts fully. **WARNING : GRILL MAY BECOME DETACHED AND FALL FORWARD.**
- 2 • Position one end of HOODPRODUCT between grill and hood.
  - Rotate HOODPRODUCT into final position between grill and hood. Ensure HOODPRODUCT is centrally located.
  - Replace six upper fixing nuts and
- 3 • tighten.
  - Tighten the six bottom nuts previously loosened.


**To Remove:** Reverse above procedure.  
**To Clean:** Use mild detergent and water solution. (Do NOT use solvents).  
 Avoid the use of automatic "Brush Style" car washes.  
 When closing the hood, do NOT pull on HOODPRODUCT.

1

REMOVE FIXING NUTS.

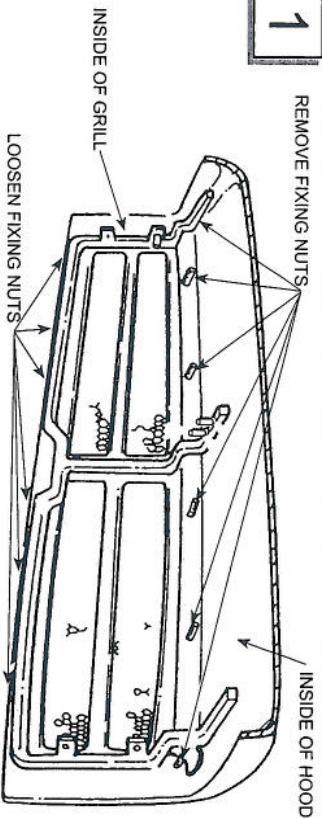

2

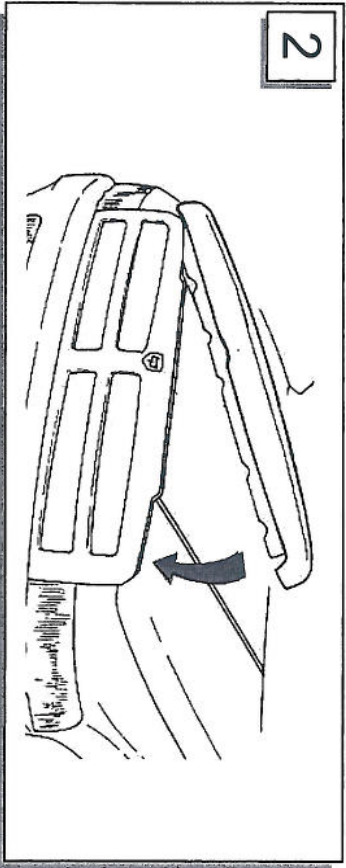

3

TIGHTEN FIXING NUTS AND SCREWS

