



COB CLASSIC HIGH BAY LIGHT SERIES



BIS-HB-50W-COB



BIS-HB-80W-COB



BIS-HB-100W-COB



BIS-HB-120W-COB



BIS-HB-150W-COB
BIS-HB-200W-COB



BIS-HB-250W-COB
BIS-HB-300W-COB

Model	LED Power	Input Voltage	LED Qty.	LED Chip / Driver	Color Temperature	Lumen	Beam Angle	Protection Grade	Dimension	List Price May 2019
BIS-HB-50W-COB	50W	AC85-265V	1pc.	BRIDGELUX COB CE Approved	3000K / 4000K / 5000K	4000-4500Lm	45° 90° / 120°	IP54	500mm * 310mm	8,850.00
BIS-HB-80W-COB	80W	AC85-265V	1pc.		3000K / 4000K / 5000K	6400-7200Lm	45° 90° / 120°	IP54	500mm * 390mm	11,650.00
BIS-HB-100W-COB	100W	AC100-277V	2pcs.	BRIDGELUX COB MEANWELL Driver	3000K / 4000K / 5000K	8000-9000Lm	45° 90° / 120°	IP54	500mm * 390mm	12,200.00
BIS-HB-120W-COB	120W	AC100-277V	2pcs.		3000K / 4000K / 5000K	9600-10800Lm	45° 90° / 120°	IP54	500mm * 430mm	14,350.00
BIS-HB-150W-COB	150W	AC100-277V	3pcs.		3000K / 4000K / 5000K	12000-13500Lm	45° 90° / 120°	IP54	500mm * 430mm	14,850.00
BIS-HB-200W-COB	200W	AC100-277V	4pcs.		3000K / 4000K / 5000K	16000-18000Lm	45° 90° / 120°	IP54	500mm * 480mm	16,850.00
BIS-HB-250W-COB	250W	AC100-277V	5pcs.		3000K / 4000K / 5000K	20000-22500Lm	45° 90° / 120°	IP54	500mm * 480mm	21,800.00
BIS-HB-300W-COB	300W	AC100-277V	6pcs.		3000K / 4000K / 5000K	24000-27000Lm	45° 90° / 120°	IP54	500mm * 520mm	28,950.00

UFO HIGH BAY LIGHT SERIES



BWS-HB-50W-UFO



BWS-HB-80W-UFO



BWS-HB-100W-UFO



BWS-HB-150W-UFO



BWS-HB-200W-UFO

Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Lumen	Beam Angle	Protection Grade	Dimension	List Price May 2019
BWS-HB-50W-UFO	50W	AC90-305V	MEANWELL	SMD3030 98pcs.	LUMILEDS (PHILIPS)	3000K 4000K 5000K	6000-6500Lm	60° 90° / 120°	IP65	D=240mm H=149mm	6,800.00
BWS-HB-80W-UFO	80W	AC90-305V	MEANWELL	SMD3030 98pcs.	LUMILEDS (PHILIPS)	3000K 4000K 5000K	9600-10400Lm	60° 90° / 120°	IP65	D=240mm H=149mm	6,950.00
BWS-HB-100W-UFO	100W	AC90-305V	MEANWELL	SMD3030 140pcs.	LUMILEDS (PHILIPS)	3000K 4000K 5000K	12000-13000Lm	60° 90° / 120°	IP65	D=290mm H=154mm	10,000.00
BWS-HB-150W-UFO	150W	AC90-305V	MEANWELL	SMD3030 210pcs.	LUMILEDS (PHILIPS)	3000K 4000K 5000K	18000-19500Lm	60° 90° / 120°	IP65	D=340mm H=160mm	12,500.00
BWS-HB-200W-UFO	200W	AC90-305V	MEANWELL	SMD3030 280pcs.	LUMILEDS (PHILIPS)	3000K 4000K 5000K	24000-26000Lm	60° 90° / 120°	IP65	D=386mm H=167mm	15,950.00

Prices are subject to change without prior notice.



UFO HIGH BAY LIGHT BLP SERIES



BLP-HB-60W-UFO-S1



BLP-HB-80W-UFO-S1



BLP-HB-100W-UFO-S1



BLP-HB-120W-UFO-S1



BLP-HB-150W-UFO-S1



BLP-HB-200W-UFO-S1

Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	Protection Grade	Dimension	List Price May 2019
BLP-HB-60W-UFO-S1	60W	AC90-305V	SOSEN	SMD5050 40pcs.	LUMILEDS (PHILIPS)	2700K - 3500K 4000K - 4800K 5000K - 6500K	140-155Lm/W	8400-9300Lm	60° 90° / 120°	IP65	D=273mm H=182mm	6,900.00
BLP-HB-80W-UFO-S1	80W	AC90-305V	SOSEN	SMD5050 40pcs.	LUMILEDS (PHILIPS)	2700K - 3500K 4000K - 4800K 5000K - 6500K	140-155Lm/W	11200-12400Lm	60° 90° / 120°	IP65	D=273mm H=182mm	7,100.00
BLP-HB-100W-UFO-S1	100W	AC90-305V	SOSEN	SMD5050 50pcs.	LUMILEDS (PHILIPS)	2700K - 3500K 4000K - 4800K 5000K - 6500K	140-155Lm/W	14000-15500Lm	60° 90° / 120°	IP65	D=273mm H=182mm	7,400.00
BLP-HB-120W-UFO-S1	120W	AC90-305V	SOSEN	SMD5050 60pcs.	LUMILEDS (PHILIPS)	2700K - 3500K 4000K - 4800K 5000K - 6500K	140-155Lm/W	16800-18600Lm	60° 90° / 120°	IP65	D=273mm H=193mm	8,900.00
BLP-HB-150W-UFO-S1	150W	AC90-305V	SOSEN	SMD5050 80pcs.	LUMILEDS (PHILIPS)	2700K - 3500K 4000K - 4800K 5000K - 6500K	140-155Lm/W	21000-23250Lm	60° 90° / 120°	IP65	D=273mm H=193mm	9,500.00
BLP-HB-200W-UFO-S1	200W	AC90-305V	SOSEN	SMD5050 120pcs.	LUMILEDS (PHILIPS)	2700K - 3500K 4000K - 4800K 5000K - 6500K	140-155Lm/W	28000-31000Lm	60° 90° / 120°	IP65	D=308mm H=202mm	14,250.00

UFO HIGH BAY LIGHT BHD SERIES



BHD-HB-200W-HBS24-BUS-A



BHD-HB-240W-HBS20-BUS-A



BHD-HB-300W-HBS30-BUS-A



BHD-HB-400W-HBS40-B-A



BHD-HB-400W-HBS40-B-A

Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	IP Grade	Dimension	List Price May 2019
BHD-HB-200W-HBS24-BUS-A	200W	AC90-305V	MEANWELL	SMD3030 336pcs.	LUMILEDS (PHILIPS)	2700K - 3500K 4000K - 4800K 5000K - 6500K	120-130Lm/W	24000-26000Lm	120°	IP65	D=320mm H=155mm	14,800.00
BHD-HB-240W-HBS20-BUS-A	240W	AC90-305V	MEANWELL	SMD3030 336pcs.	LUMILEDS (PHILIPS)	2700K - 3500K 4000K - 4800K 5000K - 6500K	120-130Lm/W	28800-31200Lm	120°	IP65	D=320mm H=155mm	15,700.00
BHD-HB-300W-HBS30-BUS-A	300W	AC90-305V	MEANWELL	SMD3030 455pcs.	LUMILEDS (PHILIPS)	2700K - 3500K 4000K - 4800K 5000K - 6500K	120-130Lm/W	36000-39000Lm	120°	IP65	D=320mm H=161mm	21,450.00
BHD-HB-400W-HBS40-B-A	400W	AC90-305V	MEANWELL	SMD3030 534pcs.	LUMILEDS (PHILIPS)	2700K - 3500K 4000K - 4800K 5000K - 6500K	120-130Lm/W	48000-52000Lm	120°	IP65	D=320mm H=222mm	34,050.00
BHD-HB-500W-HBS50-B-A	500W	AC90-305V	MEANWELL	SMD3030 712pcs.	LUMILEDS (PHILIPS)	2700K - 3500K 4000K - 4800K 5000K - 6500K	120-130Lm/W	60000-65000Lm	120°	IP65	D=320mm H=222mm	42,150.00

Prices are subject to change without prior notice.



GAS STATION CANOPY LIGHT CP001 SERIES



BSW-GS-100W-CP001



BSW-GS-150W-CP001




BSW-GS-200W-CP001




BSW-GS-240W-CP001

Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	Protection Grade	Dimension	List Price May 2019
BSW-GS-100W-CP001	100W	AC90-295V	SOSEN	96pcs.	LUMILEDS SMD3030	2700K - 3500K 4000K - 4800K 5000K - 6500K	110-120lm/W	1100-1200lm	60° 90°	IP65	L=230mm W=350mm H=76mm	11,550.00
BSW-GS-150W-CP001	150W	AC90-295V	SOSEN	144pcs.	LUMILEDS SMD3030	2700K - 3500K 4000K - 4800K 5000K - 6500K	110-120lm/W	16500-18000lm	60° 90°	IP65	L=310mm W=350mm H=76mm	14,250.00
BSW-GS-200W-CP001	200W	AC90-295V	SOSEN	192pcs.	LUMILEDS SMD3030	2700K - 3500K 4000K - 4800K 5000K - 6500K	110-120lm/W	22000-24000lm	60° 90°	IP65	L=394mm W=350mm H=76mm	17,500.00
BSW-GS-240W-CP001	240W	AC90-295V	SOSEN	240pcs.	LUMILEDS SMD3030	2700K - 3500K 4000K - 4800K 5000K - 6500K	110-120lm/W	26400-28800lm	60° 90°	IP65	L=474mm W=350mm H=76mm	20,350.00


GAS STATION CANOPY LIGHT G1P1 SERIES



BBR-GS-80W-G1P1



BBR-GS-100W-G1P1



BBR-GS-120W-G1P1



BBR-GS-150W-G1P1

Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	Protection Grade	Dimension	List Price May 2019
BBR-GS-80W-G1P1	80W	AC100-277V	MEANWELL	168pcs.	LUMILEDS SMD3030	3000K - 6000K	120-130lm/W	9600-10400lm	80°	IP65	L=412mm W=412mm H=102mm	19,700.00
BBR-GS-100W-G1P1	100W	AC100-277V	MEANWELL	168pcs.	LUMILEDS SMD3030	3000K - 6000K	120-130lm/W	12000-13000lm	80°	IP65	L=412mm W=412mm H=102mm	20,550.00
BBR-GS-120W-G1P1	120W	AC100-277V	MEANWELL	294pcs.	LUMILEDS SMD3030	3000K - 6000K	120-130lm/W	14400-15600lm	80°	IP65	L=412mm W=412mm H=102mm	22,750.00
BBR-GS-150W-G1P1	150W	AC100-277V	MEANWELL	294pcs.	LUMILEDS SMD3030	3000K - 6000K	120-130lm/W	18000-19500lm	80°	IP65	L=412mm W=412mm H=102mm	24,300.00

Prices are subject to change without prior notice.



SLIM COB FLOODLIGHT SERIES



Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	IP Grade	Dimension	List Price May 2019
BIS-FL-10W-COB	10W	AC85-265V	CE Approved	COB 1pc.	BRIGDELUX 45MIL	3000K - 6000K	90-100lm/W	900-1000lm	120°	IP66	L=119mm W=126mm H=40mm	1,100.00
BIS-FL-20W-COB	20W	AC85-265V	CE Approved	COB 1pc.	BRIGDELUX 45MIL	3000K - 6000K	90-100lm/W	1800-2000lm	120°	IP66	L=183mm W=179mm H=40mm	1,800.00
BIS-FL-30W-COB	30W	AC85-265V	CE Approved	COB 1pc.	BRIGDELUX 45MIL	3000K - 6000K	90-100lm/W	2700-3000lm	120°	IP66	L=227mm W=221mm H=45mm	2,350.00
BIS-FL-50W-COB	50W	AC85-265V	CE Approved	COB 1pc.	BRIGDELUX 45MIL	3000K - 6000K	90-100lm/W	4500-5000lm	120°	IP66	L=289mm W=271mm H=68mm	3,400.00
BIS-FL-70W-COB	70W	AC100-277V	MEANWELL	COB 2pcs.	BRIGDELUX 45MIL	3000K - 6000K	90-100lm/W	6300-7000lm	120°	IP66	L=290mm W=290mm H=93mm	7,600.00
BIS-FL-100W-COB	100W	AC100-277V	MEANWELL	COB 2pcs.	BRIGDELUX 45MIL	3000K - 6000K	90-100lm/W	9000-10000lm	120°	IP66	L=290mm W=290mm H=93mm	8,800.00
BIS-FL-150W-COB	150W	AC100-277V	MEANWELL	COB 3pcs.	BRIGDELUX 45MIL	3000K - 6000K	90-100lm/W	13500-15000lm	120°	IP66	L=335mm W=335mm H=97mm	11,400.00
BIS-FL-200W-COB	200W	AC100-277V	MEANWELL	COB 4pcs.	BRIGDELUX 45MIL	3000K - 6000K	90-100lm/W	18000-20000lm	120°	IP66	L=373mm W=373mm H=125mm	15,450.00
BIS-FL-250W-COB	250W	AC100-277V	MEANWELL	COB 4pcs.	BRIGDELUX 45MIL	3000K - 6000K	90-100lm/W	22500-25000lm	120°	IP66	L=373mm W=373mm H=125mm	18,650.00

SLIM SMD FLOODLIGHT SERIES



Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	IP Grade	Dimension	List Price May 2019
BIS-FL-10W-SMD	10W	AC85-265V	CE Approved	20pcs.	EPISTAR SMD5730	3000K - 6000K	90-100lm/W	900-1000lm	120°	IP66	L=119mm W=126mm H=40mm	1,000.00
BIS-FL-20W-SMD	20W	AC85-265V	CE Approved	40pcs.	EPISTAR SMD5730	3000K - 6000K	90-100lm/W	1800-2000lm	120°	IP66	L=180mm W=140mm H=40mm	1,450.00
BIS-FL-30W-SMD	30W	AC85-265V	CE Approved	60pcs.	EPISTAR SMD5730	3000K - 6000K	90-100lm/W	2700-3000lm	120°	IP66	L=222mm W=185mm H=45mm	2,100.00
BIS-FL-50W-SMD	50W	AC85-265V	CE Approved	100pcs.	EPISTAR SMD5730	3000K - 6000K	90-100lm/W	4500-5000lm	120°	IP66	L=285mm W=233mm H=45mm	2,650.00
BIS-FL-100W-SMD	100W	AC100-277V	MEANWELL	200pcs.	EPISTAR SMD5730	3000K - 6000K	90-100lm/W	9000-10000lm	120°	IP66	L=290mm W=290mm H=93mm	7,750.00
BIS-FL-150W-SMD	150W	AC100-277V	MEANWELL	300pcs.	EPISTAR SMD5730	3000K - 6000K	90-100lm/W	13500-15000lm	120°	IP66	L=335mm W=315mm H=97mm	9,600.00
BIS-FL-200W-SMD	200W	AC100-277V	MEANWELL	400pcs.	EPISTAR SMD5730	3000K - 6000K	90-100lm/W	18000-20000lm	120°	IP66	L=373mm W=373mm H=125mm	12,750.00
BIS-FL-250W-SMD	250W	AC100-277V	MEANWELL	500pcs.	EPISTAR SMD5730	3000K - 6000K	90-100lm/W	22500-25000lm	120°	IP66	L=343mm W=385mm H=125mm	16,000.00

Prices are subject to change without prior notice.



HIGH LUMEN SMD MODULAR FLOODLIGHT SERIES



Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	IP Grade	Dimension	List Price May 2019
BLP-FL-50W-V601	50W	AC100-277V	MEANWELL	28pcs.	PHILIPS SMD5050	3000K - 6000K	135-155Lm/W	6750-7750Lm	25° / 40° 60° / 90°	IP66	L=260mm W=105mm H=195mm	- - -
BLP-FL-100W-V602	100W	AC100-277V	MEANWELL	56pcs.	PHILIPS SMD5050	3000K - 6000K	135-155Lm/W	13500-15500Lm	25° / 40° 60° / 90°	IP66	L=260mm W=168mm H=195mm	12,000.00
BLP-FL-150W-V603	150W	AC100-277V	MEANWELL	84pcs.	PHILIPS SMD5050	3000K - 6000K	135-155Lm/W	20250-23250Lm	25° / 40° 60° / 90°	IP66	L=260mm W=258mm H=195mm	16,150.00
BLP-FL-200W-V604	200W	AC100-277V	MEANWELL	112pcs.	PHILIPS SMD5050	3000K - 6000K	135-155Lm/W	27000-31000Lm	25° / 40° 60° / 90°	IP66	L=348mm W=260mm H=195mm	20,900.00
BLP-FL-250W-V605	250W	AC100-277V	MEANWELL	140pcs.	PHILIPS SMD5050	3000K - 6000K	135-155Lm/W	33750-38750Lm	25° / 40° 60° / 90°	IP66	L=438mm W=260mm H=195mm	25,100.00
BLP-FL-300W-V606	300W	AC100-277V	MEANWELL	168pcs.	PHILIPS SMD5050	3000K - 6000K	135-155Lm/W	40500-46500Lm	25° / 40° 60° / 90°	IP66	L=520mm W=260mm H=195mm	32,150.00
BLP-FL-400W-V608	400W	AC100-277V	MEANWELL	224pcs.	PHILIPS SMD5050	3000K - 6000K	135-155Lm/W	54000-62000Lm	25° / 40° 60° / 90°	IP66	L=520mm W=348mm H=195mm	42,300.00
BLP-FL-500W-V610	500W	AC100-277V	MEANWELL	280pcs.	PHILIPS SMD5050	3000K - 6000K	135-155Lm/W	67500-77500Lm	25° / 40° 60° / 90°	IP66	L=520mm W=438mm H=195mm	49,590.00

NARROW BEAM SMD FLOODLIGHT SERIES




Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	IP Grade	Dimension	List Price May 2019
BIS-FL-10W-XTGD	10W	AC85-265V	CE Approved	8pcs.	PHILIPS SMD3030	2800K - 6000K	90-100Lm/W	900-1000Lm	10° / 25° 45° / 60°	IP66	L=129mm W=99mm H=44mm	1,300.00
BIS-FL-20W-XTGD	20W	AC85-265V	CE Approved	20pcs.	PHILIPS SMD3030	2800K - 6000K	90-100Lm/W	1800-2000Lm	10° / 25° 45° / 60°	IP66	L=175mm W=135mm H=44mm	1,900.00
BIS-FL-30W-XTGD	30W	AC85-265V	CE Approved	30pcs.	PHILIPS SMD3030	2800K - 6000K	90-100Lm/W	2700-3000Lm	10° / 25° 45° / 60°	IP66	L=215mm W=175mm H=147mm	2,600.00
BIS-FL-50W-XTGD	50W	AC85-265V	CE Approved	55pcs.	PHILIPS SMD3030	2800K - 6000K	90-100Lm/W	4500-5000Lm	10° / 25° 45° / 60°	IP66	L=275mm W=225mm H=48mm	3,700.00
BIS-FL-100W-XTGD	100W	AC100-277V	MEANWELL	100pcs.	PHILIPS SMD3030	2800K - 6000K	90-100Lm/W	9000-10000Lm	10° / 25° 45° / 60°	IP66	L=325mm W=305mm H=53mm	8,950.00
BIS-FL-150W-XTGD	150W	AC100-277V	MEANWELL	150pcs.	PHILIPS SMD3030	2800K - 6000K	90-100Lm/W	13500-15000Lm	10° / 25° 45° / 60°	IP66	L=385mm W=305mm H=58mm	11,250.00
BIS-FL-200W-XTGD	200W	AC100-277V	MEANWELL	200pcs.	PHILIPS SMD3030	2800K - 6000K	90-100Lm/W	18000-20000Lm	10° / 25° 45° / 60°	IP66	L=435mm W=335mm H=65mm	14,400.00

Prices are subject to change without prior notice.



MODULAR HIGH MAST FLOODLIGHT QCDC SERIES

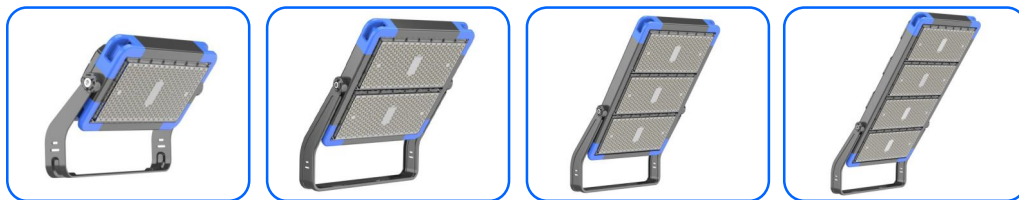

Modular design integrated with driver per module.

Anti UV optical lens with >94% transmittance.

High light efficiency up to 140Lm/W LUMILEDS and OSRAM chip.

MEANWELL XLG or SOSEN driver.

IP66 protection grade.

Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	IP Grade	Dimension	List Price May 2019
BIS-HM-250W-QCDC	250W	AC100-277V	MEANWELL XLG	336pcs.	LUMILEDS SMD3030	3000K - 6000K	130-140Lm/W	32500-35000Lm	25° / 45° 60° / 90°	IP66	L=462mm W=173mm H=283mm	17,950.00
				126pcs.	OSRAM SMD3737				10°			21,750.00
BIS-HM-500W-QCDC	500W	AC100-277V	MEANWELL XLG	672pcs.	LUMILEDS SMD3030	3000K - 6000K	130-140Lm/W	65000-70000Lm	25° / 45° 60° / 90°	IP66	L=462mm W=217mm H=497mm	37,650.00
				252pcs.	OSRAM SMD3737				10°			45,200.00
BIS-HM-750W-QCDC	750W	AC100-277V	MEANWELL XLG	1008pcs.	LUMILEDS SMD3030	3000K - 6000K	130-140Lm/W	97500-105000Lm	25° / 45° 60° / 90°	IP66	L=462mm W=217mm H=677mm	54,550.00
				378pcs.	OSRAM SMD3737				10°			65,900.00
BIS-HM-1000W-QCDC	1000W	AC100-277V	MEANWELL XLG	1344pcs.	LUMILEDS SMD3030	3000K - 6000K	130-140Lm/W	130000-140000Lm	25° / 45° 60° / 90°	IP66	L=462mm W=217mm H=854mm	69,700.00
				504pcs.	OSRAM SMD3737				10°			84,850.00

MODULAR HIGH MAST FLOODLIGHT FL02 SERIES




Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	IP Grade	Dimension	List Price May 2019
BHD-HM-250W-FL02	250W	AC100-277V	MEANWELL HLG	408pcs.	LUMILEDS SMD3030	3000K - 6000K	110-125Lm/W	27500-31250Lm	30° 60° / 120°	IP66	L=483mm W=135mm H=280mm	23,000.00
				120pcs.	SAMSUNG SMD3535				10°			25,750.00
BHD-HM-500W-FL02	500W	AC100-277V	MEANWELL HLG	816pcs.	LUMILEDS SMD3030	3000K - 6000K	110-125Lm/W	55000-62500Lm	30° 60° / 120°	IP66	L=510mm W=137mm H=564mm	56,000.00
				240pcs.	SAMSUNG SMD3535				10°			59,800.00
BHD-HM-750W-FL02	750W	AC100-277V	MEANWELL HLG	1224pcs.	LUMILEDS SMD3030	3000K - 6000K	110-125Lm/W	82500-93750Lm	30° 60° / 120°	IP66	L=510mm W=137mm H=765mm	79,000.00
				360pcs.	SAMSUNG SMD3535				10°			84,800.00
BHD-HM-1000W-FL02	1000W	AC100-277V	MEANWELL HLG	1632pcs.	LUMILEDS SMD3030	3000K - 6000K	110-125Lm/W	110000-125000Lm	30° 60° / 120°	IP66	L=510mm W=137mm H=966mm	98,000.00
				480pcs.	SAMSUNG SMD3535				10°			105,500.00
BHD-HM-1250W-FL02	1250W	AC100-277V	MEANWELL HLG	2040pcs.	LUMILEDS SMD3030	3000K - 6000K	110-125Lm/W	137500-156250Lm	30° 60° / 120°	IP66	L=510mm W=137mm H=1166mm	145,050.00
				600pcs.	SAMSUNG SMD3535				10°			154,800.00

Prices are subject to change without prior notice.



ROUND HIGH MAST FLOODLIGHT 07G5 SERIES

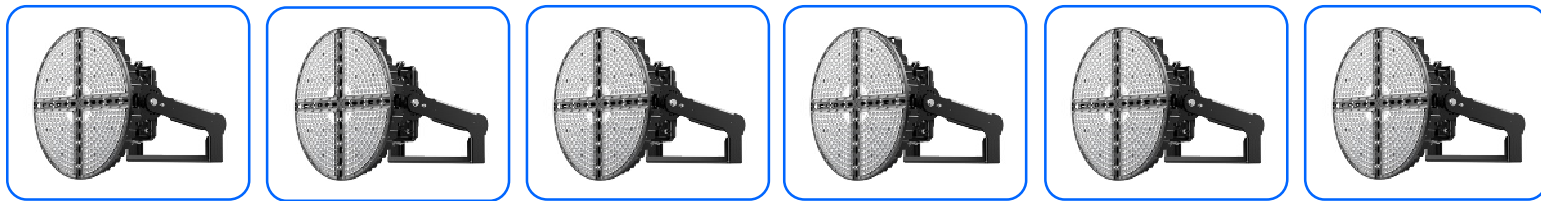

Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	IP Grade	Dimension	List Price May 2019
BBR-HM-300W-07-G5	300W	AC100-277V	MEANWELL	160pcs. 200pcs.	PHILIPS SMD5050	3000K - 6000K	150-160Lm/W	45000-48000Lm	15° 30°	IP66	D=496mm W=207mm H=675mm	73,100.00
BBR-HM-400W-07-G5	400W	AC100-277V	MEANWELL	160pcs. 200pcs.	PHILIPS SMD5050	3000K - 6000K	150-160Lm/W	60000-64000Lm	15° 30°	IP66	D=496mm W=207mm H=675mm	83,750.00
BBR-HM-500W-07-G5	500W	AC100-277V	MEANWELL	160pcs. 280pcs.	PHILIPS SMD5050	3000K - 6000K	150-160Lm/W	75000-80000Lm	15° 30°	IP66	D=496mm W=207mm H=675mm	93,300.00
BBR-HM-600W-07-G5	600W	AC100-277V	MEANWELL	160pcs. 280pcs.	PHILIPS SMD5050	3000K - 6000K	150-160Lm/W	90000-96000Lm	15° 30°	IP66	D=496mm W=207mm H=675mm	107,850.00
BBR-HM-700W-07-G5	700W	AC100-277V	MEANWELL	240pcs. 400pcs.	PHILIPS SMD5050	3000K - 6000K	150-160Lm/W	105000-112000Lm	15° 30°	IP66	D=610mm W=228mm H=734mm	134,650.00
BBR-HM-800W-07-G5	800W	AC100-277V	MEANWELL	240pcs. 400pcs.	PHILIPS SMD5050	3000K - 6000K	150-160Lm/W	120000-128000Lm	15° 30°	IP66	D=610mm W=228mm H=734mm	155,100.00
BBR-HM-1000W-07-G5	1000W	AC100-277V	MEANWELL	240pcs. 552pcs.	PHILIPS SMD5050	3000K - 6000K	150-160Lm/W	150000-160000Lm	15° 30°	IP66	D=610mm W=228mm H=734mm	165,850.00

Prices are subject to change without prior notice.



LED STREET LIGHT G5 & G5S SERIES



Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	IP Grade	Dimension	List Price May 2019	
												SOSEN	MEANWELL ELG
BDM-ST-30W-G5	30W	AC100-240V AC100-277V	MEANWELL or SOSEN	36pcs.	LUMILEDS SMD3030	3000K - 6000K	100-110Lm/W	3000-3300Lm	70° x 150°	IP66	L=515mm W=254mm H=193mm	11,050.00	13,150.00
BDM-ST-40W-G5	40W	AC100-240V AC100-277V	MEANWELL or SOSEN	36pcs.	LUMILEDS SMD3030	3000K - 6000K	100-110Lm/W	4000-4400Lm	70° x 150°	IP66	L=515mm W=254mm H=193mm	11,150.00	13,250.00
BDM-ST-50W-G5	50W	AC100-240V AC100-277V	MEANWELL or SOSEN	72pcs.	LUMILEDS SMD3030	3000K - 6000K	100-110Lm/W	5000-5500Lm	70° x 150°	IP66	L=515mm W=254mm H=193mm	12,750.00	14,100.00
BDM-ST-60W-G5	60W	AC100-240V AC100-277V	MEANWELL or SOSEN	72pcs.	LUMILEDS SMD3030	3000K - 6000K	100-110Lm/W	6000-6600Lm	70° x 150°	IP66	L=515mm W=254mm H=193mm	12,850.00	14,200.00
BDM-ST-70W-G5	70W	AC100-240V AC100-277V	MEANWELL or SOSEN	72pcs.	LUMILEDS SMD3030	3000K - 6000K	100-110Lm/W	7000-7700Lm	70° x 150°	IP66	L=515mm W=254mm H=193mm	13,900.00	14,800.00
BDM-ST-80W-G5	80W	AC100-240V AC100-277V	MEANWELL or SOSEN	72pcs.	LUMILEDS SMD3030	3000K - 6000K	100-110Lm/W	8000-8800Lm	70° x 150°	IP66	L=515mm W=254mm H=193mm	14,000.00	14,900.00
BDM-ST-100W-G5S	100W	AC100-240V AC100-277V	MEANWELL or SOSEN	96pcs.	LUMILEDS SMD3030	3000K - 6000K	100-110Lm/W	10000-11000Lm	70° x 150°	IP66	L=615mm W=308mm H=131mm	19,800.00	19,600.00
BDM-ST-120W-G5S	120W	AC100-240V AC100-277V	MEANWELL or SOSEN	96pcs.	LUMILEDS SMD3030	3000K - 6000K	100-110Lm/W	12000-13200Lm	70° x 150°	IP66	L=615mm W=308mm H=131mm	20,200.00	20,150.00
BDM-ST-150W-G5S	150W	AC100-240V AC100-277V	MEANWELL or SOSEN	128pcs.	LUMILEDS SMD3030	3000K - 6000K	100-110Lm/W	15000-16500Lm	70° x 150°	IP66	L=615mm W=308mm H=131mm	21,500.00	21,100.00

LED STREET LIGHT G6 SERIES



Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	IP Grade	Dimension	List Price May 2019	
												SOSEN	MEANWELL ELG
BDM-ST-50W-G6	50W	AC100-240V AC100-277V	MEANWELL or SOSEN	42pcs.	LUMILEDS SMD3030	3000K - 6000K	110-125Lm/W	5500-6250Lm	70° x 150°	IP66	L=333mm W=250mm H=74mm	9,750.00	---
BDM-ST-60W-G6	60W	AC100-240V AC100-277V	MEANWELL or SOSEN	42pcs.	LUMILEDS SMD3030	3000K - 6000K	110-125Lm/W	6600-7500Lm	70° x 150°	IP66	L=333mm W=250mm H=74mm	9,800.00	---
BDM-ST-80W-G6	80W	AC100-240V AC100-277V	MEANWELL or SOSEN	42pcs.	LUMILEDS SMD3030	3000K - 6000K	110-125Lm/W	8800-10000Lm	70° x 150°	IP66	L=358mm W=250mm H=74mm	11,000.00	11,200.00
BDM-ST-100W-G6	100W	AC100-240V AC100-277V	MEANWELL or SOSEN	84pcs.	LUMILEDS SMD3030	3000K - 6000K	110-125Lm/W	11000-12500Lm	70° x 150°	IP66	L=408mm W=250mm H=74mm	15,300.00	15,150.00
BDM-ST-120W-G6	120W	AC100-240V AC100-277V	MEANWELL or SOSEN	84pcs.	LUMILEDS SMD3030	3000K - 6000K	110-125Lm/W	13200-15000Lm	70° x 150°	IP66	L=408mm W=250mm H=74mm	15,850.00	15,700.00
BDM-ST-150W-G6	150W	AC100-240V AC100-277V	MEANWELL or SOSEN	126pcs.	LUMILEDS SMD3030	3000K - 6000K	110-125Lm/W	16500-18750Lm	70° x 150°	IP66	L=538mm W=250mm H=74mm	19,600.00	19,500.00
BDM-ST-180W-G6	180W	AC100-240V AC100-277V	MEANWELL or SOSEN	126pcs.	LUMILEDS SMD3030	3000K - 6000K	110-125Lm/W	19800-22500Lm	70° x 150°	IP66	L=538mm W=250mm H=74mm	21,800.00	20,550.00
BDM-ST-200W-G6	200W	AC100-240V AC100-277V	MEANWELL or SOSEN	168pcs.	LUMILEDS SMD3030	3000K - 6000K	110-125Lm/W	22000-25000Lm	70° x 150°	IP66	L=668mm W=250mm H=74mm	28,200.00	27,000.00
BDM-ST-250W-G6	250W	AC100-240V AC100-277V	MEANWELL or SOSEN	168pcs.	LUMILEDS SMD3030	3000K - 6000K	110-125Lm/W	27500-31250Lm	70° x 150°	IP66	L=708mm W=250mm H=74mm	29,800.00	27,800.00

Prices are subject to change without prior notice.



LED STREET LIGHT L12A SERIES



Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	IP Grade	Dimension	List Price May 2019	
												SOSEN / MOSO	MEANWELL HLG
BLP-ST-50W-L12A	50W	AC100-277V	MEANWELL or SOSEN	28pcs.	LUMILEDS SMD5050	3000K - 6000K	145-160Lm/W	7250-8000Lm	TYPE I TYPE II TYPE III	IP66	L=440mm W=273mm H=86mm	7,950.00	7,600.00
BLP-ST-100W-L12A	100W	AC100-277V	MEANWELL or MOSO	56pcs.	LUMILEDS SMD5050	3000K - 6000K	145-160Lm/W	14500-16000Lm	TYPE I TYPE II TYPE III	IP66	L=477mm W=273mm H=86mm	12,800.00	14,100.00
BLP-ST-150W-L12A	150W	AC100-277V	MEANWELL or MOSO	84pcs.	LUMILEDS SMD5050	3000K - 6000K	145-160Lm/W	21750-24000Lm	TYPE I TYPE II TYPE III	IP66	L=571mm W=273mm H=86mm	16,300.00	17,500.00
BLP-ST-200W-L12A	200W	AC100-277V	MEANWELL or MOSO	112pcs.	LUMILEDS SMD5050	3000K - 6000K	145-160Lm/W	29000-32000Lm	TYPE I TYPE II TYPE III	IP66	L=665mm W=273mm H=86mm	20,700.00	21,700.00

LED STREET LIGHT ST07 SERIES



Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	IP Grade	Dimension	List Price May 2019	
												SOSEN	MEANWELL
BAG-ST-30W-ST07	30W	AC100-277V	SOSEN	56pcs.	NICHIA	3000K 4000K 5000K	110-120Lm/W	3300-3600Lm	75° x 150°	IP66	L=763mm W=352mm H=167mm	17,300.00	
BAG-ST-50W-ST07	50W	AC100-277V	SOSEN	70pcs.	NICHIA	3000K 4000K 5000K	110-120Lm/W	5500-6000Lm	75° x 150°	IP66	L=763mm W=352mm H=167mm	17,900.00	
BAG-ST-70W-ST07	70W	AC100-277V	SOSEN	91pcs.	NICHIA	3000K 4000K 5000K	110-120Lm/W	7700-8400Lm	75° x 150°	IP66	L=763mm W=352mm H=167mm	19,000.00	
BAG-ST-90W-ST07	90W	AC100-277V	SOSEN	91pcs.	NICHIA	3000K 4000K 5000K	110-120Lm/W	9900-10800Lm	75° x 150°	IP66	L=763mm W=352mm H=167mm	20,000.00	
BAG-ST-120W-ST07	120W	AC100-277V	SOSEN	144pcs.	NICHIA	3000K 4000K 5000K	110-120Lm/W	13200-14400Lm	75° x 150°	IP66	L=763mm W=352mm H=167mm	25,500.00	
BAG-ST-150W-ST07	150W	AC100-277V	SOSEN	176pcs.	NICHIA	3000K 4000K 5000K	110-120Lm/W	16500-18000Lm	75° x 150°	IP66	L=763mm W=352mm H=167mm	27,000.00	
BAG-ST-180W-ST07	180W	AC100-277V	SOSEN	176pcs.	NICHIA	3000K 4000K 5000K	110-120Lm/W	19800-21600Lm	75° x 150°	IP66	L=763mm W=352mm H=167mm	29,000.00	

Prices are subject to change without prior notice.



ALL-IN-ONE LED STREET LIGHT A SERIES



Model	LED Power	SOLAR Panel	Battery	Charging Time	Discharge Time	LED Chip / Qty.	Luminous Flux	Color Temp.	Beam Angle	IP Grade	Weight	Dimension	List Price May 2019
BAL-SST-12W-A012	12W	Monocrystalline 18V 20W	Li-ion 12V 8Ah	6-7hrs.	* 10hrs. at 100% Light * 3-5 days at power saving mode	BRIDGELUX SMD3030 12pcs.	1440Lm @ 100% 520Lm @ 30%	3000K 5000K 6500K	120°	IP65	5.5Kg	L=495mm W=355mm H=80mm	12,950.00
BAL-SST-15W-A015	15W	Monocrystalline 18V 30W	Li-ion 12V 10Ah	6-7hrs.	* 10hrs. at 100% Light * 3-5 days at power saving mode	BRIDGELUX SMD3030 15pcs.	1800Lm @ 100% 650Lm @ 30%	3000K 5000K 6500K	120°	IP65	7.8Kg	L=740mm W=305mm H=140mm	18,250.00
BAL-SST-18W-A018	18W	Monocrystalline 18V 35W	Li-ion 12V 15Ah	6-7hrs.	* 10hrs. at 100% Light * 3-5 days at power saving mode	BRIDGELUX SMD3030 18pcs.	2160Lm @ 100% 700Lm @ 30%	3000K 5000K 6500K	120°	IP65	7.8Kg	L=740mm W=305mm H=140mm	21,100.00
BAL-SST-20W-A020	20W	Monocrystalline 18V 40W	Li-ion 12V 18Ah	6-7hrs.	* 10hrs. at 100% Light * 3-5 days at power saving mode	BRIDGELUX SMD3030 20pcs.	2400Lm @ 100% 820Lm @ 30%	3000K 5000K 6500K	120°	IP65	10.5Kg	L=940mm W=305mm H=140mm	23,400.00
BAL-SST-25W-A025	25W	Monocrystalline 18V 45W	Li-ion 12V 18Ah	6-7hrs.	* 10hrs. at 100% Light * 3-5 days at power saving mode	BRIDGELUX SMD3030 25pcs.	3000Lm @ 100% 920Lm @ 30%	3000K 5000K 6500K	120°	IP65	10.5Kg	L=940mm W=305mm H=140mm	24,700.00
BAL-SST-30W-A030	30W	Monocrystalline 18V 60W	Li-ion 12V 21Ah	6-7hrs.	* 10hrs. at 100% Light * 3-5 days at power saving mode	BRIDGELUX SMD3030 30pcs.	3600Lm @ 100% 1100Lm @ 30%	3000K 5000K 6500K	120°	IP65	14.8Kg	L=1120mm W=305mm H=140mm	28,700.00
BAL-SST-40W-A040	40W	Monocrystalline 18V 60W	Li-ion 12V 24Ah	6-7hrs.	* 10hrs. at 100% Light * 3-5 days at power saving mode	BRIDGELUX SMD3030 40pcs.	4800Lm @ 100% 1460Lm @ 30%	3000K 5000K 6500K	120°	IP65	14.8Kg	L=1120mm W=305mm H=140mm	29,850.00
BAL-SST-50W-A050	50W	Monocrystalline 18V 80W	Li-ion 12V 36Ah	6-7hrs.	* 10hrs. at 100% Light * 3-5 days at power saving mode	BRIDGELUX SMD3030 50pcs.	6000Lm @ 100% 1800Lm @ 30%	3000K 5000K 6500K	120°	IP65	19Kg	L=1120mm W=440mm H=140mm	39,550.00
BAL-SST-60W-A060	60W	Monocrystalline 18V 90W	Li-ion 12V 42Ah	6-7hrs.	* 10hrs. at 100% Light * 3-5 days at power saving mode	BRIDGELUX SMD3030 60pcs.	7200Lm @ 100% 2400Lm @ 30%	3000K 5000K 6500K	120°	IP65	19Kg	L=1120mm W=440mm H=140mm	41,050.00
BAL-SST-80W-A080	80W	Monocrystalline 18V 100W	Li-ion 12V 44Ah	6-7hrs.	* 10hrs. at 100% Light * 3-5 days at power saving mode	BRIDGELUX SMD3030 80pcs.	9600Lm @ 100% 2800Lm @ 30%	3000K 5000K 6500K	120°	IP65	19Kg	L=1120mm W=440mm H=140mm	43,900.00
BAL-SST-100W-A100	100W	Monocrystalline 18V 130W	Li-ion 12V 66Ah	6-7hrs.	* 10hrs. at 100% Light * 3-5 days at power saving mode	BRIDGELUX COB - 2pcs.	12000Lm @ 100% 3600Lm @ 30%	3000K 5000K 6500K	120°	IP65	29.8Kg	L=1270mm W=540mm H=150mm	70,150.00
BAL-SST-120W-A120	120W	Monocrystalline 18V 150W	Li-ion 12V 76Ah	6-7hrs.	* 10hrs. at 100% Light * 3-5 days at power saving mode	BRIDGELUX COB - 2pcs.	14400Lm @ 100% 4500Lm @ 30%	3000K 5000K 6500K	120°	IP65	29.8Kg	L=1270mm W=540mm H=150mm	73,150.00

Prices are subject to change without prior notice.



HIGH LUMEN TWO-IN-ONE LED STREET LIGHT EAGLE SERIES - 2years Warranty



Model	LED Power	SOLAR Panel	Battery	Charging Time	Discharge Time	LED Chip / Qty.	Luminous Flux	Color Temp.	Beam Angle	IP Grade	Weight	Dimension	List Price May 2019
BJL-SST-12W-2in1-E	12W	Monocrystalline 18V 20W	Li-ion 12V 8Ah	6-7hrs.	3-4 Hours at 100% brightness, around 30 hours on energy saving mode in 20% brightness	BRIDGELUX SMD3030 12pcs.	1440 - 1680Lm	3000K 4000K 5000K	120°	IP65	12Kg	L=720mm W=350mm H=490mm	15,200.00
BJL-SST-20W-2in1-E	20W	Monocrystalline 18V 30W	Li-ion 12V 12Ah	6-7hrs.	3-4 Hours at 100% brightness, around 30 hours on energy saving mode in 20% brightness	BRIDGELUX SMD3030 20pcs.	2400 - 2800Lm	3000K 4000K 5000K	120°	IP65	13Kg	L=720mm W=340mm H=670mm	18,250.00
BJL-SST-40W-2in1-E	40W	Monocrystalline 18V 50W	Li-ion 12V 24Ah	6-7hrs.	3-4 Hours at 100% brightness, around 30 hours on energy saving mode in 20% brightness	BRIDGELUX SMD3030 40pcs.	4800 - 5600Lm	3000K 4000K 5000K	120°	IP65	16Kg	L=935mm W=540mm H=670mm	27,000.00
BJL-SST-60W-2in1-E	60W	Monocrystalline 18V 80W	Li-ion 12V 32Ah	6-7hrs.	5-6 Hours at 100% brightness, around 30 hours on energy saving mode in 20% brightness	BRIDGELUX SMD3030 60pcs.	7200 - 8400Lm	3000K 4000K 5000K	120°	IP65	22Kg	L=880mm W=670mm H=870mm	44,650.00

HIGH LUMEN TWO-IN-ONE LED STREET LIGHT SOLOS SERIES - 2years Warranty



Model	LED Power	SOLAR Panel	Battery	Charging Time	Discharge Time	LED Chip / Qty.	Luminous Flux	Color Temp.	Beam Angle	IP Grade	Weight	Dimension	List Price May 2019
BJL-SST-20W-2in1-SS	20W	Monocrystalline 18V 30W	Li-ion 7.4V 12Ah	6hrs.	3-4 Hours at 100% brightness, around 30 hours on energy saving mode in 20% brightness	BRIDGELUX SMD3030 20pcs.	1440 - 1680Lm	3000K 4000K 5000K	110° x 150°	IP65	18Kg	L=670mm W=340mm H=400mm	30,100.00
BJL-SST-40W-2in1-SS	40W	Monocrystalline 18V 50W	Li-ion 7.4V 24Ah	6hrs.	3-4 Hours at 100% brightness, around 30 hours on energy saving mode in 20% brightness	BRIDGELUX SMD3030 40pcs.	2400 - 2800Lm	3000K 4000K 5000K	110° x 150°	IP65	18Kg	L=680mm W=540mm H=400mm	35,150.00
BJL-SST-60W-2in1-SS	60W	Monocrystalline 18V 80W	Li-ion 11.1V 32Ah	6hrs.	5-6 Hours at 100% brightness, around 40 hours on energy saving mode in 20% brightness	BRIDGELUX SMD3030 60pcs.	4800 - 5600Lm	3000K 4000K 5000K	110° x 150°	IP65	24Kg	L=870mm W=670mm H=400mm	46,750.00
BJL-SST-90W-2in1-SS	90W	Monocrystalline 18V 120W	Li-ion 11.1V 48Ah	6hrs.	5-6 Hours at 100% brightness, around 40 hours on energy saving mode in 20% brightness	BRIDGELUX SMD3030 90pcs.	7200 - 8400Lm	3000K 4000K 5000K	110° x 150°	IP65	31Kg	L=1230mm W=670mm H=400mm	72,200.00

Prices are subject to change without prior notice.



EXPLOSION PROOF LINEAR LIGHT SERIES



Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	IP Grade	Dimension	List Price May 2019
BNB-EXP-20W-EPTL03	20W	AC85-265V	CE Approved	1pc.	EPSTAR or BRIDGELUX SMD	3000K - 6000K	80-90Lm/W	1600-1800Lm	120°	IP66	L=708mm W=132mm H=91mm	23,000.00
BNB-EXP-40W-EPTL03	40W	AC85-265V	CE Approved	1pc.	EPSTAR or BRIDGELUX SMD	3000K - 6000K	80-90Lm/W	3200-3600Lm	120°	IP66	L=1315mm W=132mm H=91mm	28,700.00
BNB-EXP-60W-EPTL03	60W	AC85-265V	CE Approved	1pc.	EPSTAR or BRIDGELUX SMD	3000K - 6000K	80-90Lm/W	4800-5400Lm	120°	IP66	L=1315mm W=132mm H=91mm	31,750.00

EXPLOSION PROOF FLOODLIGHT SERIES



Model	LED Power	Input Voltage	LED Driver	LED Qty.	LED Chip	Color Temperature	Luminous Efficiency	Luminous Flux	Beam Angle	IP Grade	Dimension	List Price May 2019
BNB-EXP-20W-EPL05	20W	AC85-265V	CE Approved	1pc.	EPSTAR or BRIDGELUX COB	3000K - 6000K	80-90Lm/W	1600-1800Lm	120°	IP66	L=220mm W=220mm H=250mm	15,800.00
BNB-EXP-30W-EPL05	30W	AC85-265V	CE Approved	1pc.	EPSTAR or BRIDGELUX COB	3000K - 6000K	80-90Lm/W	2400-2700Lm	120°	IP66	L=220mm W=220mm H=250mm	17,300.00
BNB-EXP-40W-EPL05	40W	AC85-265V	CE Approved	1pc.	EPSTAR or BRIDGELUX COB	3000K - 6000K	80-90Lm/W	3200-3600Lm	120°	IP66	L=220mm W=220mm H=250mm	18,850.00
BNB-EXP-50W-EPL05	50W	AC85-265V	CE Approved	1pc.	EPSTAR or BRIDGELUX COB	3000K - 6000K	80-90Lm/W	4000-4500Lm	120°	IP66	L=220mm W=220mm H=250mm	20,150.00
BNB-EXP-60W-EPL03	60W	AC100-277V	CE Approved	1pc.	EPSTAR or BRIDGELUX COB	3000K - 6000K	80-90Lm/W	4800-5400Lm	120°	IP66	L=300mm W=300mm H=226mm	31,750.00
BNB-EXP-80W-EPL03	80W	AC100-277V	MEANWELL	1pc.	EPSTAR or BRIDGELUX COB	3000K - 6000K	80-90Lm/W	6400-7200Lm	120°	IP66	L=300mm W=300mm H=226mm	34,600.00
BNB-EXP-100W-EPL03	100W	AC100-277V	MEANWELL	1pc.	EPSTAR or BRIDGELUX COB	3000K - 6000K	80-90Lm/W	8000-9000Lm	120°	IP66	L=300mm W=300mm H=226mm	37,450.00
BNB-EXP-120W-EPL03	120W	AC100-277V	MEANWELL	1pc.	EPSTAR or BRIDGELUX COB	3000K - 6000K	80-90Lm/W	9600-10800Lm	120°	IP66	L=300mm W=300mm H=226mm	40,300.00

Prices are subject to change without prior notice.