



# LED POWER SUPPLY DATASHEET

## SNP60-12VFB-1

### -DESCRIPTION

Liner and super slime type design, very helpful for the limited space lighting applications, it has advantages in cabinet, furniture and light boxes application, meet new EU directive and ErP request, lifetime reach 30000hrs.



### -Input

Items	Conditions	Request	Note
Input voltage	Ta	AC180-264V	--
Input frequency		50/60Hz	--
Input current		<0.5A	--
Input power	25°C, rated input voltage, output with max. rated power	<70W	--
Efficiency		≥88%	--
Standby	25°C, rated input voltage, output without load	<0.5W	average
Inrush current	25°C, rated input voltage	<75A	peak
PF	25°C, rated input voltage, output max. rated power	≥0.9	--

### -Temperate and others

Items	Conditions	Request	Note
Operation temp.	--	-20-50°C	--
Relative humidity	--	45%-85%	--
Max. case temp.	--	80°C	--
Lifetime	Max.Ta, rated input voltage, output with max.rated power	30,000hr	--
Working noise	25°C, rated input voltage, output with rated power, mute box background noise<35dB, pickup 10cm distance from products	yes	--

### -Protection

Item	Conditions	Request	Note
Open circuit	Ta, rated input voltage, no load	--	--
Over load	Ta, 0.94-1.06 times of input voltage, 2 times of rated power	yes	--
Short circuit	Ta, 0.94-1.06 times of input voltage	yes	--
Over temperature	Ta, 0.94-1.06 times of input voltage, temperature detected pointed more than 115 degree	yes	--
Over voltage	Ta, 0.94-1.06 times of input voltage, output voltage is 1.5 times of rated one	yes	--
Auto recovery	Over load, short circuit revocation	--	--
Latch off	Over load, short circuit, over heat re-start,over voltage after cut off	yes	--

### -Output

Items	Conditions	Request	Note
Startup time	25°C, rated input voltage, output with max. rated power	<0.5S	--
Output voltage and precision	Ta, rated input voltage, output with rated power	12V±5%	--
Output current range	Ta, rated input voltage	0-5A	
Output voltage wave	25°C, rated input voltage, output with max. rated power	500mV	Vp-p
Output overload	25°C, rated input voltage, output with 2 times LED load	yes	--
Output current and precision	Ta, rated input voltage, output with rated power	--	--
Rated output voltage range	Ta, rated input voltage	--	--
Output current wave	25°C, rated input voltage, output with max. rated power	--	Ip-p
Dimming mode	--	--	--
Dimming range	--	--	--


### -Mechanical, mounting

Items	Conditions
Case material and size	Plastic case 302x30x16.7mm
Mounting ways	Built-in
Insulation type	Class II
IP grade	IP20
Connecting way	Push in: 0.75mm <sup>2</sup> (18AWG)-1.5mm <sup>2</sup> (16AWG)
Connecting way	Push in: 0.75mm <sup>2</sup> (18AWG)-1.5mm <sup>2</sup> (16AWG)
Output cables length	--

### -Standard

Items	Conditions
Safety	IEC61347-1, IEC61347-2-13
Harmonic	EN61000-3-2 Class C
EMI	EN55015
EMS	EN61000-4-2, 3, 4, 5, 6 EN61547

## Dimensions(mm)

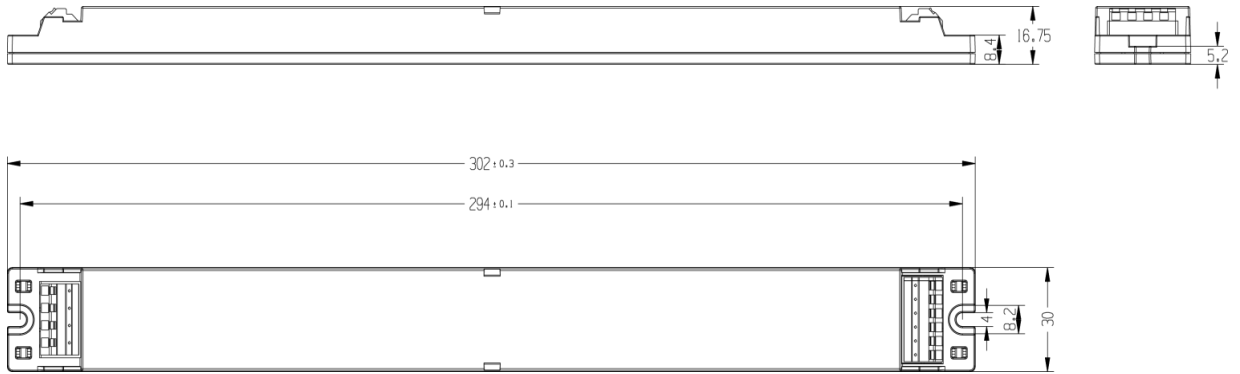

## Wiring Diagram

