



■ Main Features


- High efficiency and compact size
- Active PFC
- Overload 140%
- Usable for application where low line voltage is often present

TECHNICAL DATA

Model type	NPST480-24	
OUTPUT DATA		
Rated voltage	24Vdc	
Adj. output voltage range	23...28Vdc	
Continuous current	20A	
Overload limit	28A	
Short circuit peak current	50A	
Load regulation	≤ 1%	
Ripple & Noise ¹	≤ 50mVpp	
Hold up time	≥ 20ms	
Protections	<ul style="list-style-type: none"> ▪ Overload, short circuit: Hiccup mode ▪ Thermal protection ▪ Output overvoltage 	
Output overvoltage protection	≥ 33Vdc	
Status Signals	<ul style="list-style-type: none"> ▪ DC OK - green LED ▪ OVERLOAD - red LED ▪ DC OK - dry contact (NO, 24Vdc / 1A) 	
Parallel connection	Possible for redundancy (with external ORing module)	
INPUT DATA		
Input AC rated voltage	Nominal: 3 phases, 400...500Vac (UL certified)	
Frequency	Range: 340...550Vac 47...63Hz	
Input DC rated voltage	470...725Vdc	
Input AC rated current	1.3A	
Vin = 400Vac	1.1A	
Vin = 500Vac		
Input DC rated current	1.2A	
Vin = 470Vdc	0.8A	
Vin = 725Vdc		
Power factor correction	Active / > 0.9	
Inrush peak current ² / I ² t	≤ 55A / 2.16A ² s	
Touch (leakage) current	≤ 0.5mA	
Internal protection fuse	None, external fuse must be provided	
Recommended external protection	Fuse 3x 6.3AT or 3x MCB 6A C curve or 3x 4A D curve It is strongly recommended to provide external surge arresters (SPD) according to local regulations.	
GENERAL DATA		
Efficiency	> 92%	
Dissipated power	< 42W	
Operating temperature ³	- 40°C...+ 70°C UL certified up to 45°C	
Derating	-10W/°C over 45°C	
Storage temperature	- 40°C...+ 80°C	
Humidity	5...95% r.H. non condensing	
Life time expectation	65'496h (7.4 years) at 25°C ambient full load	
MTBF	<ul style="list-style-type: none"> ▪ MIL-HDBK-217F > 500'000h at 25°C ambient full load 	
Overvoltage category	<ul style="list-style-type: none"> ▪ EN50178 III 	
Pollution degree	<ul style="list-style-type: none"> ▪ IEC60664-1 2 	
Protection Class	<ul style="list-style-type: none"> ▪ CLASS I 	
Input / output isolation	4.2kVdc	
Input / ground isolation	2.2kVdc	
Output / ground isolation	0.75kVdc	
Safety Standards	<ul style="list-style-type: none"> ▪ UL508 (certified E356563) ▪ IEC/EN61010-1 ▪ IEC/EN61010-2-201 ▪ IEC/EN60950 	
EMC Emission	<ul style="list-style-type: none"> ▪ EN55011 (CISPR11) Class A ▪ EN55022 (CISPR22) Class A ▪ EN61000-3-2 Class A 	
EMC Immunity	<ul style="list-style-type: none"> ▪ EN61000-4-2 Level 3 ▪ EN61000-4-3 Level 3 ▪ EN61000-4-4 Level 4 ▪ EN61000-4-5 Level 3 ▪ EN61000-4-11 Level 2 	
Protection degree	<ul style="list-style-type: none"> ▪ EN60529 IP20 	
Vibration sinusoidal	<ul style="list-style-type: none"> ▪ IEC 60068-2-6 (5-17.8Hz: ±1.6mm; 17.8-500Hz: 2g 2hours / axis (X,Y,Z) 	
Shock	<ul style="list-style-type: none"> ▪ IEC 60068-2-27 (30g 6ms, 20g 11ms; 3 bumps / direction, 18 bumps total) 	

Connection terminals	2.5mm ² , screw type pluggable (24...12AWG)
Case material	Aluminum
Weight	1.0kg
Size (W x H x D)	73.0 x 140.0 x 125.0mm
<p>1) Ripple and Noise are measured with 20MHz bandwidth, probe terminated with a 0.1µF MKP parallel capacitor. 2) Peak current measured after 0.2ms from main connection; 400Vac/50Hz; Ambient temperature at 25°C; Cold Start. 3) Start-up type tested: - 40°C, possible at nominal voltage with load deration.</p> <p>Notes: - Technical parameters are typical, measured in laboratory environment at 25°C and 400Vac / 50Hz, at nominal values, after minimum 5 minutes of operation. - Power rating, losses, efficiency, ripple, thermal behaviour and start-up may change outside of the nominal rated input range. Contact factory for details. - Data may change without prior notice in order to improve the product.</p>	

DIMENSIONS

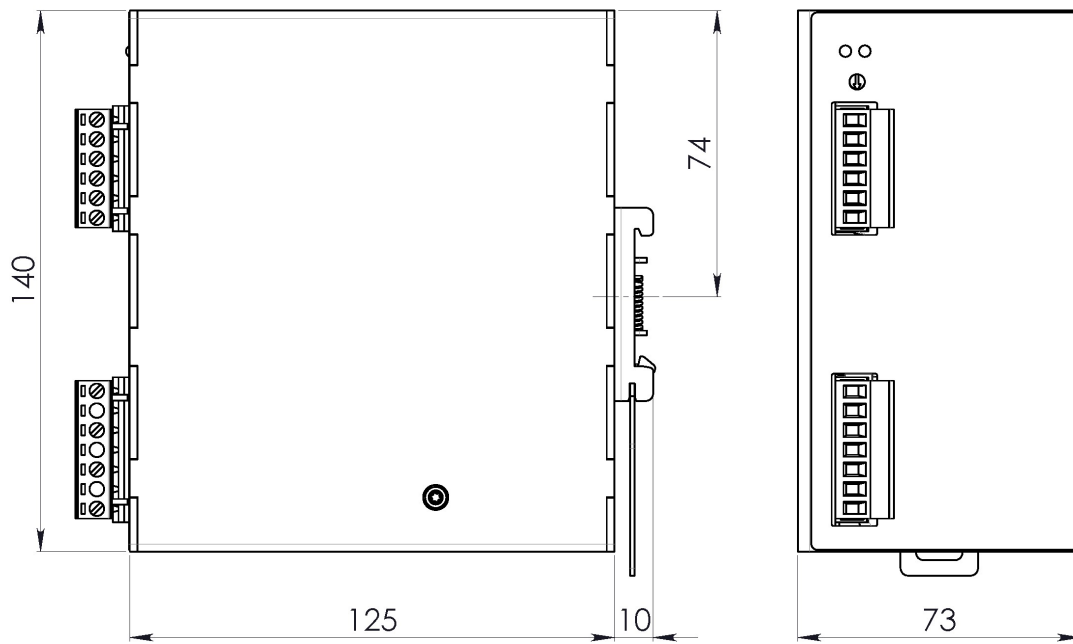

CONNECTION



Input Connection:

3 phases:

- L1 = phase 1
- L2 = phase 2
- L3 = phase 3
- ⊕ = Earth ground

DC:

- L1 = + Positive DC
- L2 = - Negative DC
- L3 = do not connect
- ⊕ = Earth ground

Output Connection:

- + = Positive DC
- - = Negative DC

Signalling:

- DC OK: dry contact
- NO
- COM