

# PRIAM PCE 211/M1 GRIS R.7001 PA 0.84KG

Ver 1.7		Revision Date: 02/13/2020		DS Number: 02000003184	Date of last issue: 02/08/2019 Date of first issue: 06/03/2017
SEC	TION 1. I	DENTIFICATION			
1.1 F	Product i	dentifier			
	Trade na	ame	:	PRIAM PCE 211/M	11 GRIS R.7001 P.A
	Identifica	ation of the article	:	049160705R	
1.2 F		identified uses of th he Substance/Mix-	ie s :	substance or mixtu Industrial paint	re and uses advised against
1.3 F	Relevant Supp				
		Company Address	:	Dysol, Inc. dba Soc 791 Westport Parky Fort Worth, TX 761	vay
		Telephone Email Website	:	1-817-335-1826 techsupport-na@sc	
	Manu	facturer			
		Company Address	:	MÄDER AERO Rue Jean Baptiste I FR – 61300 L'AIGL	
		Telephone Email	:	+33320127950 products-safety.ma	der-france@mader-group.com
1.4 E		<b>cy telephone numbe</b> ncy telephone   :	er	CHEMTEL: +1-813-24	48-0585 (International); 1-800-255-3924 (USA)

### SECTION 2. HAZARDS IDENTIFICATION

#### GHS classification in accordance with 29 CFR 1910.1200

Flammable liquids	:	Category 3
Skin irritation	:	Category 2
Eye irritation	:	Category 2A
Skin sensitisation	:	Category 1
Reproductive toxicity	:	Category 2
Specific target organ toxicity - single exposure	:	Category 3 (Respiratory system)
Specific target organ toxicity - repeated exposure	:	Category 2



Version 1.7	Revision Date: 02/13/2020	SDS Number: 102000003184	Date of last issue: 02/08/2019 Date of first issue: 06/03/2017
GHS la	abel elements		
Hazar	rd pictograms		
Signa	l word	: Warning	• •
Hazar	rd statements	H315 Causes s H317 May caus H319 Causes s H335 May caus H361d Suspec	se an allergic skin reaction. serious eye irritation. se respiratory irritation. ted of damaging the unborn child. se damage to organs through prolonged or re-
Preca	utionary statements	Prevention:	
		P201 Obtain sp P202 Do not ha and understood P210 Keep aw No smoking. P233 Keep cor P240 Ground/b P241 Use expl ment. P242 Use only P243 Take pre P260 Do not br P264 Wash ski P271 Use only P272 Contamir the workplace.	ay from heat/ sparks/ open flames/ hot surfaces. tainer tightly closed. bond container and receiving equipment. osion-proof electrical/ ventilating/ lighting equip- non-sparking tools. cautionary measures against static discharge. reathe dust/ fume/ gas/ mist/ vapours/ spray. n thoroughly after handling. outdoors or in a well-ventilated area. hated work clothing must not be allowed out of tective gloves/ protective clothing/ eye protection
		Response:	
		all contaminate P304 + P340 + and keep comf doctor if you fe P305 + P351 + for several min to do. Continue P308 + P313 If tention. P333 + P313 If attention.	P338 IF IN EYES: Rinse cautiously with water utes. Remove contact lenses, if present and easy



## PRIAM PCE 211/M1 GRIS R.7001 PA 0.84KG

ersion .7	Revision Date: 02/13/2020	SDS Number: 102000003184	Date of last issue: 02/08/2019 Date of first issue: 06/03/2017			
		P370 + P378 li	contaminated clothing and wash before reuse. n case of fire: Use dry sand, dry chemical or alco- am to extinguish.			
		tightly closed.	2233 Store in a well-ventilated place. Keep container osed. 2235 Store in a well-ventilated place. Keep cool.			
		Disposal:				
		P501 Dispose posal plant.	of contents/ container to an approved waste dis-			

The following percentage of the mixture consists of ingredient(s) with unknown acute toxicity: 19 %

### Other hazards

None known.

### SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Components		
Chemical name	CAS-No.	Concentration (% w/w)
Xylene	1330-20-7	>= 20 - < 30
Titanium dioxide	13463-67-7	>= 10 - < 20
Poly[2-(chloromethyl)oxirane-alt-4,4'- (propane-2,2-diyl)diphenol]	25068-38-6	>= 10 - < 20
2-Butoxyethanol	111-76-2	>= 5 - < 10
calcaire	1317-65-3	>= 5 - < 10
Talc (Mg3H2(SiO3)4)	14807-96-6	>= 1 - < 5
Ethylbenzene	100-41-4	>= 1 - < 5
1-Butanol	71-36-3	>= 1 - < 5
Zinc oxide	1314-13-2	>= 1 - < 5
Carbon black	1333-86-4	>= 0.1 - < 1
Toluene	108-88-3	>= 0.1 - < 1

Actual concentration is withheld as a trade secret

### SECTION 4. FIRST AID MEASURES

General advice	:	Move out of dangerous area. Show this safety data sheet to the doctor in attendance. Do not leave the victim unattended.
If inhaled	:	If unconscious, place in recovery position and seek medical advice.
In case of skin contact	:	If symptoms persist, call a physician. If skin irritation persists, call a physician. If on skin, rinse well with water. If on clothes, remove clothes.



## PRIAM PCE 211/M1 GRIS R.7001 PA 0.84KG

Version 1.7	Revision Date: 02/13/2020	SDS Number: 102000003184	Date of last issue: 02/08/2019 Date of first issue: 06/03/2017
In ca	se of eye contact	Remove conta Protect unhar Keep eye wide	
lf swa	allowed	Never give an If symptoms p	bry tract clear. ilk or alcoholic beverages. ything by mouth to an unconscious person. ersist, call a physician. Imediately to hospital.
	important symptoms effects, both acute and /ed	Causes seriou May cause res Suspected of	ritation. allergic skin reaction. is eye irritation. spiratory irritation. damaging the unborn child. mage to organs through prolonged or repeated
Note	s to physician	: No information	n available.

### SECTION 5. FIREFIGHTING MEASURES

Suitable extinguishing media	:	Alcohol-resistant foam Carbon dioxide (CO2) Dry chemical
Unsuitable extinguishing me- dia	:	·····
Specific hazards during fire- fighting	:	Do not allow run-off from fire fighting to enter drains or water courses.
Hazardous combustion prod- ucts	:	No hazardous combustion products are known
Further information	:	Collect contaminated fire extinguishing water separately. This must not be discharged into drains. Fire residues and contaminated fire extinguishing water must be disposed of in accordance with local regulations. For safety reasons in case of fire, cans should be stored sepa- rately in closed containments. Use a water spray to cool fully closed containers.
Special protective equipment for firefighters	:	In the event of fire, wear self-contained breathing apparatus.

### SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protec- : tive equipment and emer- gency procedures	Use personal protective equipment. Remove all sources of ignition. Evacuate personnel to safe areas. Beware of vapours accumulating to form explosive concentra- tions. Vapours can accumulate in low areas.
Environmental precautions	Prevent product from entering drains. Prevent further leakage or spillage if safe to do so. If the product contaminates rivers and lakes or drains inform respective authorities.



Vers 1.7	sion	Revision Date: 02/13/2020		9S Number: 2000003184	Date of last issue: 02/08/2019 Date of first issue: 06/03/2017
		ls and materials for ment and cleaning up	:	bent material, (e.g	and then collect with non-combustible absor- g. sand, earth, diatomaceous earth, vermicu- container for disposal according to local / na- (see section 13).
SEC	TION 7.	HANDLING AND STO	RA	GE	
		on protection against l explosion	:	Take necessary a (which might caus	naked flame or any incandescent material. ction to avoid static electricity discharge e ignition of organic vapours). open flames, hot surfaces and sources of ig-
	Advice	on safe handling	:	Avoid contact with For personal prote Smoking, eating a cation area. Take precautional Provide sufficient Open drum carefu	pours/dust. obtain special instructions before use.
	Conditio	ons for safe storage	:	No smoking. Keep container tig place. Containers which kept upright to pre Observe label pre	cautions. ons / working materials must comply with
	Further age sta	information on stor- bility	:		i if stored and applied as directed.



# PRIAM PCE 211/M1 GRIS R.7001 PA 0.84KG

Version Revision Date: 1.7

02/13/2020

SDS Number: 10200003184

Date of last issue: 02/08/2019 Date of first issue: 06/03/2017

## SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

### Components with workplace control parameters

Components	CAS-No.	Value type (Form of ex-	Control parame- ters / Permissible	Basis
Xylene	1330-20-7	posure) TWA	concentration 100 ppm 435 mg/m3	OSHA Z-1
		TWA	100 ppm	ACGIH
		STEL	150 ppm	ACGIH
		STEL	150 ppm	OSHA P0
		0.22		
		TWA	100 ppm	OSHA P0
Titanium dioxide	13463-67-7	655 mg/m3TWA100 ppm 435 mg/m3TWA (total dust)15 mg/m3TWA (total dust)10 mg/m3 (Titanium di (Titanium di 20 ppmTWA10 mg/m3 (Titanium di 20 ppmTWA20 ppmTWA5 ppm 24 mg/m3TWA50 ppm 240 mg/m3TWA50 ppm 240 mg/m3TWA50 ppm 240 mg/m3TWA50 ppm 240 mg/m3TWA50 ppm 240 mg/m3TWA50 ppm 240 mg/m3TWA (total 		OSHA Z-1
			10 mg/m3	OSHA P0
		TWA	10 mg/m3 (Titanium dioxide)	ACGIH
2-Butoxyethanol	111-76-2		20 ppm	ACGIH
		TWA		NIOSH REL
		TWA		OSHA Z-1
		TWA		OSHA P0
calcaire	1317-65-3		15 mg/m3	OSHA Z-1
			5 mg/m3	OSHA Z-1
			15 mg/m3	OSHA P0
		able dust	5 mg/m3	OSHA P0
			5 mg/m3 (Calcium car- bonate)	NIOSH REL
		TWA (total)	10 mg/m3 (Calcium car- bonate)	NIOSH REL
Talc (Mg3H2(SiO3)4)	14807-96-6	TWA (Dust)	20 Million parti- cles per cubic foot	OSHA Z-3
		TWA (respir- able dust fraction)	2 mg/m3	OSHA P0
		TWA (Res- pirable)	2 mg/m3	NIOSH REL
		TWA	0.1 fibres per cu- bic centimeter	ACGIH
			2 mg/m3	ACGIH



sion	Revision Date: 02/13/2020	SDS Number: 102000003184		issue: 02/08/2019 issue: 06/03/2017	
			TWA (Res- pirable par- ticulate mat- ter)		
Ethyl	benzene	100-41-4	TWA	20 ppm	ACGIH
			TWA	100 ppm 435 mg/m3	NIOSH RE
			ST	125 ppm 545 mg/m3	NIOSH RE
			TWA	100 ppm 435 mg/m3	OSHA Z-1
			TWA	100 ppm 435 mg/m3	OSHA P0
			STEL	125 ppm 545 mg/m3	OSHA P0
1-But	tanol	71-36-3	TWA	20 ppm	ACGIH
			С	50 ppm 150 mg/m3	NIOSH RE
			TWA	100 ppm 300 mg/m3	OSHA Z-1
<u></u> .			C	50 ppm 150 mg/m3	OSHA P0
Zinc o	oxide	1314-13-2	TWA (Res- pirable par- ticulate mat- ter)	2 mg/m3	ACGIH
			STEL (Res- pirable par- ticulate mat- ter)	10 mg/m3	ACGIH
			TWA (Dust)	5 mg/m3	NIOSH RE
			TWA (Fumes)	5 mg/m3	NIOSH RE
			ST (Fumes)	10 mg/m3	NIOSH RE
			C (Dust)	15 mg/m3	NIOSH RE
			TWA (total dust)	15 mg/m3	OSHA Z-1
			TWA (respir- able fraction)	5 mg/m3	OSHA Z-1
			TWA (Fumes)	5 mg/m3	OSHA Z-1
			TWA (Total dust)	10 mg/m3	OSHA P0
			TWA (respir- able dust fraction)	5 mg/m3	OSHA P0
			TWA (Fumes)	5 mg/m3	OSHA P0
			STEL (Fumes)	10 mg/m3	OSHA P0
Carbo	on black	1333-86-4	TWA (Inhala- ble particu- late matter)	3 mg/m3	ACGIH



# PRIAM PCE 211/M1 GRIS R.7001 PA 0.84KG

Vers 1.7		vision Date: 13/2020	SDS Num 10200000			issue: 02/08/2019 issue: 06/03/2017	
					TWA	3.5 mg/m3	NIOSH REL
					TWA	3.5 mg/m3	OSHA Z-1
					TWA	3.5 mg/m3	OSHA P0
					TWA	0.1 mg/m3 (PAHs)	NIOSH REL
	Toluene		108-88	3-3	TWA	20 ppm	ACGIH
					TWA	100 ppm 375 mg/m3	NIOSH REL
					ST	150 ppm 560 mg/m3	NIOSH REL
					TWA	200 ppm	OSHA Z-2
					CEIL	300 ppm	OSHA Z-2
					Peak	500 ppm (10 minutes)	OSHA Z-2
					TWA	100 ppm 375 mg/m3	OSHA P0
					STEL	150 ppm 560 mg/m3	OSHA P0

### **Biological occupational exposure limits**

Components	CAS-No.	Control pa- rameters	Biological specimen	Sam- pling time	Permissible concentra- tion	Basis
Xylene	1330-20-7	Methylhip- puric acids	Urine	End of shift (As soon as possible after ex- posure ceases)	1.5 g/g cre- atinine	ACGIH BEI
2-Butoxyethanol	111-76-2	Butoxyace- tic acid (BAA)	Urine	End of shift (As soon as possible after ex- posure ceases)	200 mg/g Creatinine	ACGIH BEI
Toluene	108-88-3	Toluene	In blood	Prior to last shift of work- week	0.02 mg/l	ACGIH BEI
		Toluene	Urine	End of shift (As soon as possible after ex- posure ceases)	0.03 mg/l	ACGIH BEI



# PRIAM PCE 211/M1 GRIS R.7001 PA 0.84KG

Version 1.7	Revision Date: 02/13/2020	SDS Number: 102000003184	Date of last issue: 02/08/2019 Date of first issue: 06/03/2017				
Personal protective equipment							
Respiratory protection		: In the case of proved filter.	In the case of vapour formation use a respirator with an ap- proved filter.				
Hand protection							
Remarks			The suitability for a specific workplace should be discussed with the producers of the protective gloves.				
Eye protection		: Eye wash bot Tightly fitting s	tle with pure water safety goggles ield and protective suit for abnormal processing				
Skin and body protection		Choose body	Impervious clothing Choose body protection according to the amount and con- centration of the dangerous substance at the work place.				
Hygiene measures		: When using d When using d	o not eat or drink.				

### SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance	:	liquid
Colour	:	grey
Odour	:	solvent-like
рН	:	Not applicable
Melting point/freezing point	:	Not applicable
Boiling point/boiling range	:	> 97 °F / > 36 °C
Flash point	:	ca. 73 °F / 23 °C
E		No. John St. Walter
Evaporation rate	:	No data available
Self-ignition	:	No data available
Upper explosion limit / Upper flammability limit	:	No data available
Lower explosion limit / Lower flammability limit	:	No data available
Vapour pressure	:	< 1,000 hPa (122 °F / 50 °C)
Relative vapour density	:	No data available
Density	:	ca. 1.48 g/cm3 (73 °F / 23 °C)
Solubility(ies) Water solubility	:	immiscible



# PRIAM PCE 211/M1 GRIS R.7001 PA 0.84KG

Version 1.7	Revision Date: 02/13/2020		S Number: 2000003184	Date of last issue: 02/08/2019 Date of first issue: 06/03/2017			
Partition coefficient: n-oc- tanol/water Auto-ignition temperature		:	<ul><li>No data available</li><li>No data available</li></ul>				
Decomposition temperature		:	: Not applicable				
Viscosity Viscosity, dynamic		:	No data available	9			
Viscosity, kinematic		:	> 20.6 mm2/s (1	04 °F / 40 °C)			
Explosive properties		:	No data available	9			
Oxidizing properties		:	No data available	9			

### SECTION 10. STABILITY AND REACTIVITY

Reactivity Chemical stability Possibility of hazardous reac- tions	:	
Conditions to avoid Incompatible materials	:	Heat, flames and sparks. Strong oxidizing agents Strong oxidizing agents
Hazardous decomposition products	:	Stable under recommended storage conditions.

### SECTION 11. TOXICOLOGICAL INFORMATION

#### Acute toxicity

Not classified based on available information.

#### Product:

Acute oral toxicity	:	Acute toxicity estimate: > 5,000 mg/kg Method: Calculation method
Acute inhalation toxicity	:	Acute toxicity estimate: 28.72 mg/l Exposure time: 4 h Test atmosphere: vapour Method: Calculation method
Acute dermal toxicity	:	Acute toxicity estimate: 3,314 mg/kg Method: Calculation method



/ersion I.7	Revision Date: 02/13/2020	SDS Number: 102000003184	Date of last issue: 02/08/2019 Date of first issue: 06/03/2017		
<u>Comp</u>	onents:				
Zinc o	oxide:				
Acute	e oral toxicity	: LD50 (Rat):	> 15,000 mg/kg		
		LD50 Oral (	Mouse): 7,950 mg/kg		
Acute	inhalation toxicity	: LC50 (Rat): Exposure tir Test atmosp			
	orrosion/irritation				
Cause	es skin irritation.				
<u>Produ</u>					
Rema	arks	: May cause s	skin irritation in susceptible persons.		
Seriou	us eye damage/eye i	rritation			
Cause	es serious eye irritation	۱.			
<u>Produ</u>					
Rema	arks	: May cause i	rreversible eye damage.		
Respi	ratory or skin sensit	isation			
-	ensitisation				
May cause an allergic skin reaction.					
Respi	ratory sensitisation				
Not cla	assified based on ava	ilable information.			
Germ	cell mutagenicity				
Not cla	assified based on ava	ilable information.			
Carcir	nogenicity				
	assified based on ava				
IARC	Talc (Mg3H	arcinogenic to huma I2(SiO3)4)	14807-96-6		
	Group 2B: Titanium di	Possibly carcinoger	nic to humans 13463-67-7		
	Group 2B:	Possibly carcinoger	nic to humans		
	Ethylbenze Group 2B:	ne Possibly carcinoger	100-41-4 nic to humans		
	Carbon bla	ck	1333-86-4		
OSH		nent of this product	present at levels greater than or equal to 0.1% is rcinogens.		
NTP	Talc (Mg3H	e human carcinoge I2(SiO3)4) stalline (Respirable	14807-96-6		



## PRIAM PCE 211/M1 GRIS R.7001 PA 0.84KG

Version	Revision Date:	SDS Number:	Date of last issue: 02/08/2019
1.7	02/13/2020	102000003184	Date of first issue: 06/03/2017

## Reproductive toxicity

Suspected of damaging the unborn child.

#### STOT - single exposure

May cause respiratory irritation.

#### STOT - repeated exposure

May cause damage to organs through prolonged or repeated exposure.

#### Aspiration toxicity

Not classified based on available information.

#### **Further information**

#### Product:

Remarks

: Solvents may degrease the skin.

### **SECTION 12. ECOLOGICAL INFORMATION**

### Ecotoxicity

No data available

#### Persistence and degradability

No data available

#### Bioaccumulative potential

No data available

## Mobility in soil

No data available

#### Other adverse effects

### Product:

Ozone-Depletion Potential	:	Regulation: 40 CFR Protection of Environment; Part 82 Pro- tection of Stratospheric Ozone - CAA Section 602 Class I Substances Remarks: This product neither contains, nor was manufac- tured with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A + B).
Additional ecological infor- mation	:	An environmental hazard cannot be excluded in the event of unprofessional handling or disposal. Harmful to aquatic life with long lasting effects.



# PRIAM PCE 211/M1 GRIS R.7001 PA 0.84KG

Version 1.7	Revision Date: 02/13/2020	SDS Number: 102000003184	Date of last issue: 02/08/2019 Date of first issue: 06/03/2017					
SECTION	SECTION 13. DISPOSAL CONSIDERATIONS							
Dispo	sal methods							
Waste from residues		courses or the Do not contam cal or used cor	inate ponds, waterways or ditches with chemi-					
Contaminated packaging		: Empty remaini Dispose of as Do not re-use						

## **SECTION 14. TRANSPORT INFORMATION**

### International Regulations

<b>UNRTDG</b> UN number Proper shipping name Class Packing group Labels	 UN 1263 PAINT 3 III 3
IATA-DGR UN/ID No. Proper shipping name Class Packing group Labels Packing instruction (cargo aircraft) Packing instruction (passen- ger aircraft)	 UN 1263 PAINT 3 III Flammable Liquids 366 355
IMDG-Code UN number Proper shipping name Class Packing group Labels EmS Code Marine pollutant	 UN 1263 PAINT (trizinc bis(orthophosphate), reaction product: bisphenol-A- (epichlorhydrin); epoxy resin (number average molecular weight <= 700)) 3 III 3 F-E, <u>S-E</u> yes

## Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied.



## PRIAM PCE 211/M1 GRIS R.7001 PA 0.84KG

Version	Revision Date:	SDS Number:	Date of last issue: 02/08/2019
1.7	02/13/2020	102000003184	Date of first issue: 06/03/2017

### National Regulations

49 CFR		
UN/ID/NA number	:	UN 1263
Proper shipping name	:	PAINT
Class	:	3
Packing group	:	
Labels	:	FLAMMABLE LIQUID
ERG Code	:	128
Marine pollutant	:	yes(trizinc bis(orthophosphate), reaction product: bisphenol-A- (epichlorhydrin); epoxy resin (number average molecular weight <= 700))

#### Special precautions for user

The transport classification(s) provided herein are for informational purposes only, and solely based upon the properties of the unpackaged material as it is described within this Safety Data Sheet. Transportation classifications may vary by mode of transportation, package sizes, and variations in regional or country regulations.

#### SECTION 15. REGULATORY INFORMATION

#### EPCRA - Emergency Planning and Community Right-to-Know Act

Components	CAS-No.	Component RQ	Calculated product RQ
		(lbs)	(lbs)
Xylene	1330-20-7	100	478
Xylene	1330-20-7	100	100 (F003)
Ethylbenzene	100-41-4	100	100 (F003)
1-Butanol	71-36-3	100	100 (F003)
Methyl isobutyl ketone	108-10-1	100	100 (F003)
Toluene	108-88-3	100	100 (F005)
2-Methyl-1-propanol	78-83-1	100	100 (F005)
2-Butanone	78-93-3	100	100 (F005)
2-Butanone	78-93-3	5,000	5,000 (D035)

#### **CERCLA Reportable Quantity**

#### SARA 304 Extremely Hazardous Substances Reportable Quantity

This material does not contain any components with a section 304 EHS RQ.

### SARA 302 Extremely Hazardous Substances Threshold Planning Quantity

This material does not contain any components with a section 302 EHS TPQ.

SARA 311/312 Hazards	:	Flammable (gases, aerosols, liquids, or solids)
		Respiratory or skin sensitisation
		Reproductive toxicity
		Specific target organ toxicity (single or repeated exposure)
		Skin corrosion or irritation
		Serious eye damage or eye irritation



## PRIAM PCE 211/M1 GRIS R.7001 PA 0.84KG

Version 1.7	Revision Date: 02/13/2020		DS Number: 2000003184	Date of last issue: 02 Date of first issue: 06	
SARA 313		:	: The following components are subject to reporting levels e tablished by SARA Title III, Section 313:		
			Zinc(II) phos- phate	7779-90-0	>= 10 - < 20 %
			2-Butoxyethanol	111-76-2	>= 5 - < 10 %
			Ethylbenzene	100-41-4	>= 1 - < 5 %
			1-Butanol	71-36-3	>= 1 - < 5 %
			Zinc oxide	1314-13-2	>= 1 - < 5 %
			1,3,5-triazine- 2,4,6(1H,3H,5H)- trione, zinc salt	24468-28-8	>= 1 - < 5 %

#### Clean Air Act

This product neither contains, nor was manufactured with a Class I or Class II ODS as defined by the U.S. Clean Air Act Section 602 (40 CFR 82, Subpt. A, App.A + B). The following chemical(s) are listed as HAP under the U.S. Clean Air Act, Section 112 (40 CFR 61):

Xylene	1330-20-7	>= 20 - < 30 %
Ethylbenzene	100-41-4	>= 1 - < 5 %

This product does not contain any chemicals listed under the U.S. Clean Air Act Section 112(r) for Accidental Release Prevention (40 CFR 68.130, Subpart F).

The following chemical(s) are listed under the U.S. Clean Air Act Section 111 SOCMI Intermediate or Final VOC's (40 CFR 60.489):

Xylene	1330-20-7	>= 20 - < 30 %
2-Butoxyethanol	111-76-2	>= 5 - < 10 %
Ethylbenzene	100-41-4	>= 1 - < 5 %
1-Butanol	71-36-3	>= 1 - < 5 %

#### **Clean Water Act**

The following Hazardous Substances are listed under the U.S. CleanWater Act, Section 311, Table 116.4A:

Xylene	1330-20-7	>= 20 - < 30 %
Ethylbenzene	100-41-4	>= 1 - < 5 %
Toluene	108-88-3	>= 0.1 - < 1 %
ving Hazardaya (	Chamicala are listed under the LLC	Clean Water Act Section 211 Tak

The following Hazardous Chemicals are listed under the U.S. CleanWater Act, Section 311, Table 117.3:

Xylene	1330-20-7	>= 20 - < 30 %
Ethylbenzene	100-41-4	>= 1 - < 5 %
Toluene	108-88-3	>= 0.1 - < 1 %
duct contains the follow	ing toxic pollutopto listed up	denthe LLC Clean Water Act C

This product contains the following toxic pollutants listed under the U.S. Clean Water Act Section 307

Zinc(II) phosphate	7779-90-0	>= 10 - < 20 %
Ethylbenzene	100-41-4	>= 1 - < 5 %
Zinc oxide	1314-13-2	>= 1 - < 5 %
1,3,5-triazine-	24468-28-8	>= 1 - < 5 %
2,4,6(1H,3H,5H)-trione,		
zinc salt		



## PRIAM PCE 211/M1 GRIS R.7001 PA 0.84KG

rsion	Revision Date: 02/13/2020	SDS Number: 102000003184	Date of last issue: 0 Date of first issue: 0	
This pr	oduct contains the foll Ethylbenzene	lowing priority pollutar 100-41-4	its related to the U.S. C	lean Water Act: = 1 - < 5 %
US Sta	ate Regulations			
Massa	chusetts Right To K	now		
	Xylene Titanium dioxide 2-Butoxyethanol calcaire Talc (Mg3H2(SiO Ethylbenzene 1-Butanol Zinc oxide	3)4)		1330-20-7 13463-67-7 111-76-2 1317-65-3 14807-96-6 100-41-4 71-36-3 1314-13-2
Penns	ylvania Right To Kno	w		
	Xylene Titanium dioxide Zinc(II) phosphate Poly[2-(chloromer nol] 2-Butoxyethanol calcaire Talc (Mg3H2(SiO Ethylbenzene 1-Butanol Zinc oxide 1,3,5-triazine-2,4 Toluene 2-Methyl-1-propa	e thyl)oxirane-alt-4,4'-(p )3)4) ,6(1H,3H,5H)-trione, z nol <b>Concern</b>		1330-20-7 13463-67-7 7779-90-0 25068-38-6 111-76-2 1317-65-3 14807-96-6 100-41-4 71-36-3 1314-13-2 24468-28-8 108-88-3 78-83-1
	-		laine Chemicals of High	Concern:
Maine	Chemicals of High C Toluene	Concern		108-88-3
Vermo	ont Chemicals of Hig	h Concern		
	Ethylbenzene Toluene 2-Butanone			100-41-4 108-88-3 78-93-3
Washi	ngton Chemicals of	High Concern		
	Ethylbenzene Toluene 2-Butanone			100-41-4 108-88-3 78-93-3

WARNING: This product can expose you to chemicals including Titanium dioxide, Talc (Mg3H2(SiO3)4), Ethylbenzene, Carbon black, Methyl isobutyl ketone, which is/are known to the State of California to cause cancer, and

Toluene, Methyl isobutyl ketone, which is/are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



# PRIAM PCE 211/M1 GRIS R.7001 PA 0.84KG

Version 1.7	Revision Date: 02/13/2020	SDS Number: 102000003184	Date of last issue: 02/08/2019 Date of first issue: 06/03/2017
Califo	ornia List of Hazardo	us Substances	
	Xylene	1.	1330-20-7
	Zinc(II) phospha		7779-90-0
	2-Butoxyethanol		111-76-2 14807-96-6
	Talc (Mg3H2(Si	J3)4)	14807-96-6 100-41-4
	Ethylbenzene 1-Butanol		71-36-3
	Zinc oxide		1314-13-2
		1,6(1H,3H,5H)-trione,	
Califo	ornia Permissible Ex	posure Limits for Ch	nemical Contaminants
	Xylene		1330-20-7
	Titanium dioxide	•	13463-67-7
	2-Butoxyethanol		111-76-2
	calcaire		1317-65-3
	Talc (Mg3H2(Si	D3)4)	14807-96-6
	Ethylbenzene		100-41-4
	1-Butanol		71-36-3
	Zinc oxide		1314-13-2
Califo	ornia Regulated Carc	inoaens	
	Talc (Mg3H2(Si	•	14807-96-6
		, ,	
		-	in the following inventories:
TSC	4	: Substance(s)	not listed on TSCA inventory
DSL			contains the following components that are not lian DSL nor NDSL. s substance
		minéraux du	groupe de la chlorite
		polyamine an	nide salt
		calcaire	
		dolomite	
TECA	liat		

**TSCA** list

No substances are subject to a Significant New Use Rule.

No substances are subject to TSCA 12(b) export notification requirements.



# PRIAM PCE 211/M1 GRIS R.7001 PA 0.84KG

Version	Revision Date:	SDS Number:	Date of last issue: 02/08/2019				
1.7	02/13/2020	102000003184	Date of first issue: 06/03/2017				


### **SECTION 16. OTHER INFORMATION**

#### **Further information**





the absence of a chronic hazard.

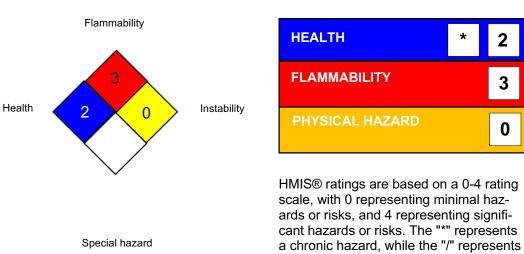

### Full text of other abbreviations

ACGIH	:	USA. ACGIH Threshold Limit Values (TLV)
ACGIH BEI		ACGIH - Biological Exposure Indices (BEI)
NIOSH REL		USA. NIOSH Recommended Exposure Limits
OSHA P0	:	USA. OSHA - TABLE Z-1 Limits for Air Contaminants -
	•	1910.1000
OSHA Z-1		USA. Occupational Exposure Limits (OSHA) - Table Z-1 Lim-
0311A Z-1	•	its for Air Contaminants
OSHA Z-2		USA. Occupational Exposure Limits (OSHA) - Table Z-2
OSHA Z-3	•	USA. Occupational Exposure Limits (OSHA) - Table Z-3 Min-
		eral Dusts
ACGIH / TWA	:	8-hour, time-weighted average
ACGIH / STEL	:	Short-term exposure limit
NIOSH REL / TWA	:	Time-weighted average concentration for up to a 10-hour
		workday during a 40-hour workweek
NIOSH REL / ST	:	STEL - 15-minute TWA exposure that should not be exceeded
		at any time during a workday
NIOSH REL / C	:	Ceiling value not be exceeded at any time.
OSHA P0 / TWA	:	8-hour time weighted average
OSHA P0 / STEL	:	Short-term exposure limit
OSHA P0 / C	:	Ceiling limit
OSHA Z-1 / TWA	:	8-hour time weighted average
OSHA Z-2 / TWA	:	
OSHA Z-2 / CEIL	:	Acceptable ceiling concentration
OSHA Z-2 / Peak		Acceptable maximum peak above the acceptable ceiling con-
	•	centration for an 8-hr shift
OSHA Z-3 / TWA		8-hour time weighted average
	•	



## PRIAM PCE 211/M1 GRIS R.7001 PA 0.84KG

Version	Revision Date:	SDS Number:	Date of last issue: 02/08/2019
1.7	02/13/2020	102000003184	Date of first issue: 06/03/2017

AICS - Australian Inventory of Chemical Substances; ASTM - American Society for the Testing of Materials; bw - Body weight; CERCLA - Comprehensive Environmental Response, Compensation, and Liability Act; CMR - Carcinogen, Mutagen or Reproductive Toxicant; DIN - Standard of the German Institute for Standardisation; DOT - Department of Transportation; DSL - Domestic Substances List (Canada); ECx - Concentration associated with x% response; EHS - Extremely Hazardous Substance; ELx - Loading rate associated with x% response; EmS - Emergency Schedule; ENCS - Existing and New Chemical Substances (Japan); ErCx - Concentration associated with x% growth rate response; ERG - Emergency Response Guide; GHS - Globally Harmonized System; GLP - Good Laboratory Practice; HMIS - Hazardous Materials Identification System; IARC - International Agency for Research on Cancer; IATA - International Air Transport Association; IBC - International Code for the Construction and Equipment of Ships carrying Dangerous Chemicals in Bulk; IC50 - Half maximal inhibitory concentration; ICAO - International Civil Aviation Organization; IECSC - Inventory of Existing Chemical Substances in China; IMDG - International Maritime Dangerous Goods; IMO - International Maritime Organization; ISHL - Industrial Safety and Health Law (Japan); ISO - International Organisation for Standardization; KECI - Korea Existing Chemicals Inventory; LC50 - Lethal Concentration to 50 % of a test population; LD50 - Lethal Dose to 50% of a test population (Median Lethal Dose); MARPOL - International Convention for the Prevention of Pollution from Ships; MSHA - Mine Safety and Health Administration; n.o.s. - Not Otherwise Specified; NFPA - National Fire Protection Association; NO(A)EC - No Observed (Adverse) Effect Concentration; NO(A)EL - No Observed (Adverse) Effect Level; NOELR - No Observable Effect Loading Rate; NTP - National Toxicology Program; NZIoC - New Zealand Inventory of Chemicals; OECD - Organization for Economic Co-operation and Development; OPPTS - Office of Chemical Safety and Pollution Prevention; PBT - Persistent, Bioaccumulative and Toxic substance; PICCS - Philippines Inventory of Chemicals and Chemical Substances; (Q)SAR - (Quantitative) Structure Activity Relationship; RCRA - Resource Conservation and Recovery Act; REACH - Regulation (EC) No 1907/2006 of the European Parliament and of the Council concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals; RQ - Reportable Quantity; SADT - Self-Accelerating Decomposition Temperature; SARA - Superfund Amendments and Reauthorization Act; SDS -Safety Data Sheet; TCSI - Taiwan Chemical Substance Inventory; TSCA - Toxic Substances Control Act (United States); UN - United Nations; UNRTDG - United Nations Recommendations on the Transport of Dangerous Goods; vPvB - Very Persistent and Very Bioaccumulative

**Revision Date** 

: 02/13/2020

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

US / EN