
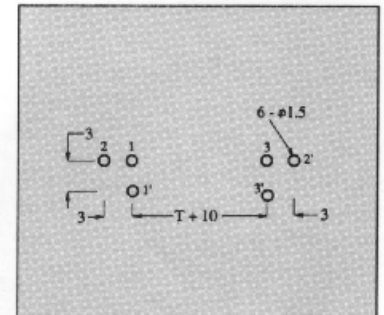
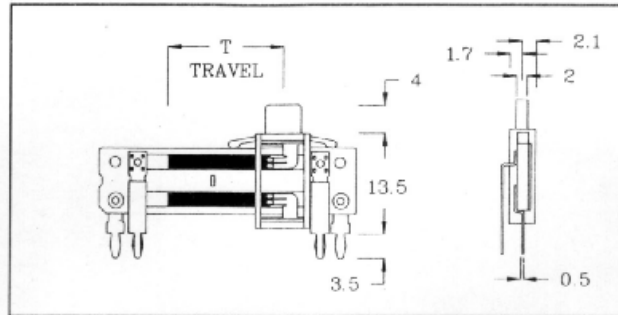


NSV□□ 1GNP



TYPE OF LEVEL :

SHAPE CODE

DIMENSION

STANDARD	8.5C	9.5C	12C

SHAPE CODE

DIMENSION

15C	8.5R	12R	15R

Only the popular items are contained in this catalogue. For products with special specifications please contact us directly.


SPECIFICATIONS 特性

ELECTRICAL 電器特性					
RESISTANCE RANGE 阻值範圍	500Ω - 1MΩ				
RESISTANCE TOLERANCE 阻值誤差	± 20%				
RESISTANCE TAPER 電阻規律	A. B. C. D. W				
RESIDUAL RESISTANCE 殘留電阻 Between Terminal 1 & 2 Between Terminal 2 & 3	10Ω - 120Ω / 10Ω - 120Ω				
POWER RATING (W) 額定功率	Travel Taper	10mm	15mm	20mm	30mm
	B	0.05	0.05	0.1	0.2
	Except B	0.025	0.025	0.05	0.1
INSULATION RESISTANCE 絕緣電阻	10MΩ Min at 250V DC				
WITHSTAND VOLTAGE 耐電壓	1 Min at 250V AC				


MECHANICAL 機械特性					
TRAVEL 行程	Series	1 Series	2 Series	3 Series	4 Series
	Travel (mm)	10,15,20,30	10,20,30	10,15,20	15,20,30
OPERATING FORCE 滑動力	10 - 200 gf. cm				
CLICK FORCE 定位阻力	20 - 150 gf. cm				
STOP STRENGTH 止擋強度	3 Kgf				
LEVER WOBBLE 滑柄振幅	1.6 mm Max (Both Side)				
SLIDING NOISE 滑動噪音	100 (Mv)				

DURABILITY 耐用性	
SLIDING LIFE 滑動壽命	10,000 Cycles

$$\frac{\text{OUTPUT VOLT ACROSS TERM 2 - 3}}{\text{INPUT VOLT ACROSS TERM 1 - 3}} \times 100\%$$

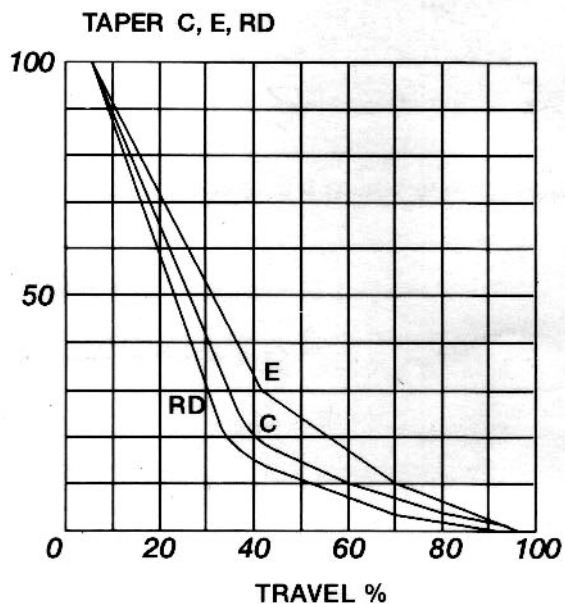

$$\frac{\text{OUTPUT VOLT ACROSS TERM 1 - 2}}{\text{INPUT VOLT ACROSS TERM 1 - 3}} \times 100\%$$

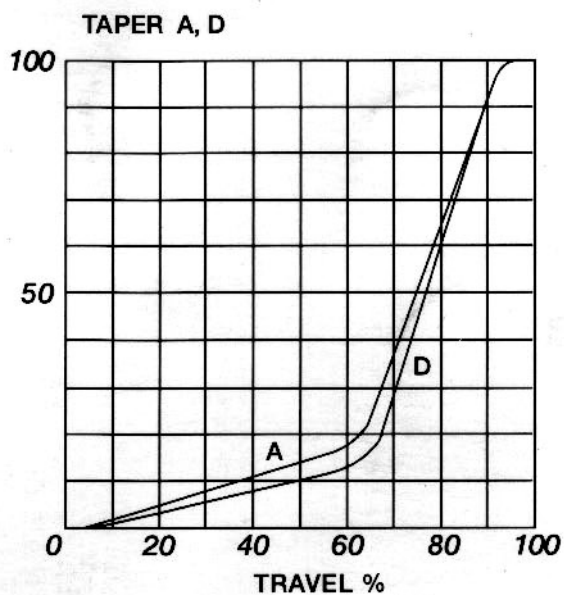

$$\frac{\text{OUTPUT VOLT ACROSS TERM 1 - 2}}{\text{INPUT VOLT ACROSS TERM 1 - 3}} \times 100\%$$

