


Front and side view




- A Image height
- B Image base
- C Frame height
- D Frame base
- E Thickness of frame
- F Overall thickness

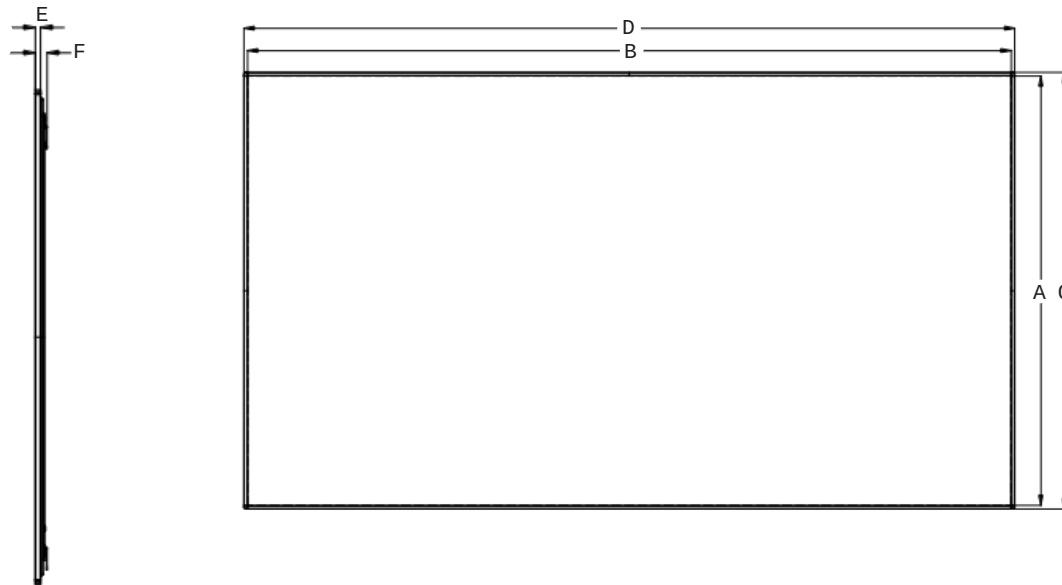

An essential for ultra-short throw projection !

Frame detail

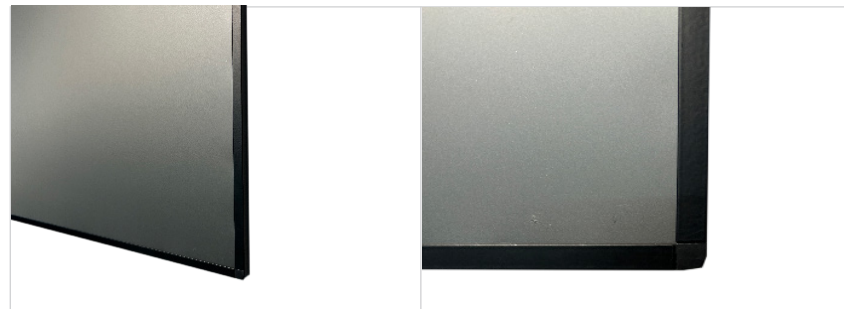

- Discreet black frame
- Grey projection surface especially developed for UST (Ultra-Short Throw) and ALR (Ambient Light Rejection)
- Gain : 1.5
- Wall mounting

Technical data

ALR SERIES 1 Reference	A cm	B cm	C cm	D cm	E cm	F cm
16:9 format						
SE1AL124221 (100")	124,5	221,4	126,5	223,4	1,35	3
SE1AL146260 (118")	146,2	260	148,2	262	1,35	3

Chemin de Beaurepaire
91410 DOURDAN - FRANCE
Tel +33 1 64 59 94 54